


optos

application guide

11.24.2025

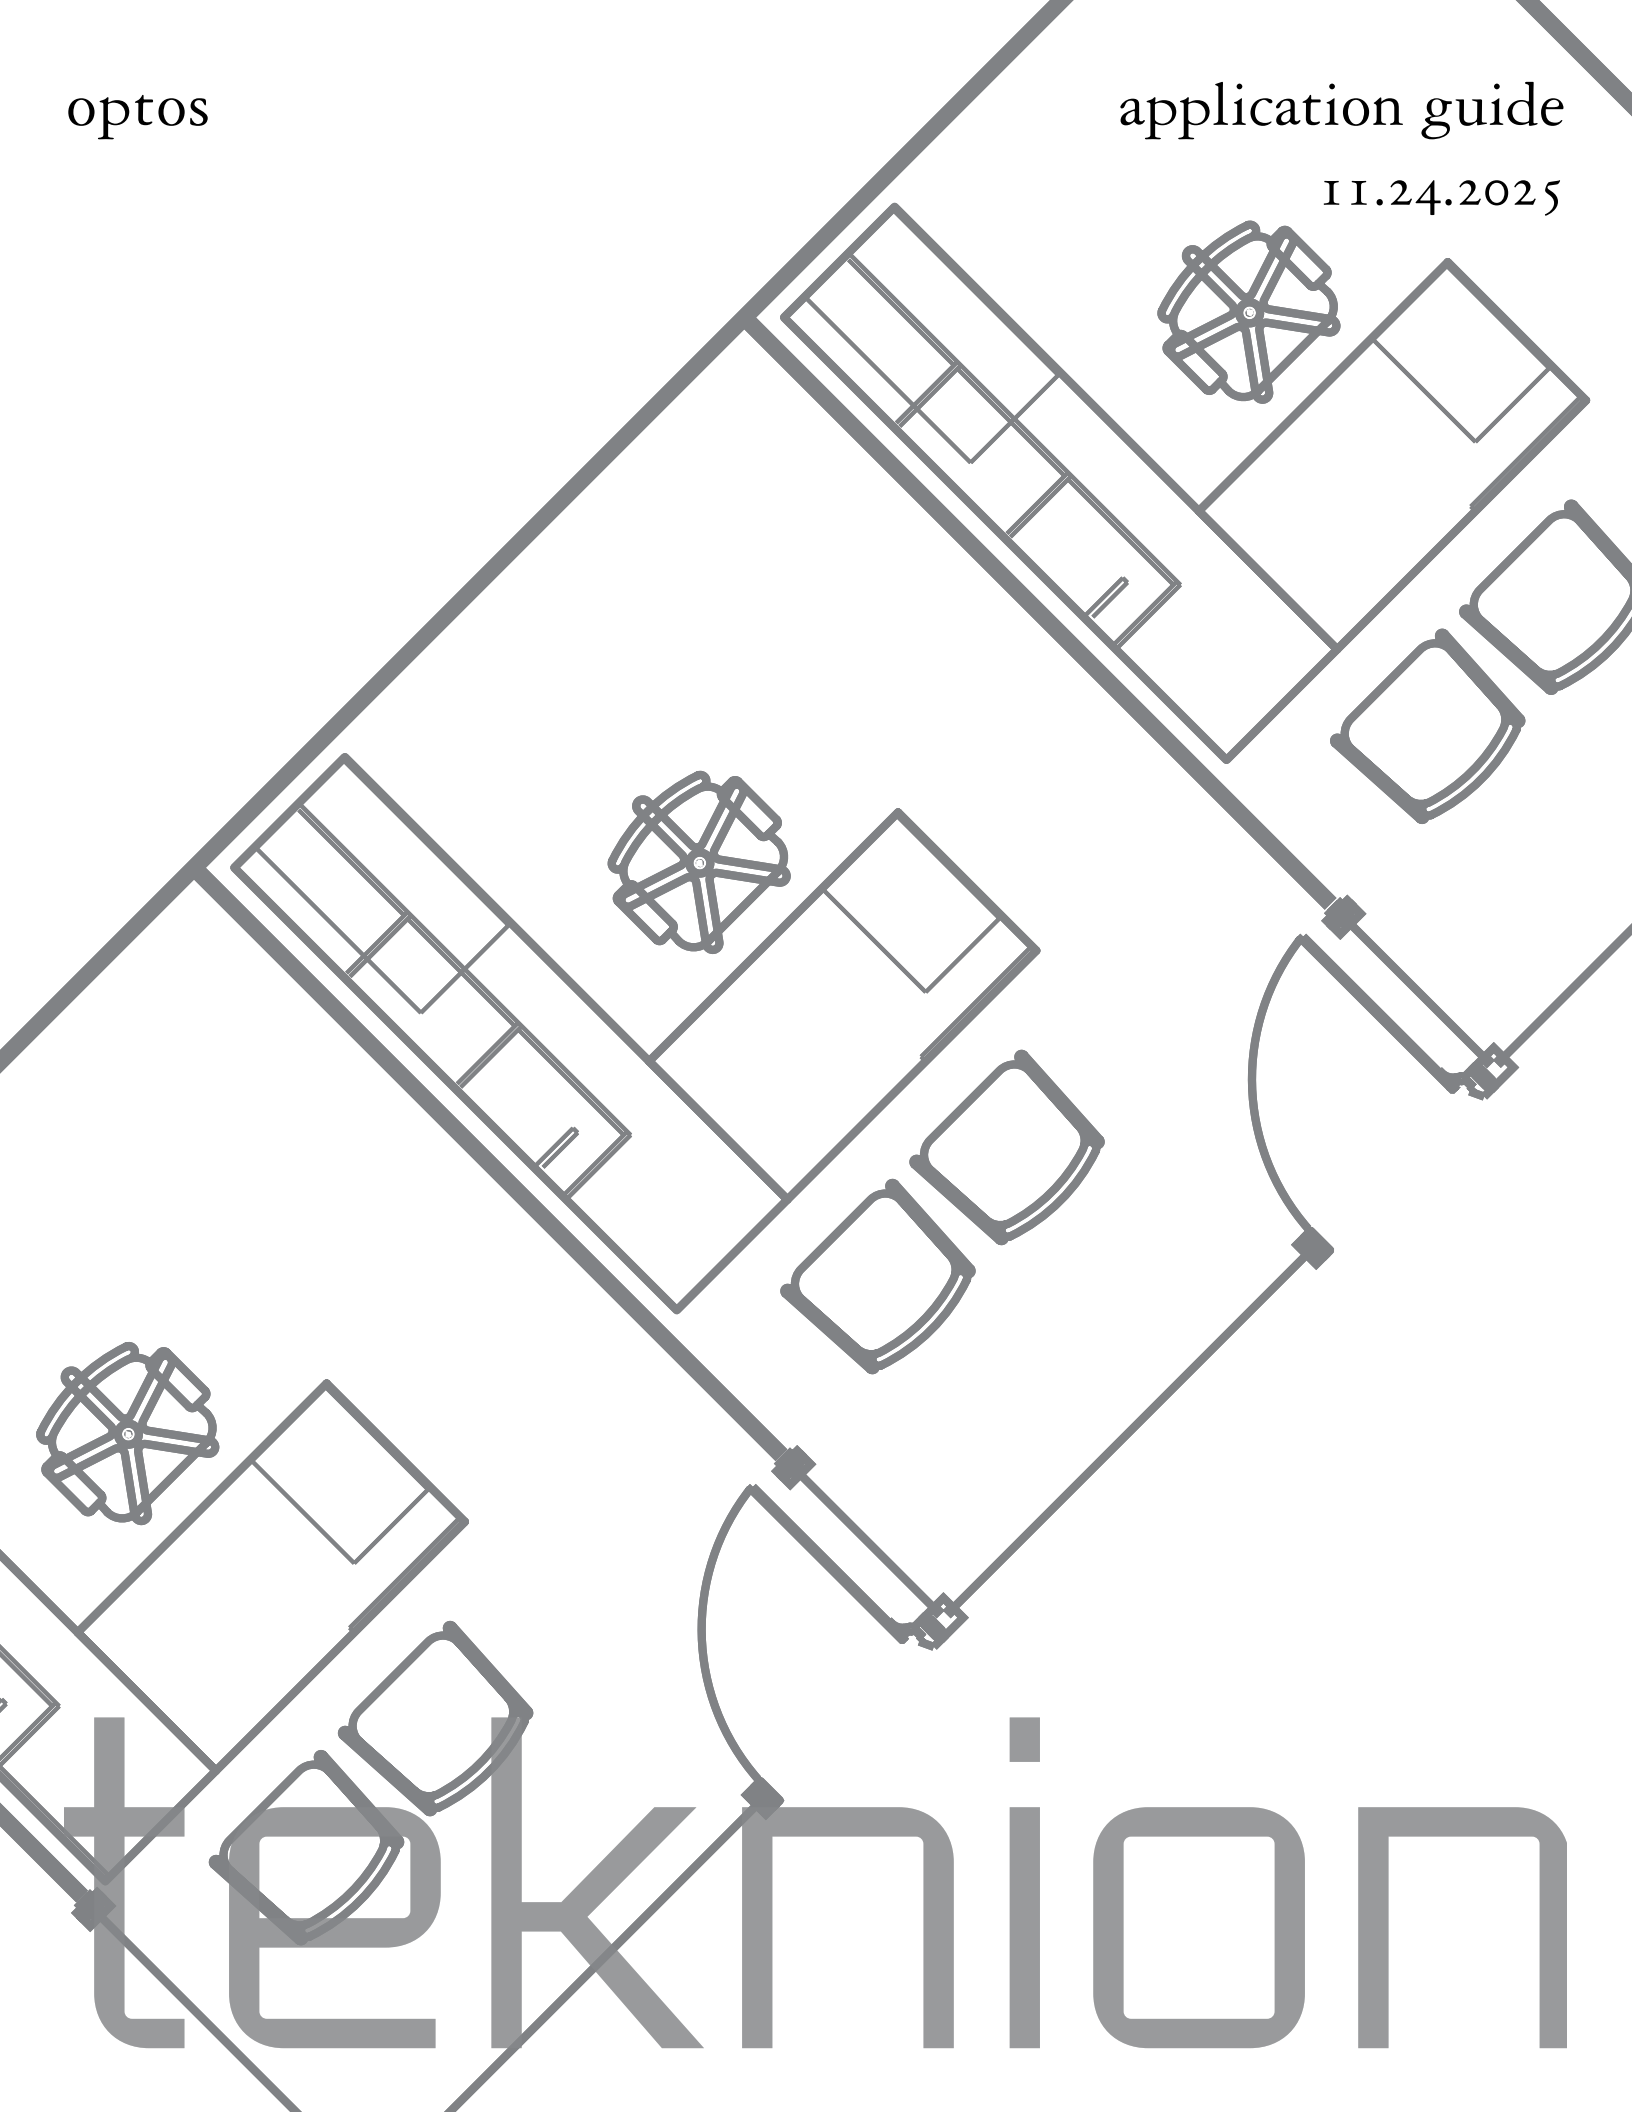

teknion

WHAT IS OPTOS 5

APPLICATION GUIDE 15

INDEX 121

PRICE & PRODUCT GUIDE. 125

update summary

Please be advised that information has been updated within the Optos Price & Application Guide. To highlight these updates, a summary has been created for your reference.

revised


November price increase has been incorporated.

Please note, first orders for new products will be accepted on November 24, 2025. All software will also be updated by November 24, 2025. If you have any questions regarding the information enclosed, please contact your Teknion Customer Service Representative.

what is optos

Optos is a seamless full-height glass wall system with a refined design aesthetic. Optos is available with either 10 or 12mm glass thickness. The wall provides full-height space division with extensive leveling tolerances as well as visual and functional integration to the Altos Wall system. The following outlines the features of Optos Walls.

Frames are available for both glass thicknesses. Codes beginning with 'FZ' denote the 10mm thickness and 'FX' denotes 12mm thickness.

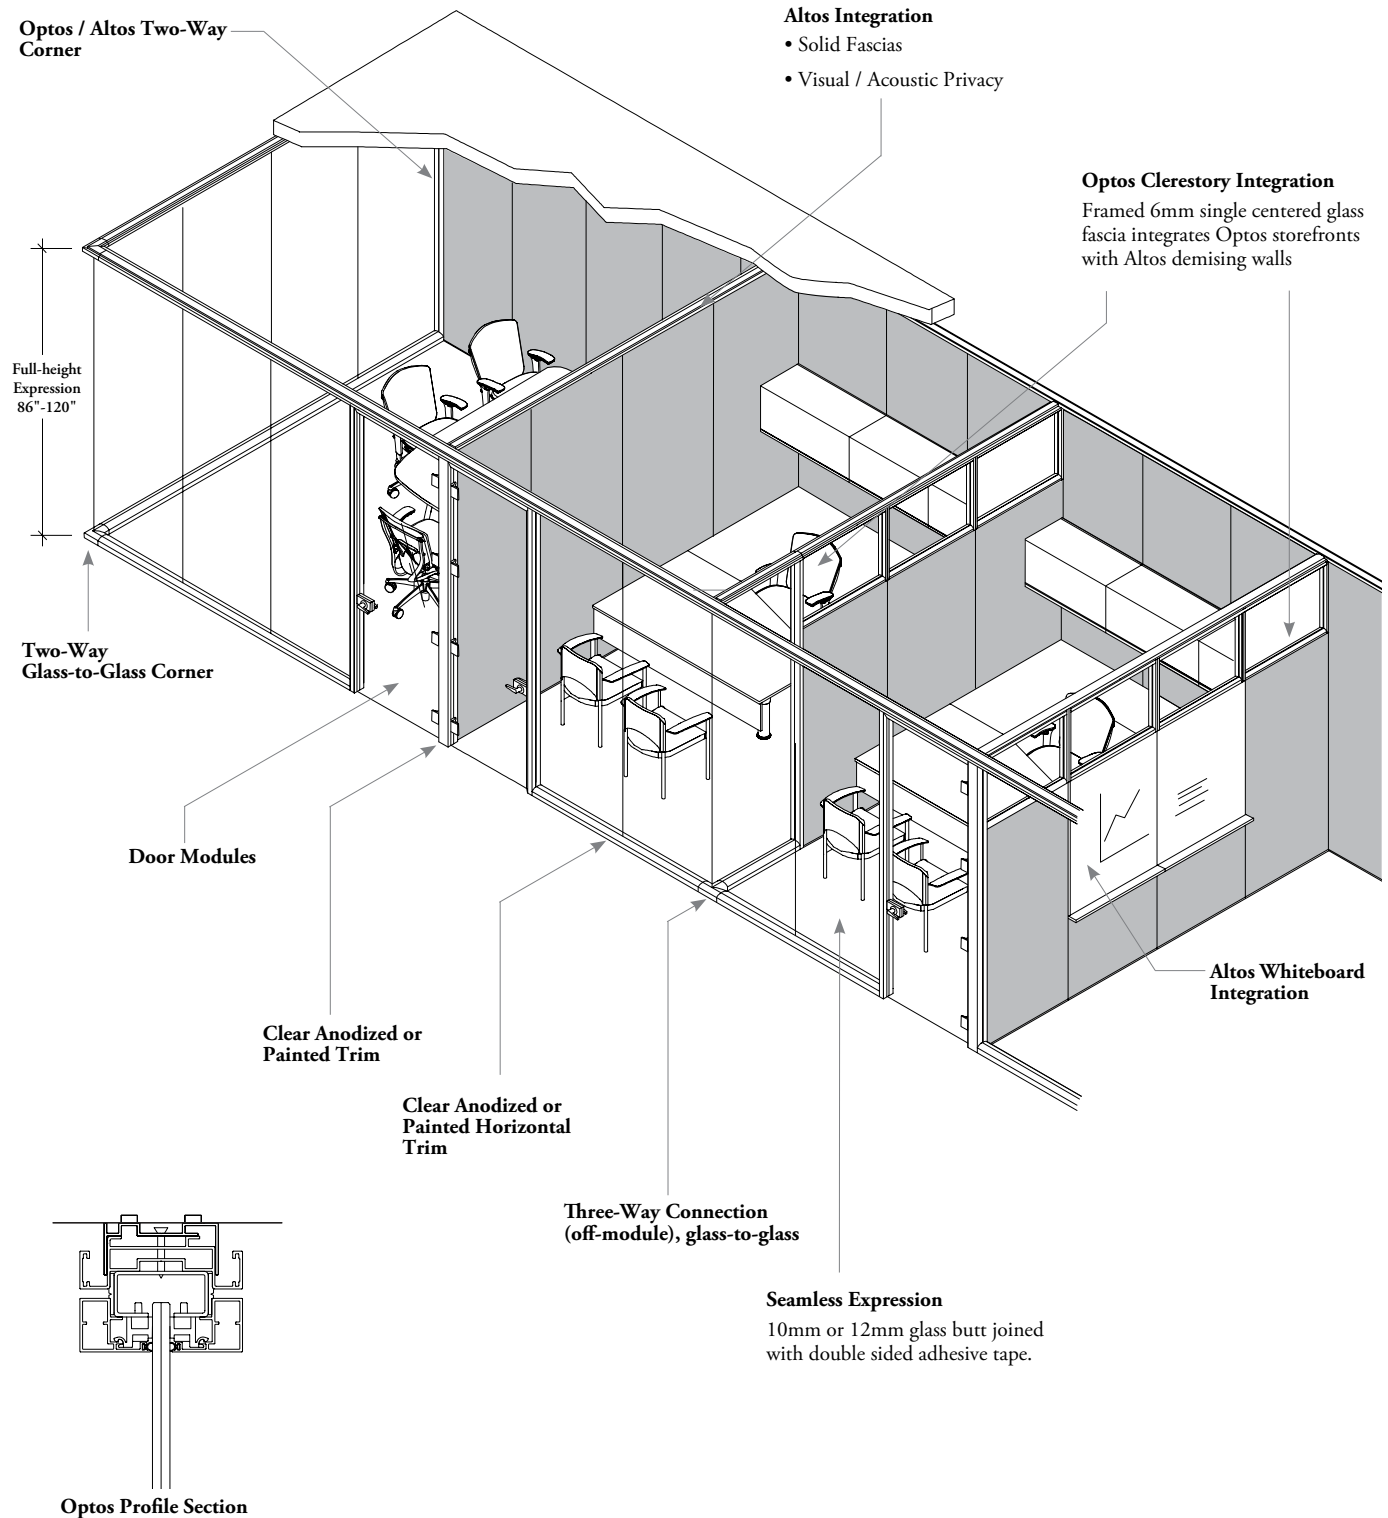


what is optos (continued)

The following outlines the planning styles available in Optos.


storefront planning formats with optos:

Glass partition system shall be capable of spanning lengths up to 26'0" for 10mm Glass and 40'0" for 12mm glass without vertical support and/or perpendicular wall intersection.

straight runs with 90° corners

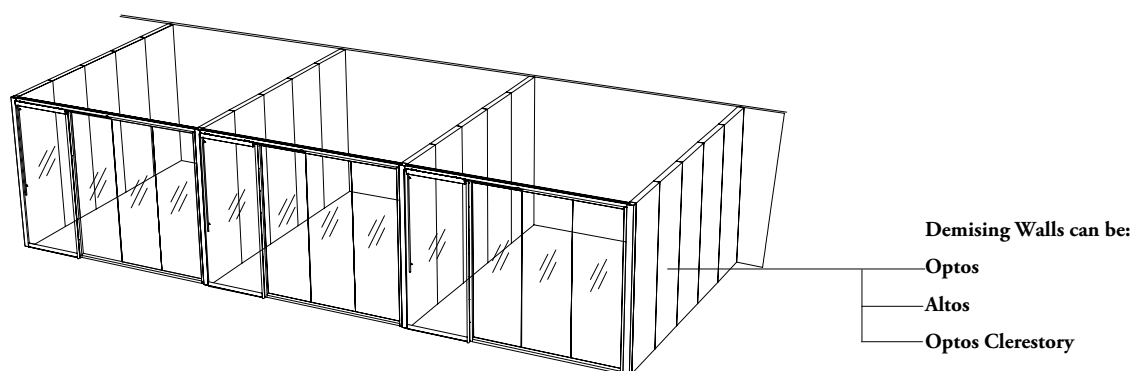


straight runs with articulating corners

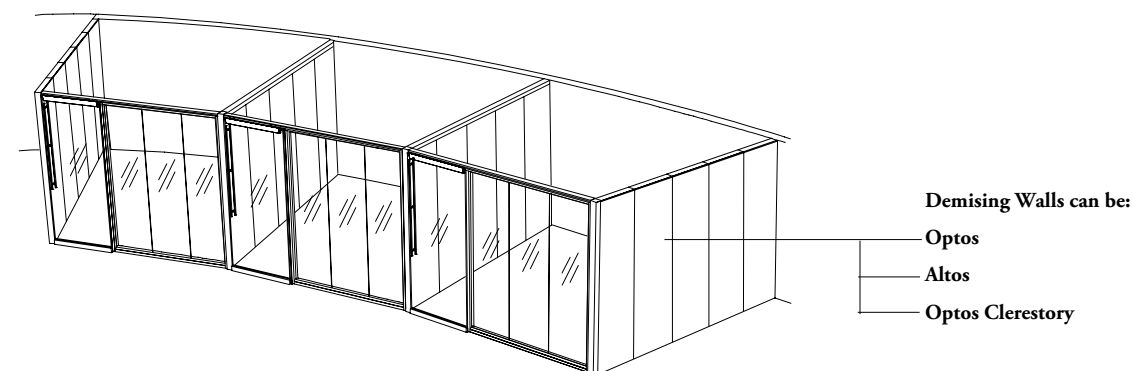


what is optos

planning possibilities


The following demonstrates the planning possibilities available in Optos.




private office storefront
with drywall partition

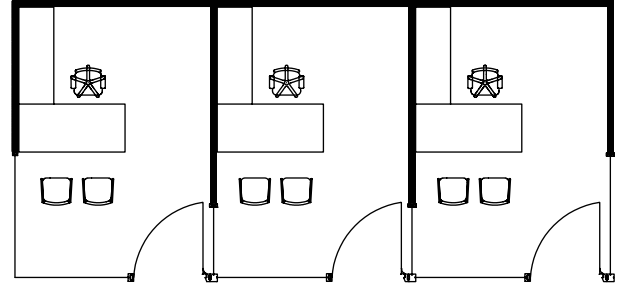


long store front private offices
with drywall partition

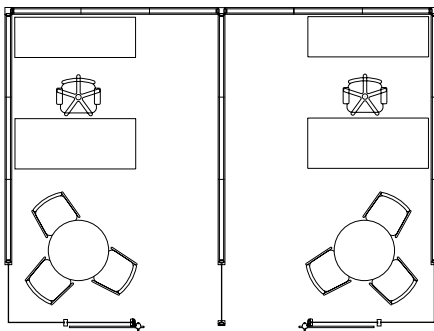


optos / altos integration

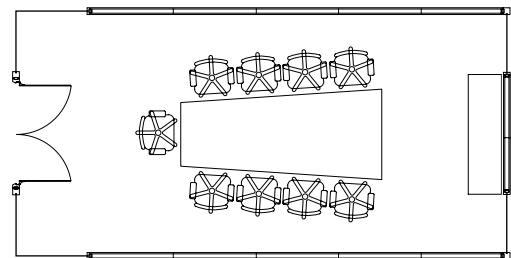

optos / altos boardroom

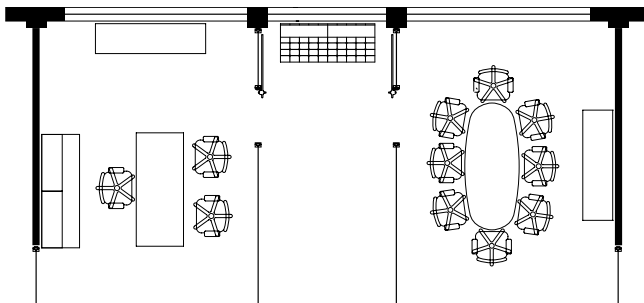


optos / building integration

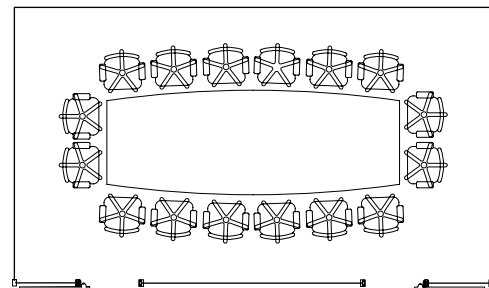

optos boardroom

what is optos

planning possibilities (continued)

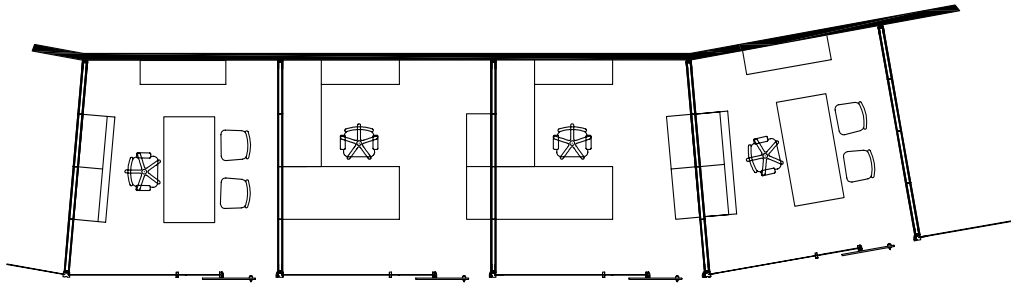

optos with articulating corners / altos / building integration


The following should be considered when planning with Optos.

Step 1:


survey building site

Before starting to plan with Optos, the following important steps should be taken:

- Use a laser level to shoot the whole site and find the high and low spots in the floor and ceiling and determine the minimum floor to ceiling height

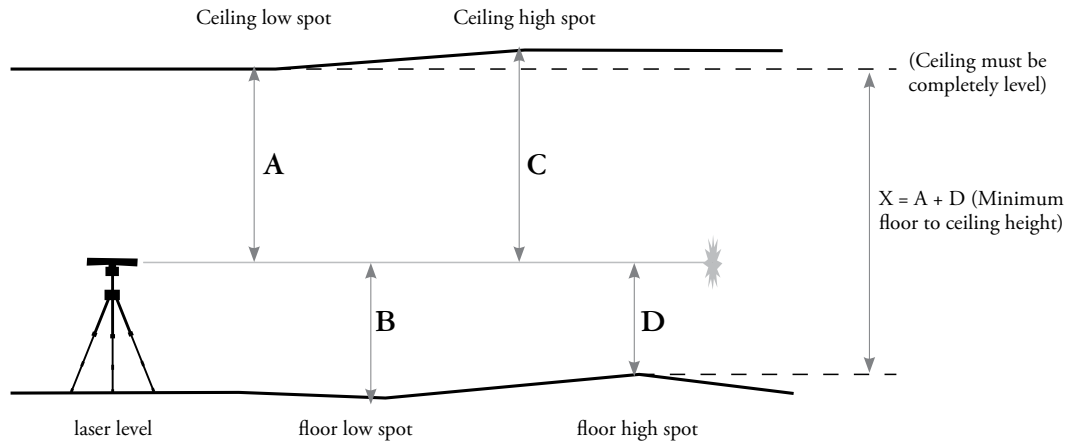

- When attaching Optos to a bulkhead, ceiling must be level and flatness should not exceed more than 3/16" over 10'
- The floor should be flat and level, the maximum floor level tolerance is 2" over a single run
- If the ceiling is a suspended grid, the grid must be completely level and flat with a tolerance of 3/16" over 10'
- Direct fastening to the grid is done with ceiling clips
- Consider the location of HVAC ducts and lighting panels on the ceiling before laying out the wall runs
- Plan with Optos to optimize the amount of natural light that will flow into corridors for energy saving and LEED credits

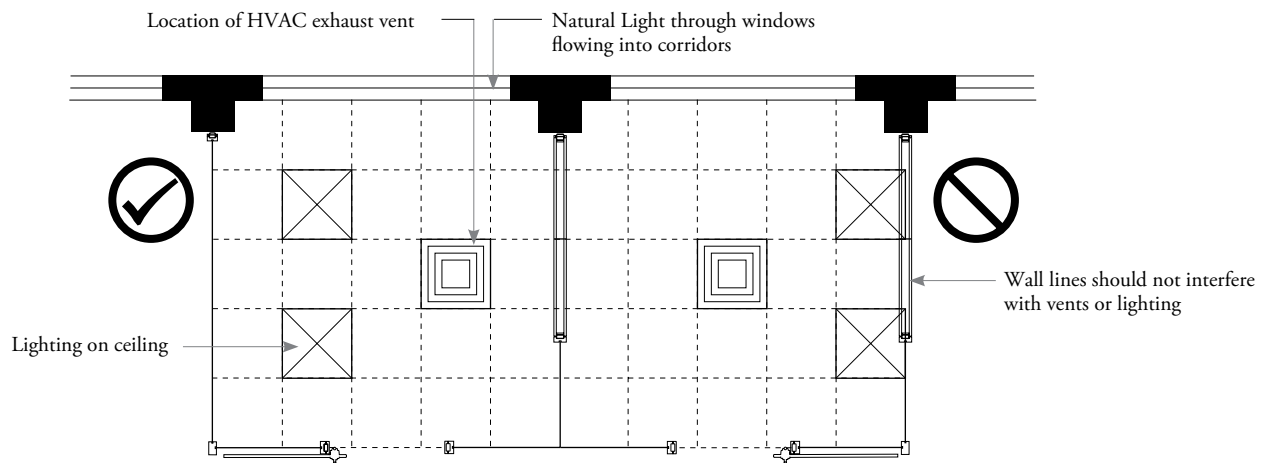

planning considerations (continued)

Step 2:

planning wall runs

Optos glass walls are specified as wall runs between two points. There are two types of runs:

1. runs which end


Termination points, ending at:

- A** Finished wall end
- B** Wall start from building
- C** Filler panel from a building

2. runs which join


Termination points, ending at:

- D** Optos to Optos corners two-way, three-way or four-way
- E** Optos to Altos corners two-way, three-way, four-way or Inlines
- F** Optos Door Modules

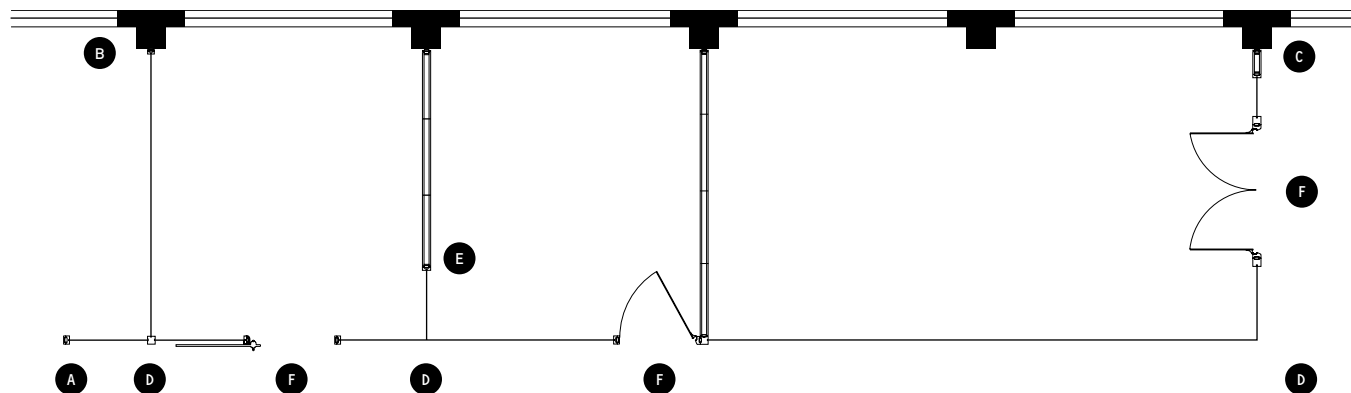


Three wall run conditions can occur:


end to end

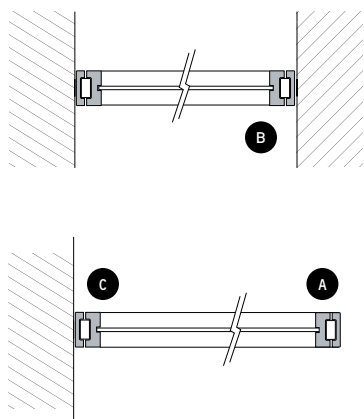

end to joint

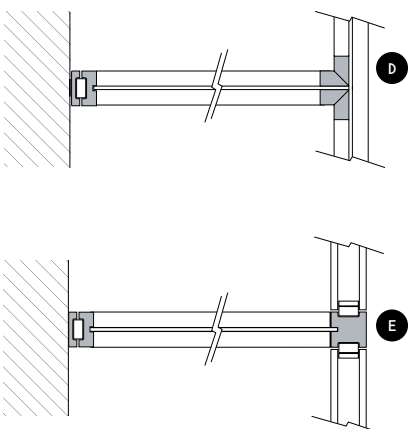

joint to joint



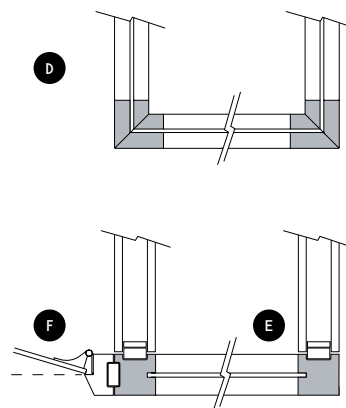


planning considerations (continued)

Step 3:

planning with existing building architecture

- ❶ Planning storefront corner layouts with a three-way connection allows for adjustments for building tolerances
- ❷ Planning with filler panels allows for tolerance around the buildings structure, as filler panels are solid and can be modified in width on-site

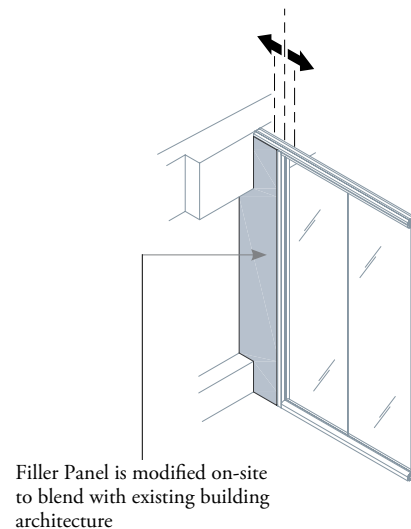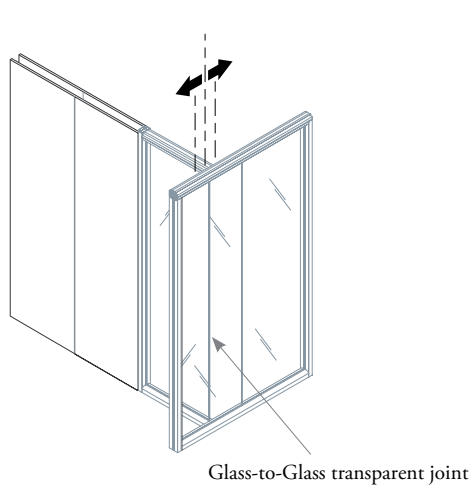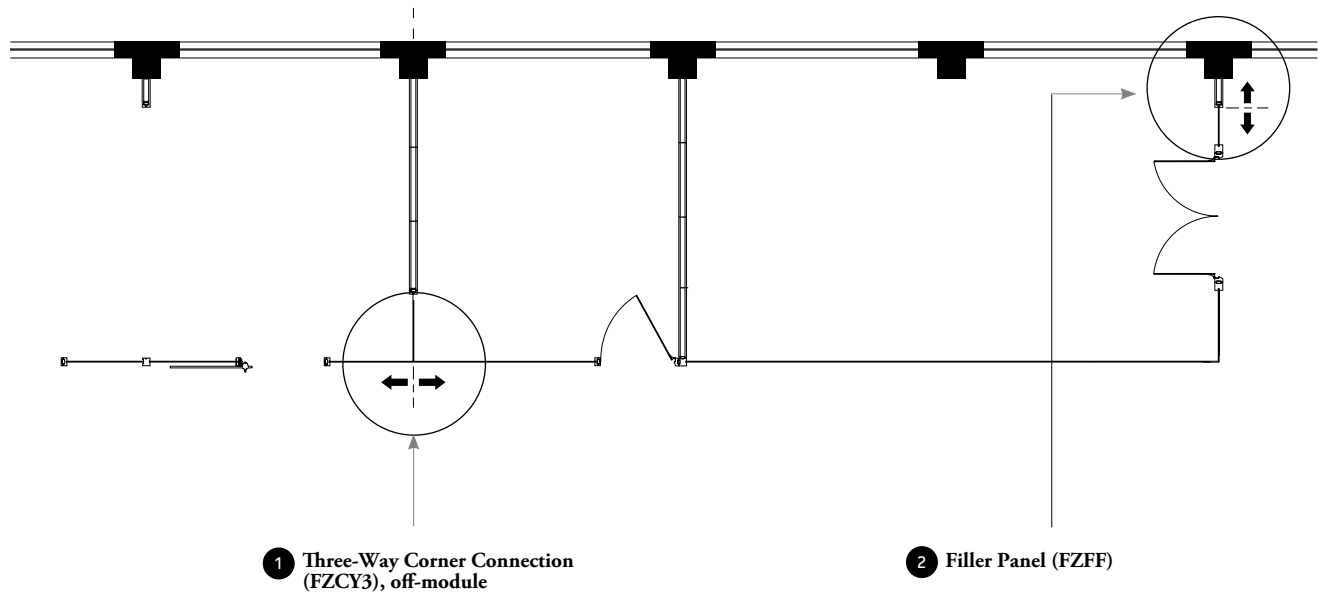


planning considerations (continued)


Step 4:

planning a typical optos / altos environment

- 1 Optos provides a seamless full-height glass enclosure, with integrated door solutions, making it ideal for planning storefront applications

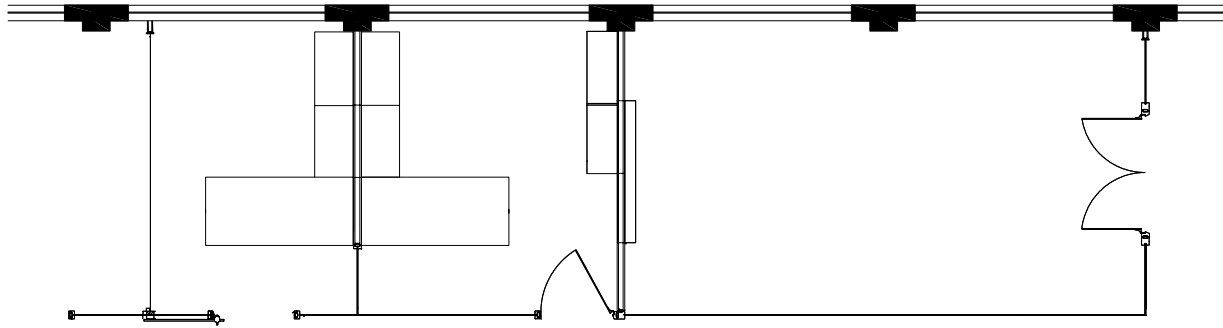

- 2 Altos is a solid full-height functional wall that provides visual privacy and support whiteboards, tackboards, worksurfaces and storage

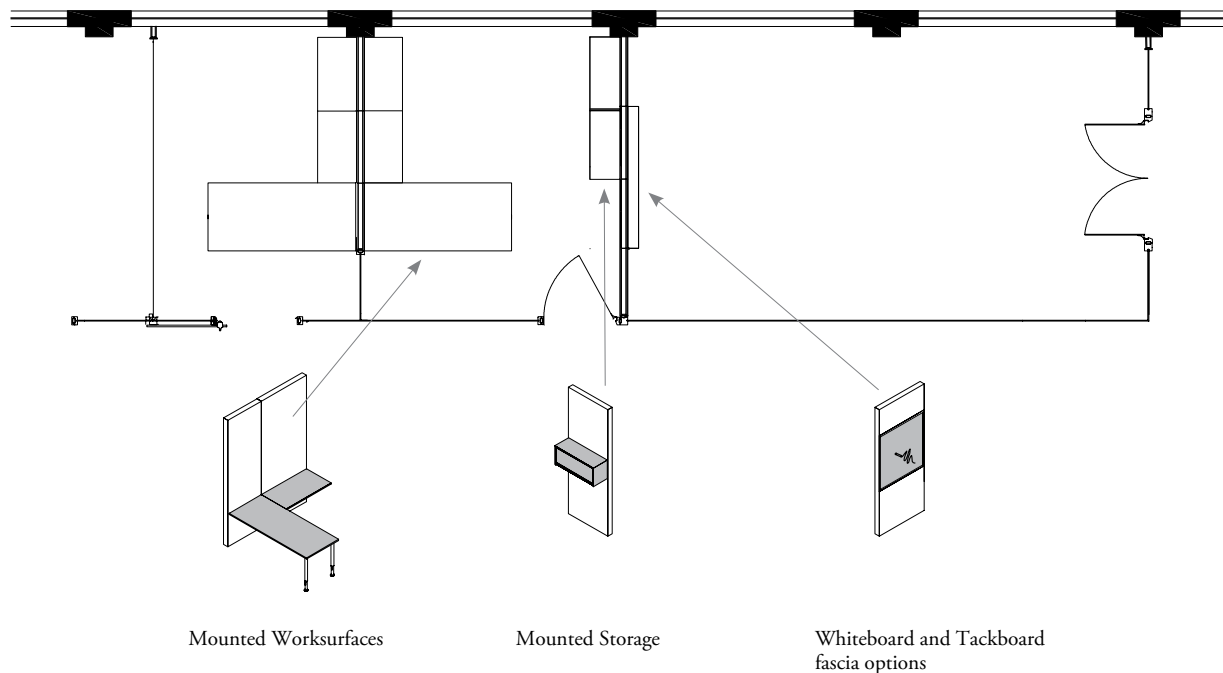


- 3 Optos is planned as a continuous run of transparent glass, from one end or join to another. The glass modules are equal in width to optimize seams. Altos is a modular system and the width of a module is specified in the build-up approach to create a wall. There is no designed relationship between Optos glass widths and Altos modules

planning considerations (continued)

Step 5:

planning for furniture and door locations


When planning with Optos, the location of the door with respect to furniture must be considered.

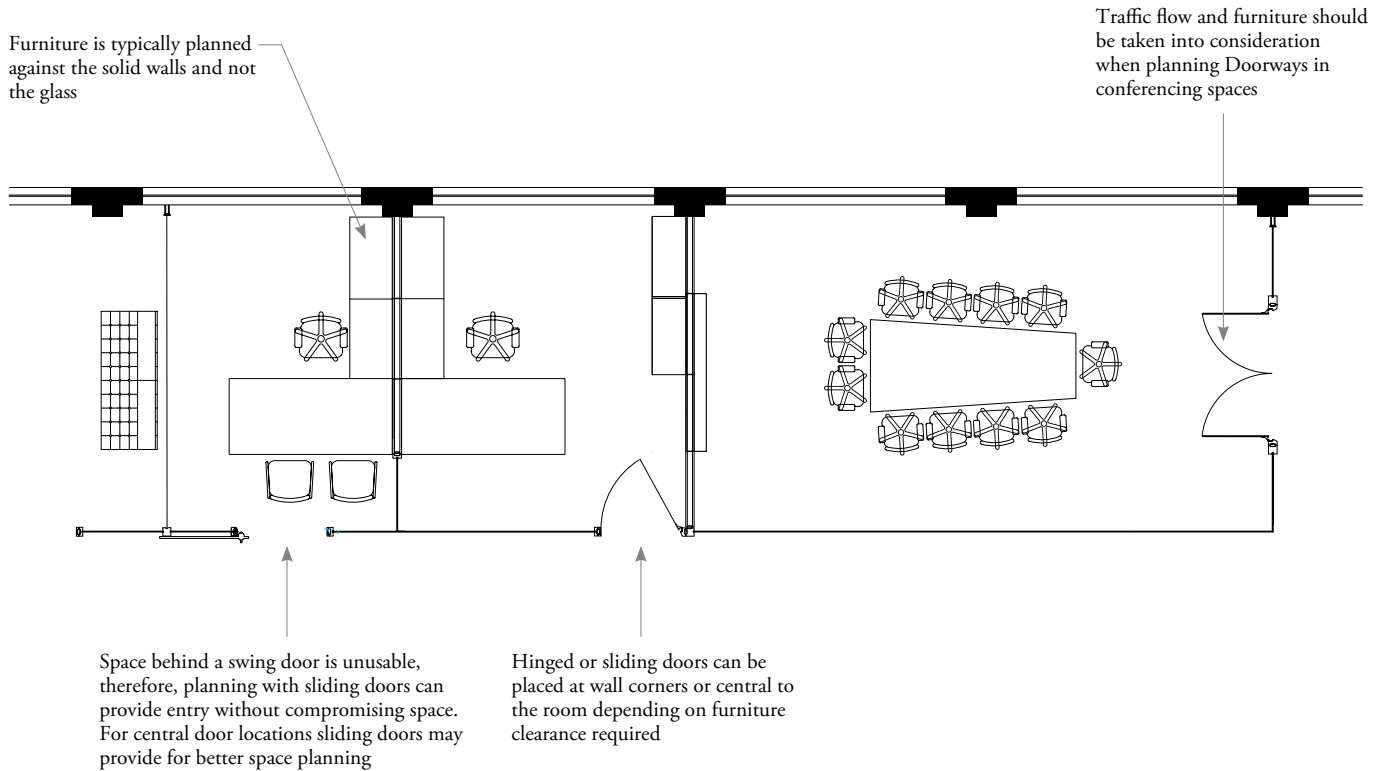

Note:

For Double Glazed Pivot Doors more nodes are required in the door swing area to specify the appropriate door increment for a tailored fit. See [Planning with Double Glazed Swing Doors](#) section for more details.

Door Height Measurement Points

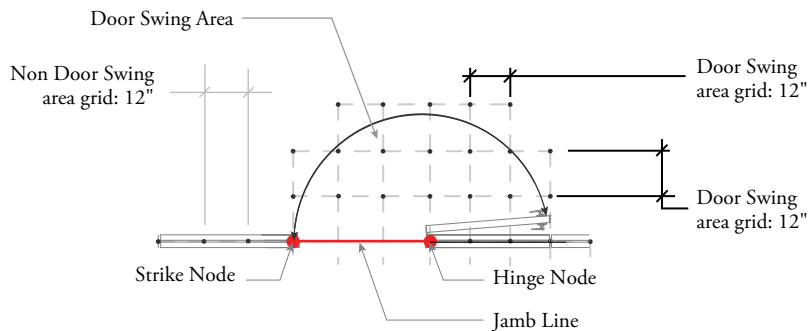

application guide

application guide

PRODUCT MAPS16

FRAMES39

FASCIAS51

DOORS57


CORNERS & CONNECTIONS95

CLERESTORY109


ELECTRICS117

frames – 10mm

F Z W S Adjustable Wall Start




F Z F F S Variable Angle Wall Start




F Z F E Wall End




F Z F P Ceiling Top Spacer




F Z F C Ceiling Frame Beam




F Z F B Base Frame & Channel Assembly




F Z F K Frame Splice Kits




F Z F V Vertical Post




F Z F T V Vertical Trim




F Z F T Horizontal Trim



F Z F F Filler Panel




F Z P Ceiling Supports




frames – 10mm (continued)

F Z T Installation Tools

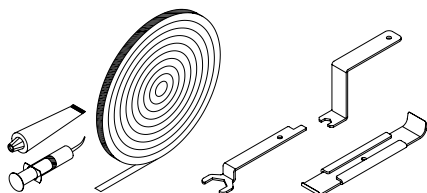


frames – 12mm


F X W S Adjustable Wall Start




F X F F S Variable Angle Wall Start




F X F P Ceiling Top Spacer




F X F C Ceiling Frame Beam




F X F B Base Frame & Channel Assembly




F X F K Frame Splice Kits




F X F V Vertical Post




F X F T V Vertical Trim




F X F T Horizontal Trim



F X F F Filler Panel



F X P Ceiling Supports




fascias – 10mm


F Z G P Glass Panel



F Z G K Glass Assembly Hardware Kit



F Z A K Activator Kit



F Z S Electrical Side Panel





fascias – 12mm

F X G P Glass Panel

F X G K Glass Assembly Hardware
Kit

F X S Electrical Side Panel




doors

F Z S S H L Solid Hinged Door Leaf Single




F Z S N H L Solid Hinged Door with Glass Insert Single




F Z S G H L Glass Hinged Door Leaf Single




F Z D G H L Glass Hinged Door Leaf Double



F Z S G P L Glass Pivot Door Leaf Single




F Z C L Framed 45mm Double Glazed Pivot Door Leaf Single




F Z S G S L Glass Sliding Door Leaf Single




F Z S S S L Solid Sliding Door Leaf Single



F Z S N S L Solid Sliding Door Leaf with Glass Insert Single



F Z D G S L Glass Sliding Door Leaf Double



Leaves

doors (continued)


F Z S S H F Solid Hinged Door Jamb Kit Single




F Z S G H F Glass Hinged Door Jamb Kit Single



F Z D G H F Glass Hinged Door Jamb Kit Double




F Z S G P F Glass Pivot Door Jamb Kit Single




F Z C J 45mm Glass Pivot Door Jamb Kit Single




F Z S G S J Glass Sliding Door Jamb Kit Single




F Z S S S J Solid Sliding Door Jamb Kit Single




F Z D G S J Glass Sliding Door Jamb Kit Double




F Z S F S R Sliding Door Fixed Rail Single



F Z D F S R Sliding Door Fixed Rail Double



F Z S E S R Sliding Door Extended Rail Single




F Z D E S R Sliding Door Extended Rail Double




doors (continued)

Handles

**F Z H S X Door Handle Schlage
ALX Series**




**F Z H S L Door Handle Schlage L
Series**




F Z S C P Door Handle Ceiling Pull




F Z S F P Door Handle Floor Pull



F Z S L P Door Handle Linear Pull




F X K K Control Key




corners & connections – 10mm


F Z C Y 2 Two-Way 90° Corner Connection



F Z C Y 2 E Two-Way Connection for Sliding Door Rail




Door End or Glass,
Door End or Glass




Door Start, Door End
(left or right handed)

F Z F C F 2 Two-Way Articulating Corner Connection




Glass (Left)




Door (Left)


F Z C Y 3 Three-Way Corner Connection




F Z C Y 3 D Three-Way Corner Connection Between Doors



F Z C Y 3 E Three-Way Connection for Sliding Door Rails




Door End or Glass,
Door End or Glass




Door Start, Door End
(left or right handed)


F Z F C F 3 Three-Way Articulating Corner Connection




Two Glass



One Glass; One
Door (Right)




One Glass; One
Door (Left)




Two Doors

corners & connections – 10mm (continued)


F Z C Z 2 Two-Way 90° Corner Connection with Door

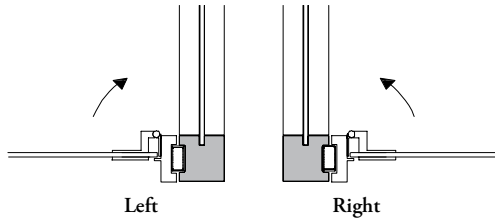


F Z C Z 3 F Three-Way Connection with One Door

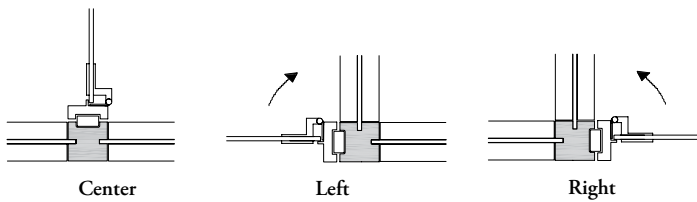


F Z C Z 3 B Three-Way Connection with Two Doors




F Z C A 1 180° Connection with Altos

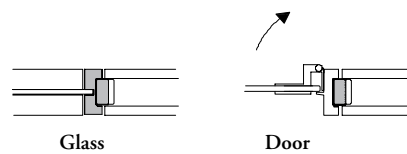

F Z C A 2 Two-Way 90° Connection with Altos



F Z C A 2 F Two-Way Connection for Sliding Door Rail End with Altos




Optos to Optos


Optos to Altos

corners & connections – 10mm (continued)


F Z F C A 2 Two-Way Articulating Connection with Altos

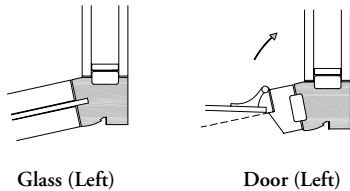


F Z C A 3 A Three-Way Connection with Altos – Two Optos at 90°

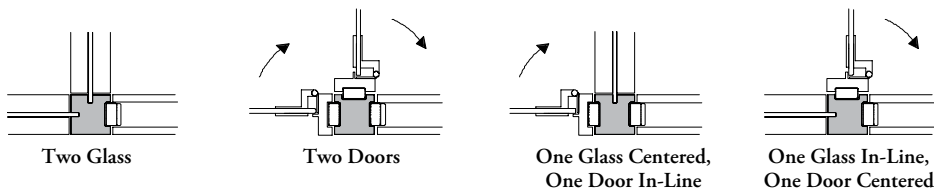


F Z C A 3 B Three-Way Connection with Altos – Two Optos at 180°

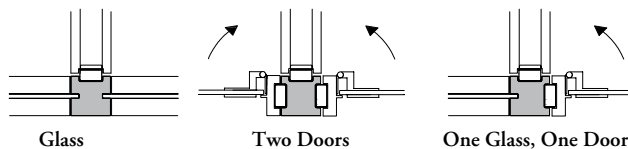

F Z C A 3 C Three-Way Connection with Altos – Two Altos at 90°

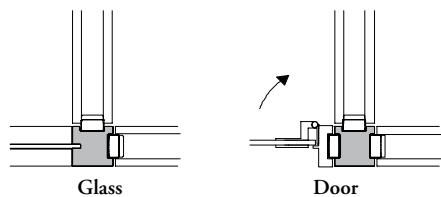


F Z C A 3 D Three-Way Connection with Altos – Two Altos at 180°

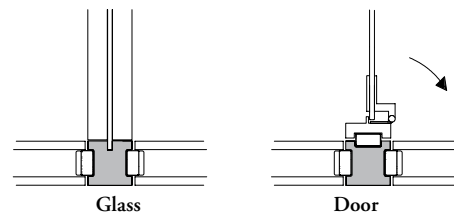


corners & connections – 10mm (continued)


F Z C A 3 E Three-Way Connection with Altos for Sliding Door Rails

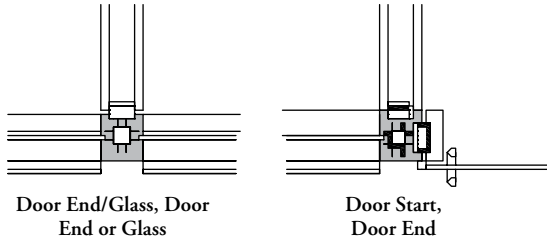

F Z F C A 3 Three-Way Articulating Connection with Altos

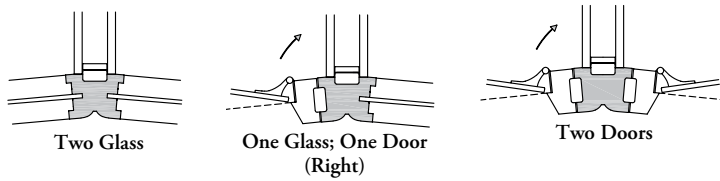

F Z C A 4 B Four-Way Connection with Altos – Two Optos at 180°

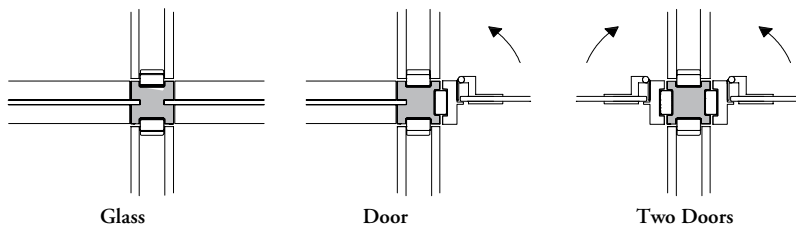


Optos to Altos


corners & connections – 10mm (continued)

F Z C W 2 Two-Way Connection with Drywall

**F Z C W 2 F Two-Way Connection with Drywall
for Sliding Door Rail End**

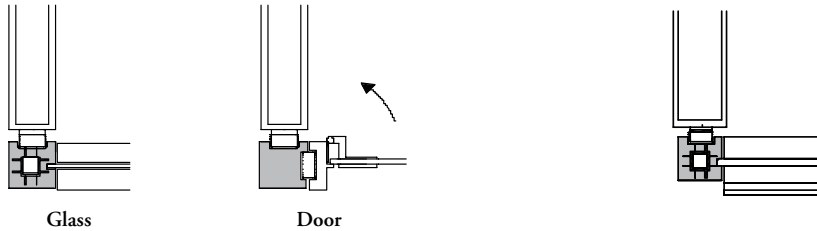

F Z C W 3 Three-Way Connection with Drywall

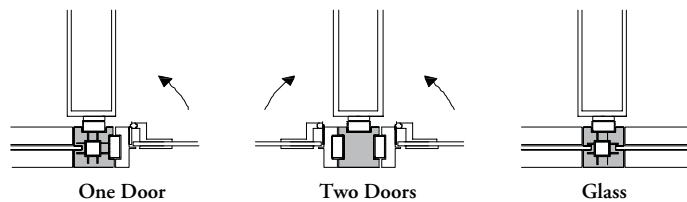


**F Z C W 3 E Three-Way Connection with
Drywall for Sliding Door Rails**




Optos to Drywall

corners & connections – 12mm


F X C Y 2 Two-Way 90° Corner Connection



F X C Y 2 E Two-Way Connection for Sliding Door Rail




Door End or Glass,
Door End or Glass




Door Start, Door End
(left or right handed)


F X C Y 3 Three-Way Corner Connection




F X C Y 3 D Three-Way Corner Connection Between Doors



F X C Y 3 E Three-Way Connection for Sliding Door Rails




Door End or Glass,
Door End or Glass




Door Start, Door End
(left or right handed)

F X C Z 2 Two-Way 90° Corner Connection with Door




Left




Right


F X C Z 3 F Three-Way Connection with One Door



Center



Left





Right

corners & connections – 12mm (continued)




F X C Z 3 B Three-Way Connection with Two Doors

F X C A 1 180° Connection with Altos





F X C A 2 Two-Way 90° Connection with Altos

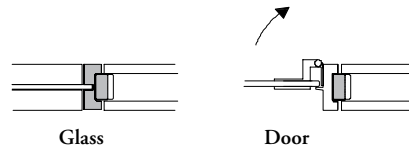




F X C A 2 F Two-Way Connection for Sliding Door Rail End with Altos



F X C A 3 A Three-Way Connection with Altos – Two Optos at 90°




F X C A 3 B Three-Way Connection with Altos – Two Optos at 180°




corners & connections – 12mm (continued)


F X C A 3 C Three-Way Connection with Altos – Two Altos at 90°

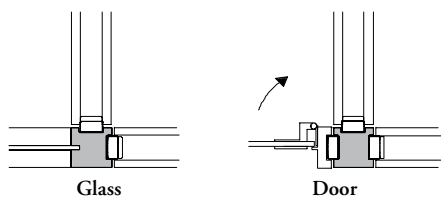


F X C A 3 D Three-Way Connection with Altos – Two Altos at 180°

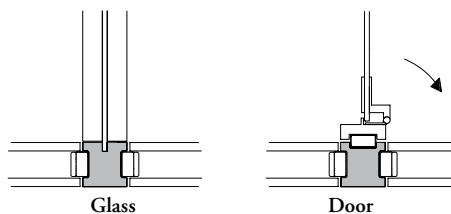

F X C A 3 E Three-Way Connection with Altos for Sliding Door Rails

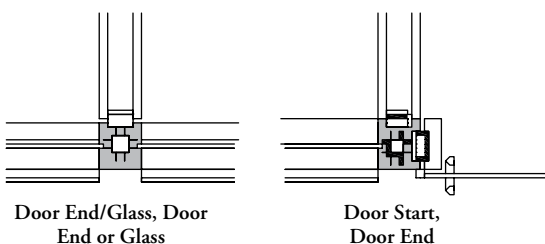

F X C A 4 B Four-Way Connection with Altos – Two Optos at 180°

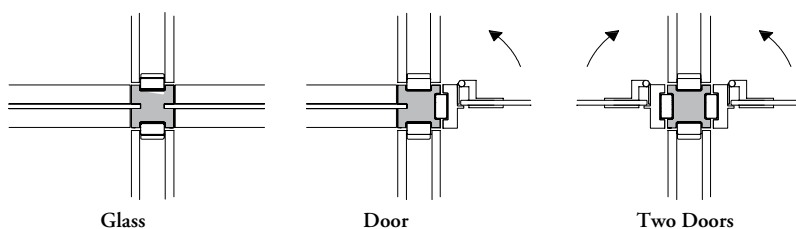


Optos to Altos


corners & connections – 12mm (continued)

F X C W 2 Two-Way Connection with Drywall

**F X C W 2 F Two-Way Connection with Drywall
for Sliding Door Rail End**

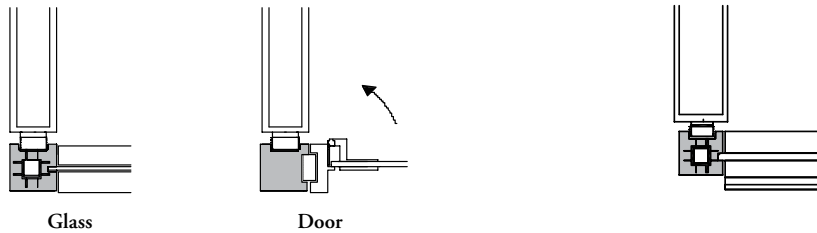

F X C W 3 Three-Way Connection with Drywall

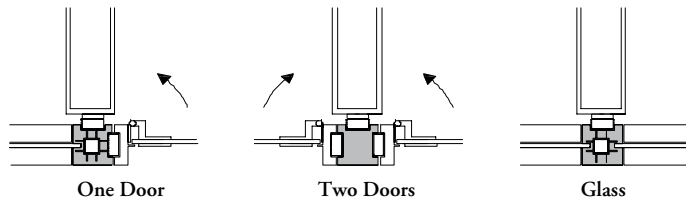


**F X C W 3 E Three-Way Connection with
Drywall for Sliding Door Rails**




Optos to Drywall

clerestory – 10mm

FZCGM Clerestory Glass Module




FZCFV Clerestory Vertical Post




In-Line Connections

FZCCX1 Clerestory In-Line Connection with Optos




Two-Way Connections


FZCC2F Clerestory Two-Way Connection for Sliding Door Rail End



FZCCX2 Clerestory Two-Way 90° Corner Connection with Optos




Glass




One Door

FZCCA2 Clerestory Two-Way 90° Corner Connection with Altos




FZCCY2 Clerestory Two-Way 90° Corner Connection




clerestory – 10mm (continued)


FZCCX3 Clerestory Three-Way Connection with Optos

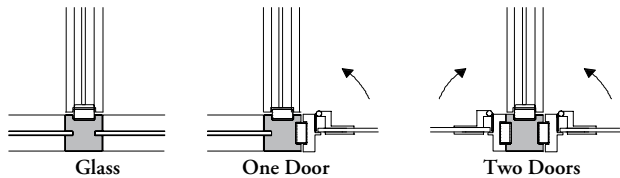

FZCCY3 Clerestory Three-Way Connection




FZCCA3 Clerestory Three-Way Connection with Altos




Three-Way Connections

clerestory – 12mm

FXCGM Clerestory Glass Module




FXCFV Clerestory Vertical Post




In-Line Connections


FXCCX1 Clerestory In-Line Connection with Optos




FXCC2F Clerestory Two-Way Connection for Sliding Door Rail End



FXCCX2 Clerestory Two-Way 90° Corner Connection with Optos




Glass




One Door

Two-Way Connections

FXCCA2 Clerestory Two-Way 90° Corner Connection with Altos




FXCCY2 Clerestory Two-Way 90° Corner Connection




clerestory – 12mm (continued)

FXCCX3 Clerestory Three-Way Connection with Optos

FXCCY3 Clerestory Three-Way Connection

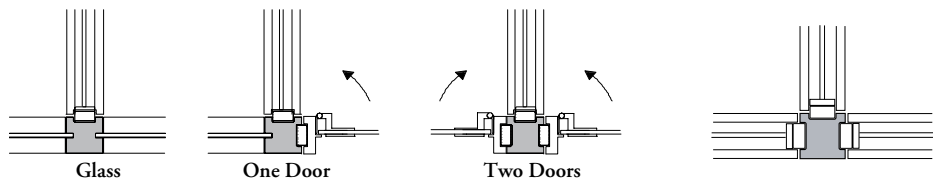


FXCCA3 Clerestory Three-Way Connection with Altos




Three-Way Connections

E R M Receptacle Module



E L S Light Switch



frames –
10mm & 12mm



frames – 10mm & 12mm

FRAME BASICS	40
PLANNING WITH CEILING CLIPS	42
PLANNING WITH FRAMES	44
PLANNING WITH WALL STARTS	47
PLANNING WITH TRIMS	48

frame basics


Optos frames consist of Ceiling Components, Base Components and Vertical Components and is available in two glass thicknesses, 10mm and 12mm for added sound attenuation.

- The maximum length of horizontal frame components are 120" (to fit most freight elevators)
- The horizontal frame elements come in lengths of 36", 48", 72", 96" and 120" and are cut for a precise fit on site with minimal waste
- Vertical trims are available in heights from 86" - 120" and follow ceiling height specifications
- All 10mm component codes begin with "FZ" and all 12mm component codes begin with "FX"

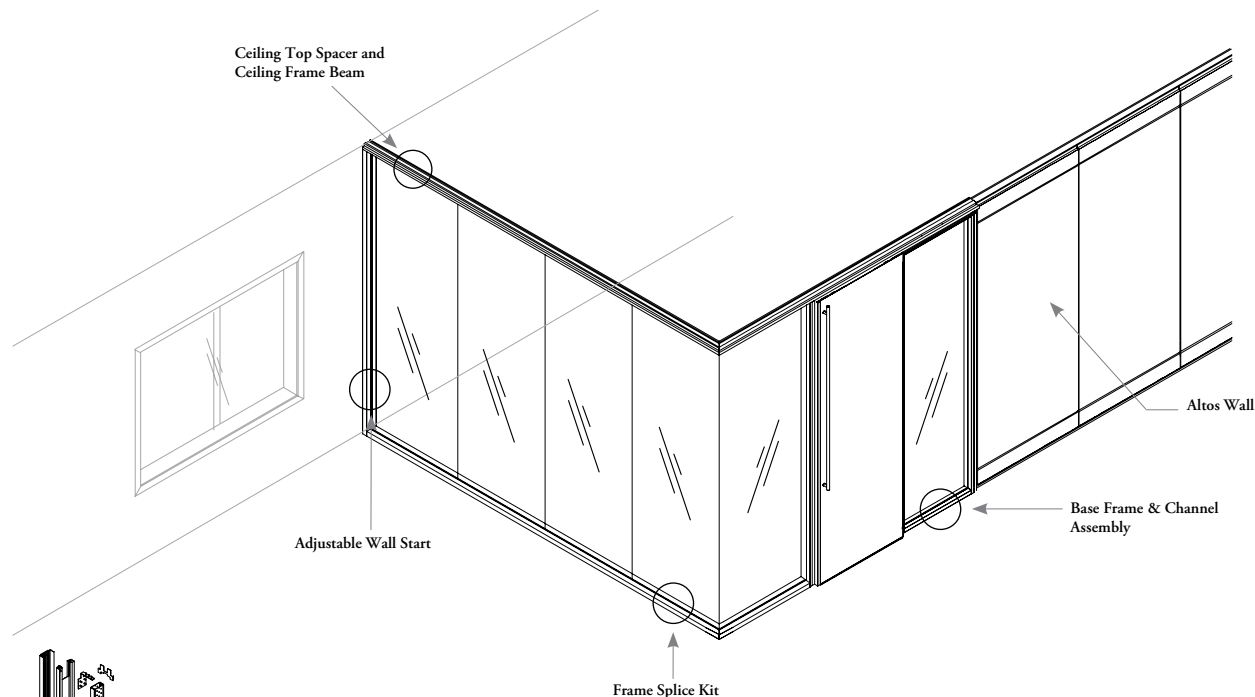


Adjustable Wall Start (FZWS/FXWS)

- Used at the beginning and end of runs connecting to a building
- Accommodate minor width variation of +/- 3/8"




Ceiling Top Spacer (FZFP/FXFP)

Connects to the building ceiling.




Ceiling Frame Beam (FZFC/FXFC)

Provides structure and drillings for the glass clips and Vertical Post Brackets.



Base Frame & Channel Assembly (FZFB/FXFB)

Attaches to the floor and provides the leveling capability.




Frame Splice Kit (FZFK/FXFK)

Required to connect two Base Frame & Channel Assemblies (FZFB) or two Ceiling Top Spacers (FZFP) for 10mm and Base Frame & Channel Assemblies (FXFB) or two Ceiling Top Spacers (FXFP).


application guide

frame basics (continued)

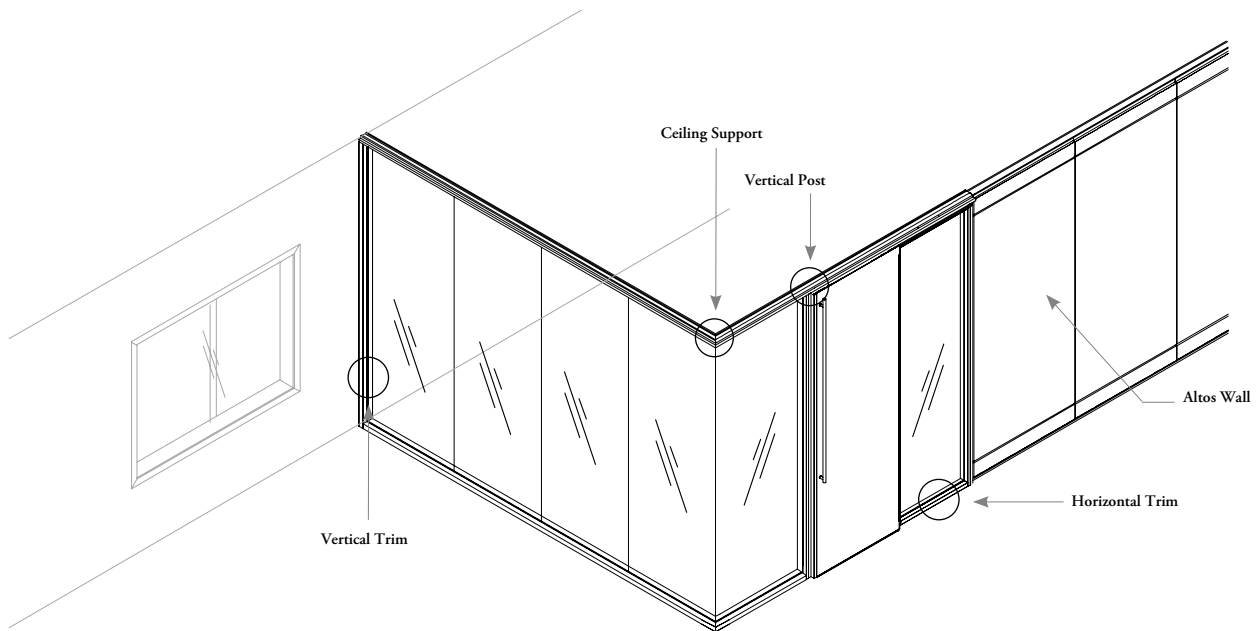


Vertical Post (FZFV/FXFV)

Used with other frame components and connections to provide vertical support.




Vertical Trim (FZFTV/FXFTV)

Provides a trim for the Vertical Post (FZFV) and Adjustable Wall Start (FZWS) for 10mm and Vertical Post (FXFV) and Adjustable Wall Start (FXWS) for 12mm.




Horizontal Trim (FZFT/FXFT)

Conceals the base frame and is cut to length on site.

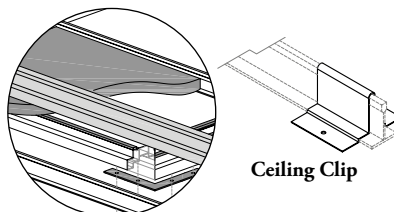


Ceiling Support (FZP/FXP)

To estimate quantities, allow for one Ceiling Clip per tile.



Filler Panel (FZFF/FXFF)

- It is used to fit around bulkheads or other architectural features intruding into the space
- Adjustable horizontal rails are provided, so that the width of the Filler Panel can be cut to custom sizes
- Maximum 6" from floor-to-ceiling can be cut away from the Filler Panel. Larger amounts can be cut away above and below the horizontal support













Wall End (FZFE)

A full-height trim used to finish an exposed "end of run".





planning with ceiling clips

The following should be considered when planning with Ceiling Clips.

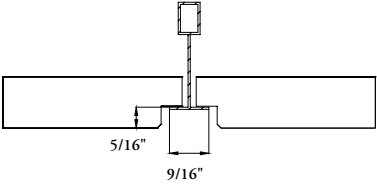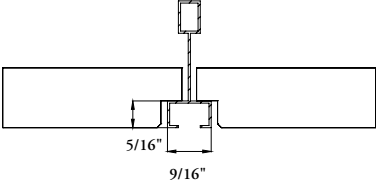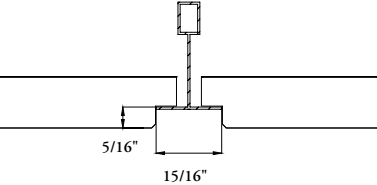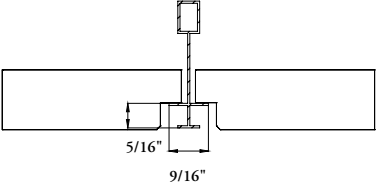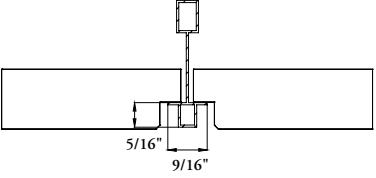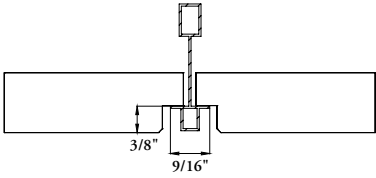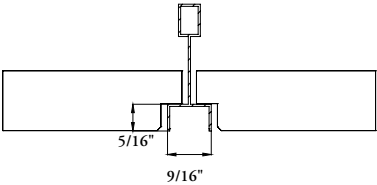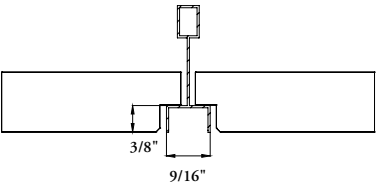Ceiling Profile	Ceiling Clip	Ceiling Profile	Ceiling Clip
	FXP6 / FZP6		FXP6 / FZP6
	FXP3 / FZP3		FXP6 / FZP6
	FXP2 / FZP2		FXP6 / FZP6
	FXP2 / FZP2		FXP4 / FZP4
	FXP6 / FZP6		FXP4 / FZP4

- Ceiling Clips with Reinforcement Ceiling Plank (FZP1/FXP1) is required for additional support above doors and at corners (Optos to Optos and Optos to Altos)
- Reinforcement Plank is 5' long


planning with ceiling clips (continued)

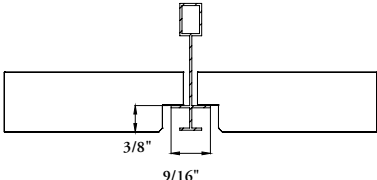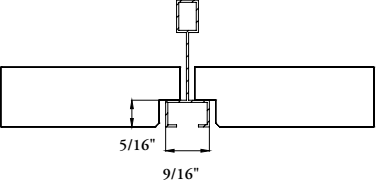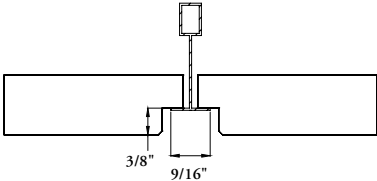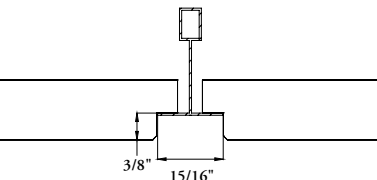Ceiling Profile	Ceiling Clip
	FXP4 / FZP4
	FXP4 / FZP4
	FXP5 / FZP5
	FXP5 / FZP5


- Ceiling Clips with Reinforcement Ceiling Plank (FZP1/FXP1) is required for additional support above doors and at corners (Optos to Optos and Optos to Altos)
- Reinforcement Plank is 5' long

planning with frames

The following outlines the features of Optos Frames.

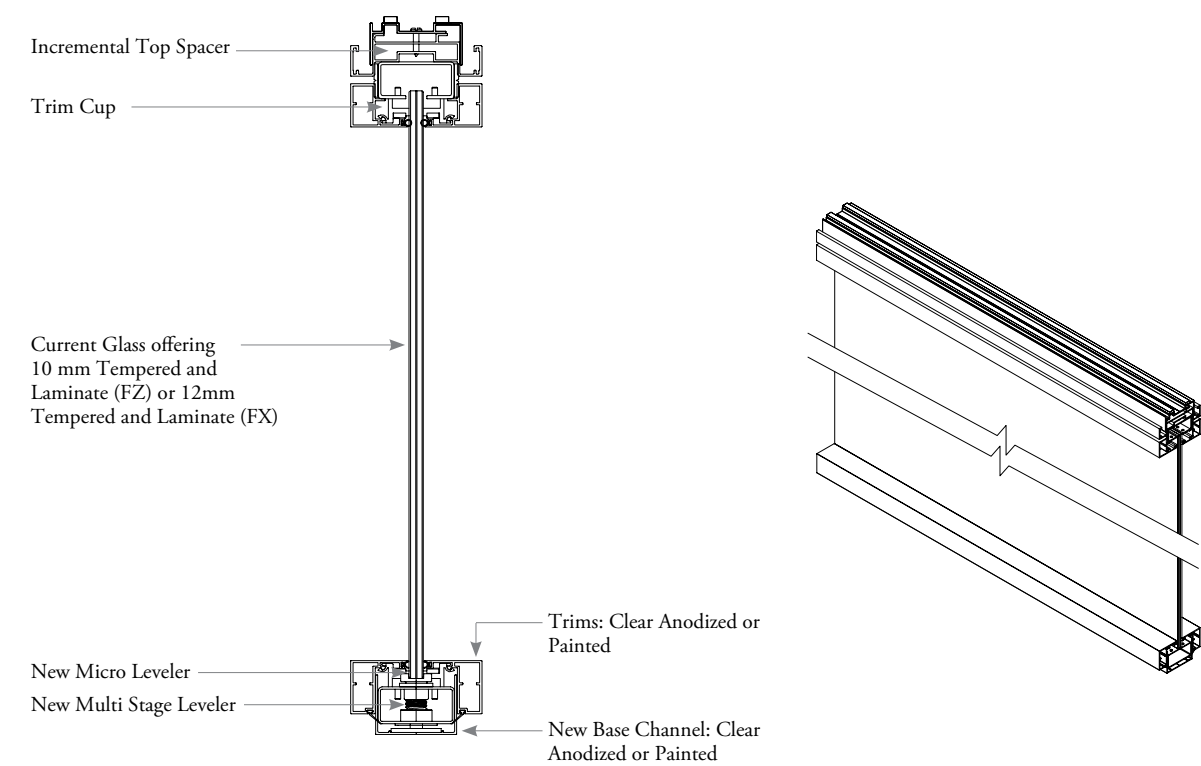


Section of Optos Profile at top and bottom

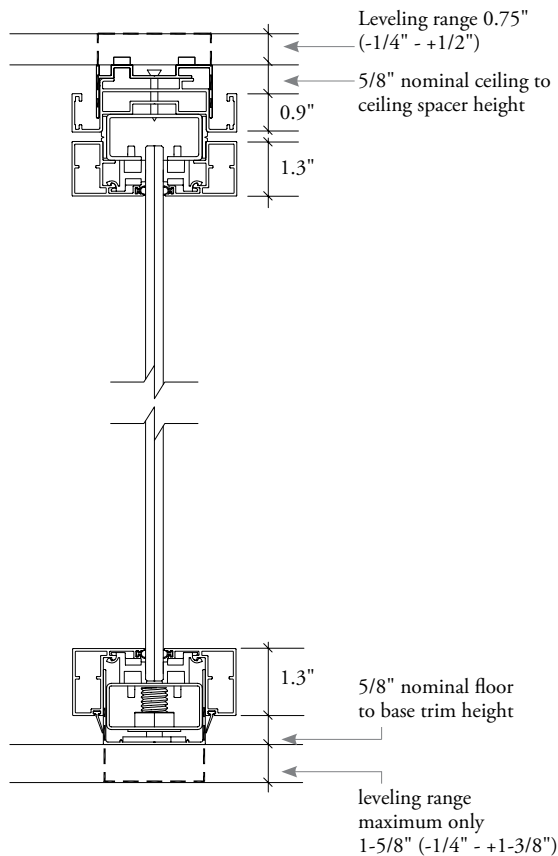

planning with frames (continued)

The following outlines the features of Optos Frames.

- Careful attention should be given to floor levels. Optos is complete with ceiling and floor leveling systems
- Whenever possible Doors should be planned near floor high spots to reduce gaps underneath

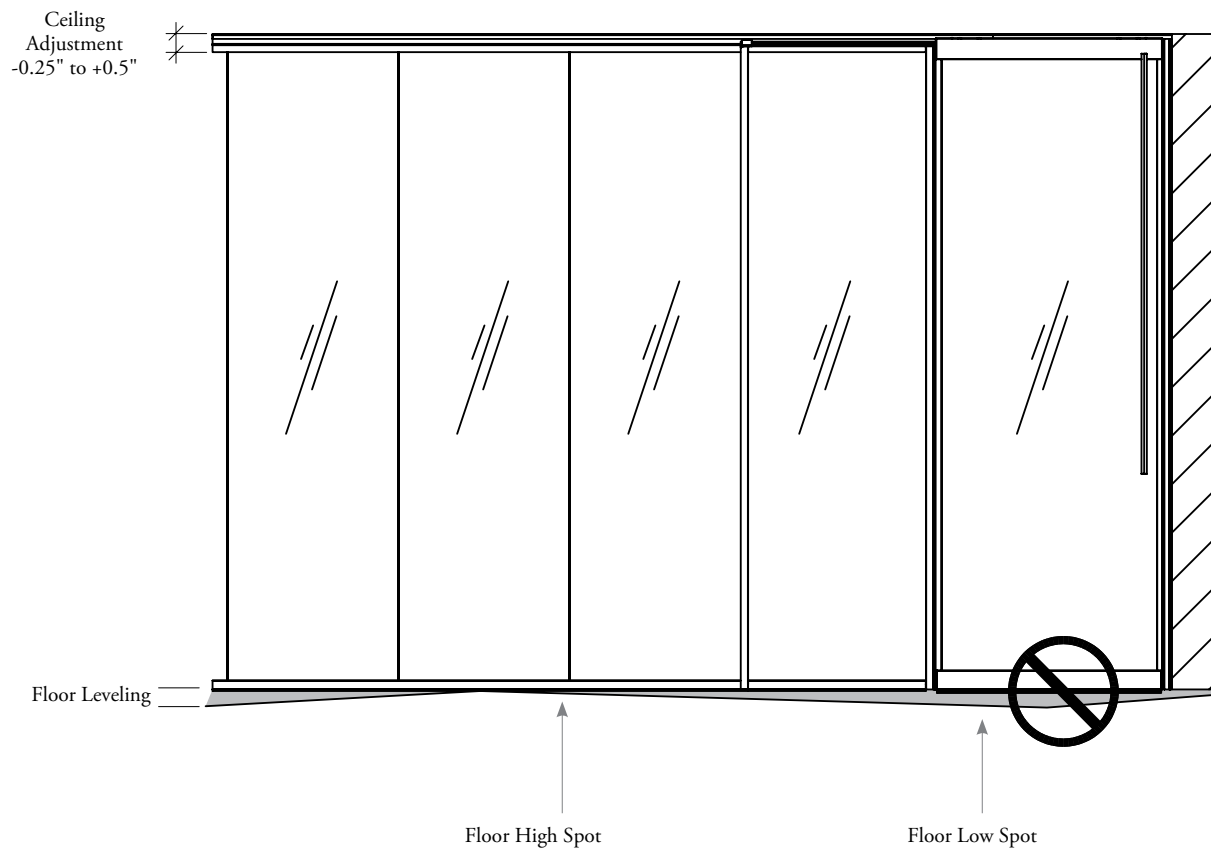


planning with frames (continued)


The following outlines the features of Optos Frames.

- Ceiling Top Spacer is adjustable
- If product is specified smaller or larger than minimum floor to ceiling height, Top Spacer may be adjusted to reduce gapping at base of product


ceiling leveling system

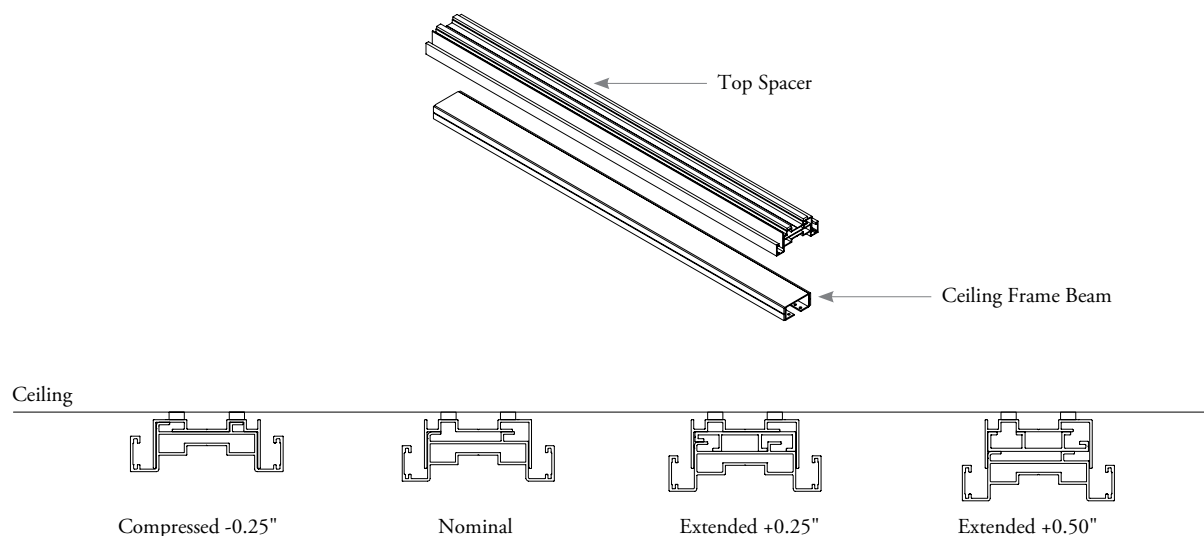

base leveling system

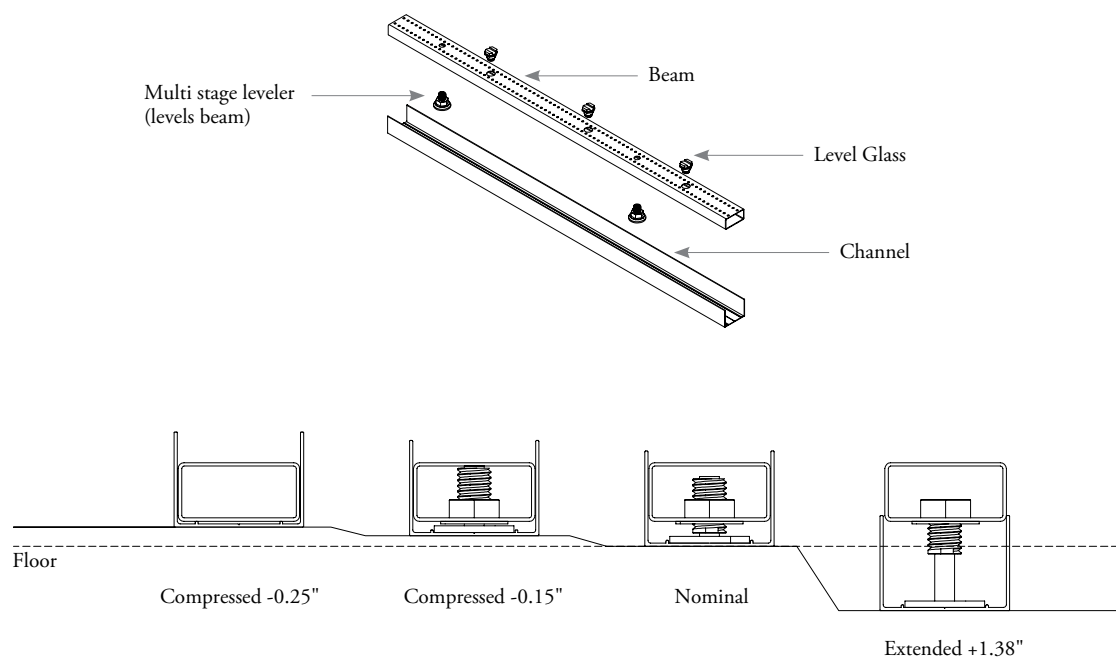


The following outlines the features of Optos Wall Starts.

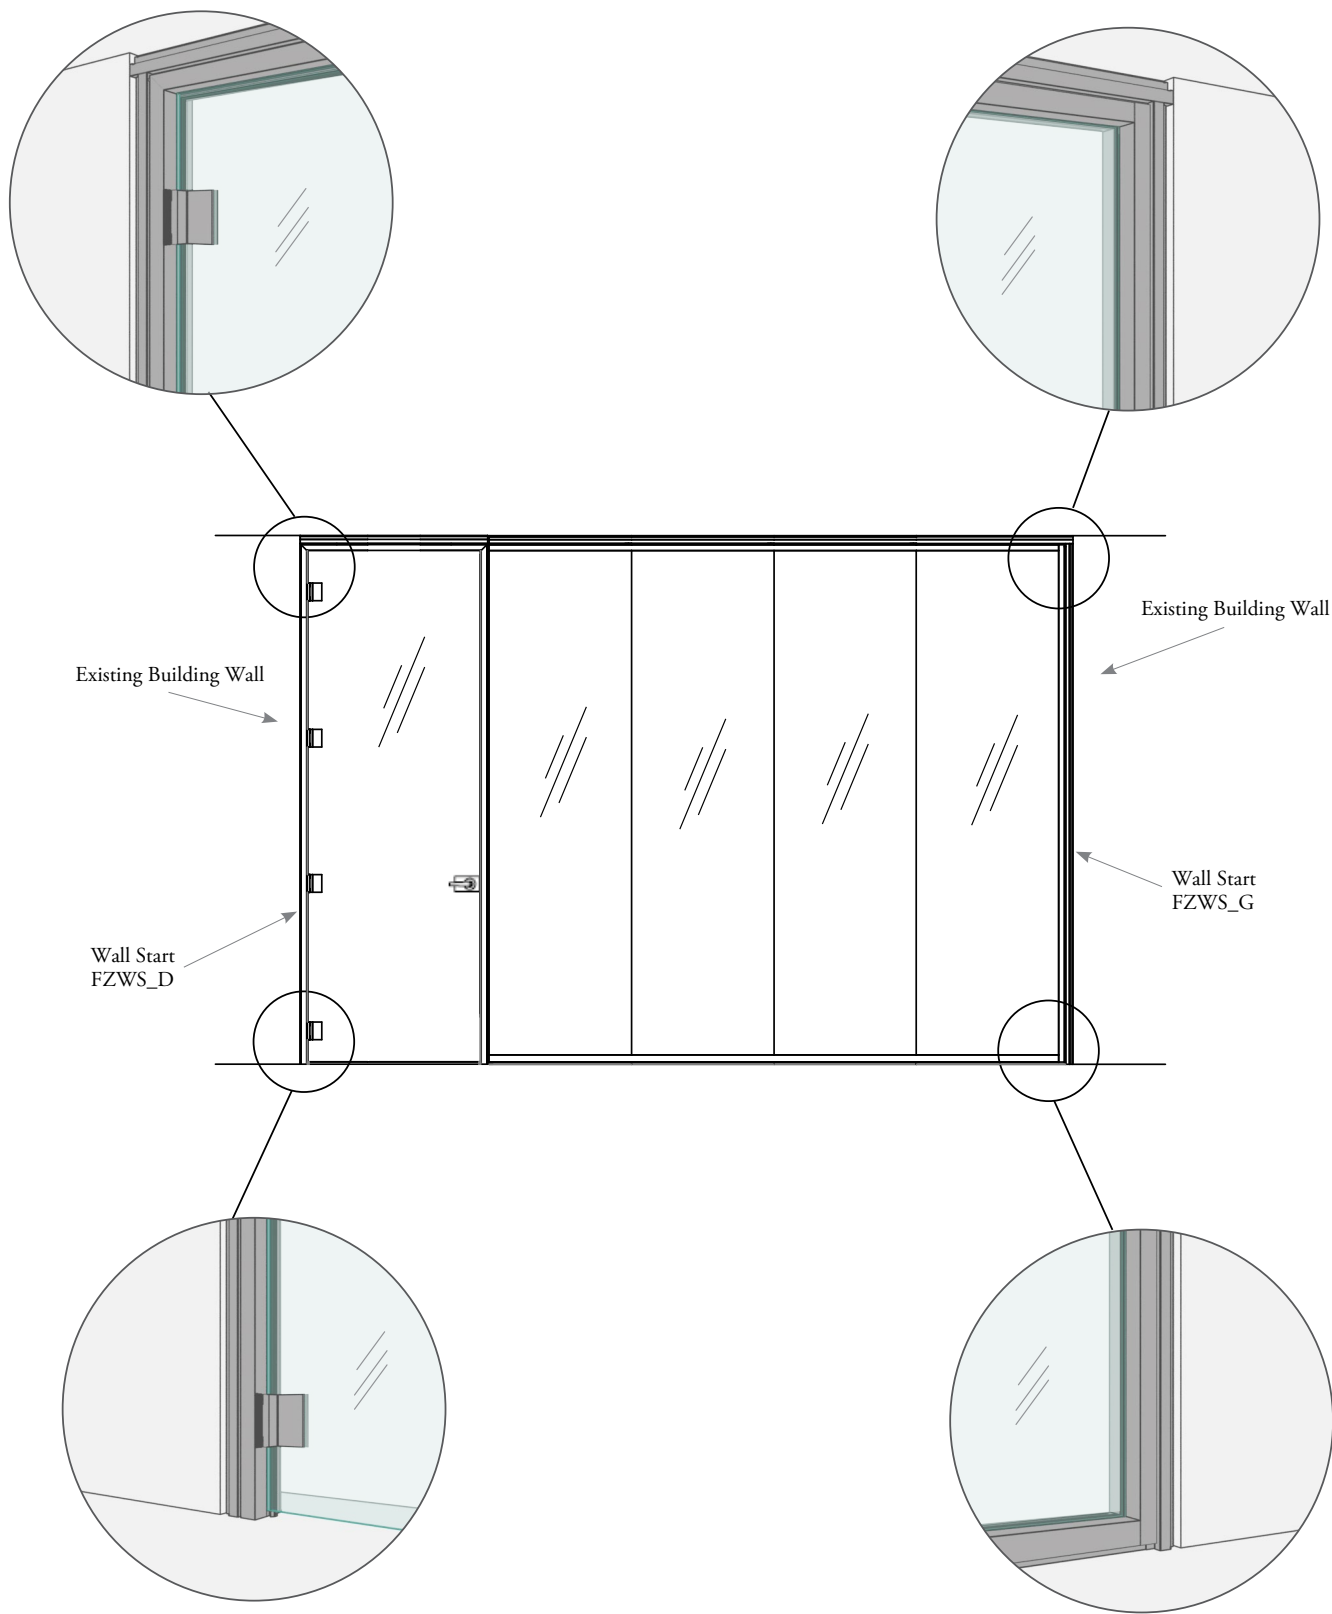

planning with trims

The following trim details are typical of Optos transitions.


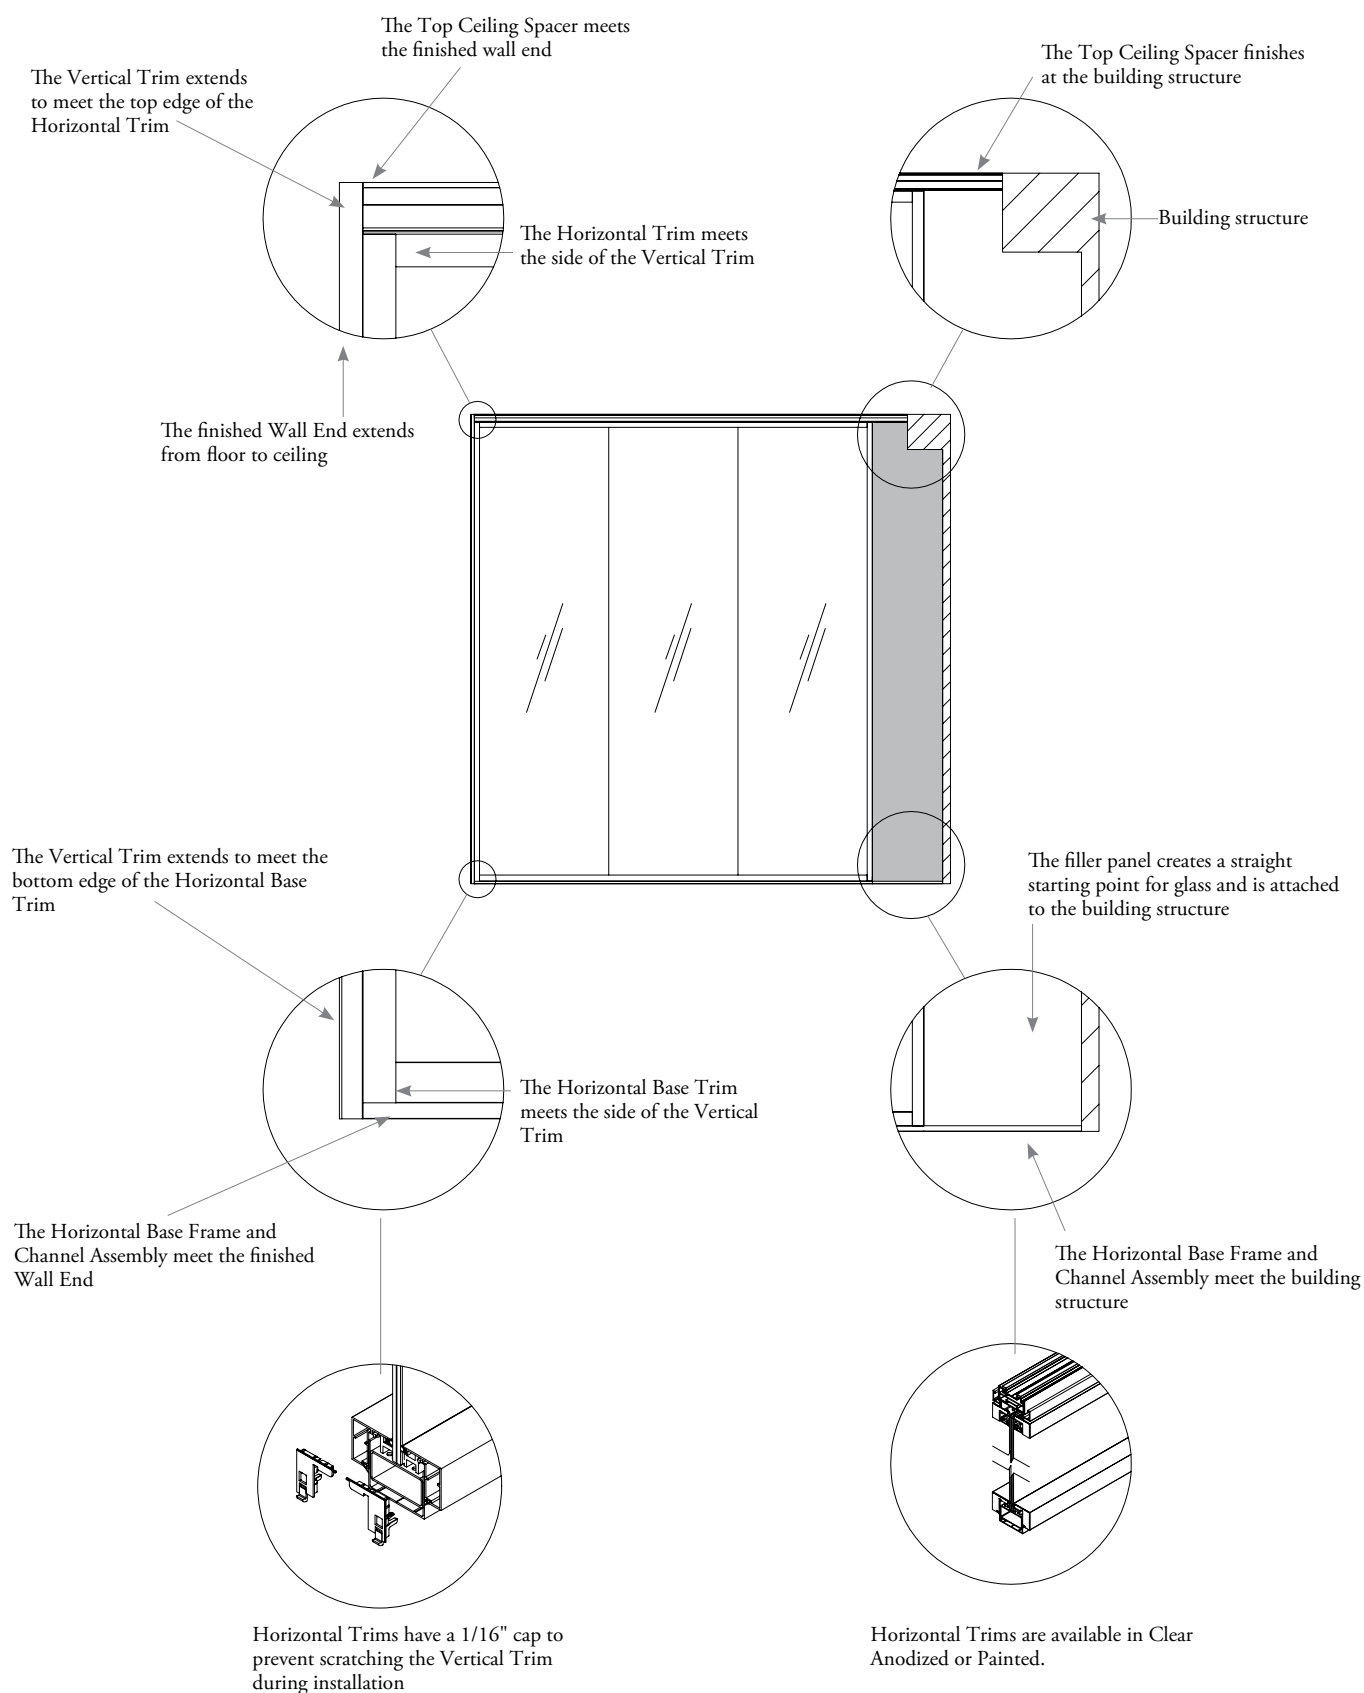


fascias –
10mm & 12mm

fascias – 10mm & 12mm


FASCIA BASICS.	53
PLANNING WITH GLASS MODULES	54
PLANNING WITH ELECTRICAL SIDE PANEL	55

Two Fascia types are available: the Glass Kit and the Electrical Side Panel.

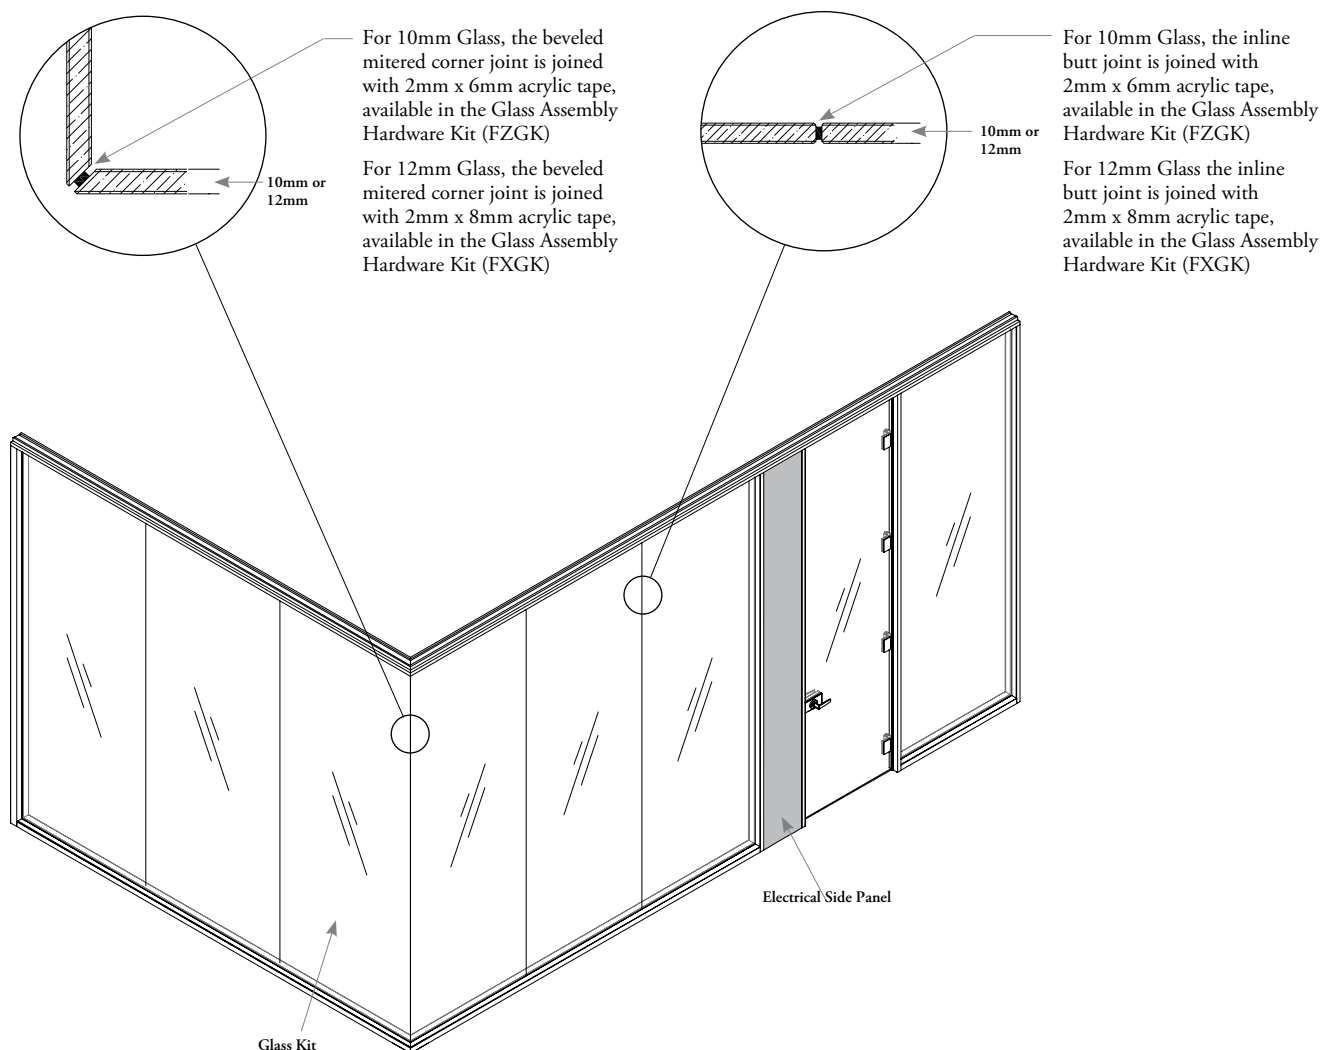

Glass Kit (FZGP/FXGP)

- Glass sections are aligned to create continuous glass spans
- Two types are available: Tempered and Laminated
- Vanceva Specialty Glass is available in 10mm Laminated Glass only
- Available edge types are: one mitered edge and one flat edge for 90° connections and two flat edges for inline connections
- 10mm available in 1/8" width increments from 14" - 36"
- 12mm available in 1/8" increments from 14" to 48"
- Textured Glass is not available





Electrical Side Panel (FZS/FXS)

- Two solid fascias used to house light switches or receptacle modules
- Available in two styles:
 1. Solid to be used for the light switch. The light switch location will be cut on site
 2. One vertical cut out at 18" high to be used for receptacles
- Available in Fascia Laminates or Flintwood



planning with glass modules

The following details should be taken into consideration when planning with Optos glass sections



A
Two-Way Connection



B
Three-Way Connection




C
Four-Way Connection




The acrylic tape adheres directly to face of opposing glass

The following types of corners are not possible:

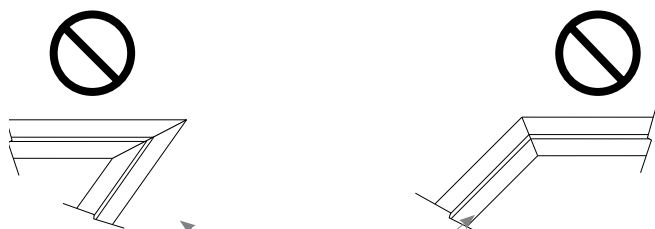

No angles other than 90° are possible with Optos




One piece of glass spanning two Two-Way 90° Corner Connection (FZCY2) is not possible


planning with electrical side panel

The following two conditions should be considered when incorporating the Electrical Side Panel.

- Electrical Side Panels (FZS/FXS) are used near door openings to house electrical switches and receptacles
- Due to interference, the Electrical Side Panel must be used under a Ceiling Frame Beam and not under spans of Optos where a sliding Door Rail has been used. The panel should therefore be planned on the side adjacent to a sliding Door where the rail is not used

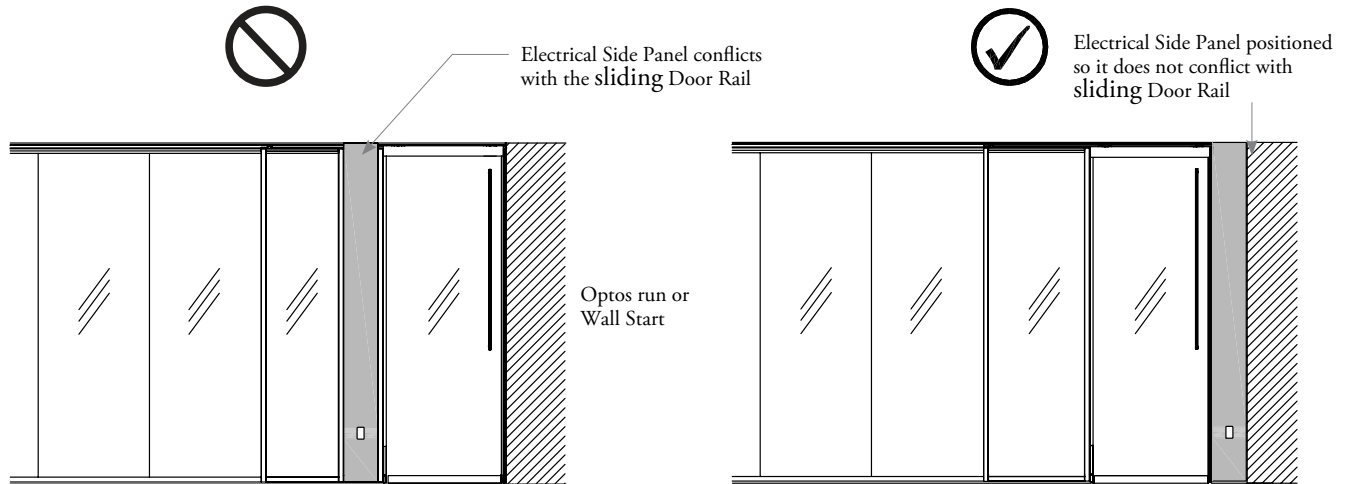

It is advisable to avoid the use of an Electrical Side Panel (FZS/FXS) at an in-line Optos to Altos transition. Instead use Altos which has cable routing capabilities.

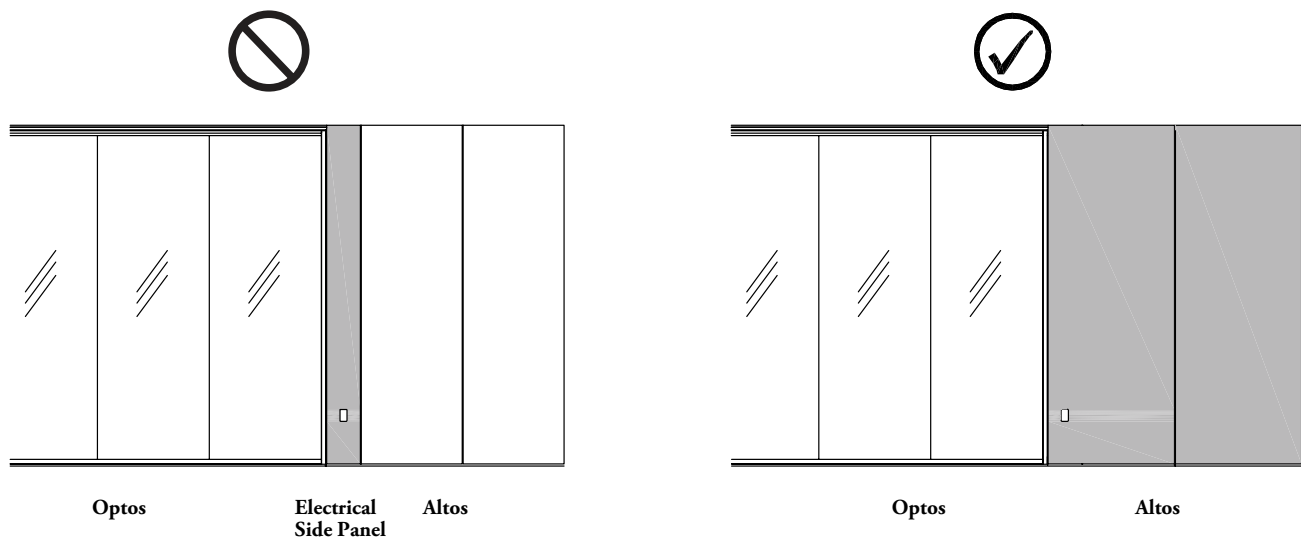

doors

doors




DOOR OVERVIEW	59
BUILDING UP A COMPLETE DOOR MODULE	60
SWING DOOR BASICS	61
SLIDING DOOR BASICS	63
HINGED DOOR DETAILS	64
PIVOT DOOR DETAILS	66
SLIDING DOOR DETAILS	68
JAMB BASICS	70
RAIL BASICS	71
PLANNING WITH JAMBS & RAILS	72
PLANNING WITH DOORS	73
PLANNING WITH SWING DOORS & FRAMES	74
PLANNING WITH DOUBLE GLAZED SWING DOORS	77
PLANNING WITH DOOR STOPS	79
PLANNING WITH SINGLE SLIDING DOORS	80
PLANNING WITH DOUBLE SLIDING DOORS	83
HANDLE BASICS	87
LEVER DETAILS	88
PULL DETAILS	89
HANDLE COMPATIBILITY	91

door overview

Optos offers a variety of doors that meet a range of privacy and functional needs – the three basic types are: Hinged, Pivot and Sliding


- Some doors are available in glass, solid, and solid with glass insert options. Both as Single leaf or double leaf doors
- Door leaves, Jambs and Rail Kits are necessary to complete a full door package
- Consideration for ADA compliant locking hardware for doors needs to be determined early in the project cycle. Teknion offers a custom special solution that complies with ADA requirements, subject to local approvals
- Check local regulatory codes for minimum clear height allowed for door openings
- Check local code requirements, as in some jurisdictions the use of Sliding Doors limits room occupancy to a maximum of 10 people
- Locking or non-locking is available

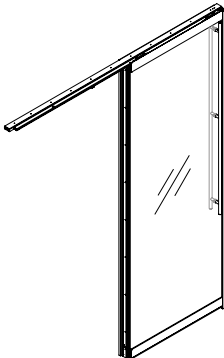


Swing Doors		Sliding Doors
Pivot Doors	Hinged Doors	
		

building up a complete door module


- Door leaves, Jamb Kits, Rails (for Sliding doors only) and Handles need to be specified to create a complete door module
- Fascias and clerestory adjacent doors need to be specified separately

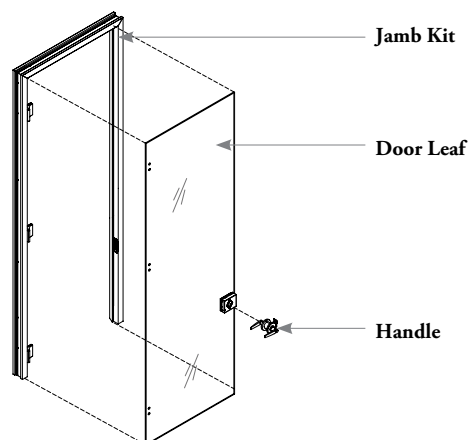

Complete Hinged Door Package = Door Leaf + Jamb Kit + Handle

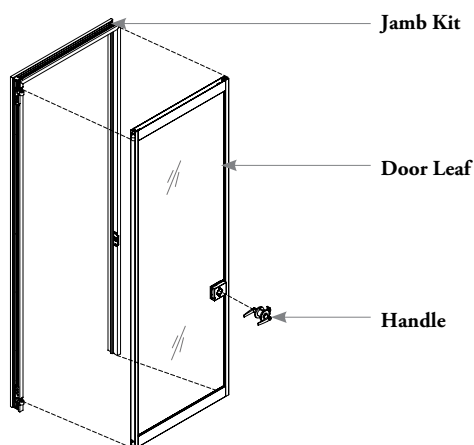


Complete Pivot Door Package = Door Leaf + Jamb Kit + Handle

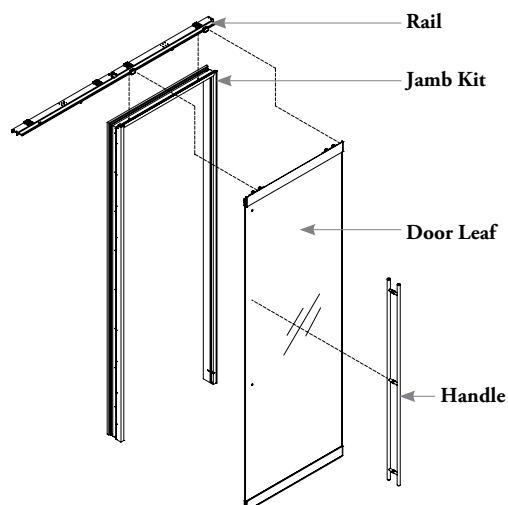

Complete Sliding Door Package = Door Leaf + Jamb Kit + Rail Kit + Handle

hinged swing door basics


Three hinged swing door styles are available for Optos applications.



Glass Hinged Door Leaf Single (FZSGHL)

- A full-height hinged glass door that swings open
- 10mm thick (3/8" nominal thickness) glass leaf
- Available in 40" and 42" nominal widths
- Optional 10" high stainless steel kickplate (ADA)
- Glass Type: Tempered or Tempered-Laminated
- Glass Finish: Clear, Frosted, or Low Iron
- Magnetic Catch to be used when ordered with floor, ceiling and linear pull handles
- Frame Component Finishes: Clear Anodized or Painted
- Includes Door Stop
- Hinges open up to 180° (actual 176° with door stop).


Door Nominal Width	Door and Doorway Clear Width when Door Opened 180°	Door and Doorway Clear Width when Door Opened 90°
40"	36"	34-1/4"
42"	38"	36-1/4"



Solid Hinged Door Leaf with Glass Insert Single (FZSNHL) Solid Hinged Door Leaf Single (FZSSHL)

- A full-height hinged solid door that swings open
- 1-3/4" thick solid leaf
- Available in 40" and 42" nominal widths
- Optional Bottom Seal
- Magnetic Catch standard when using floor, ceiling and linear pull handles
- Solid Finishes: Unfinished, Laminate or Flintwood
- Component Finishes: Clear Anodized or Painted
- Includes Door Stop
- Hinges open up to 180° (actual 176° with door stop)

Door Nominal Width	Door and Doorway Clear Width when Door Opened 180°	Door and Doorway Clear Width when Door Opened 90°
40"	36-1/4"	34-1/2"
42"	38-1/4"	36-1/2"




Glass Hinged Door Leaf Double (FZDGHL)

- Two full-height hinged glass doors that swing open
- 10mm thick (3/8" nominal thickness) glass double leaf
- Available in 72" and 80" nominal widths
- Optional 10" high stainless steel kickplate (ADA)
- Glass Type: Tempered or Tempered-Laminated
- Glass Finish: Clear, Frosted, or Low Iron
- Frame Component Finishes: Clear Anodized or Painted
- Includes two Door Stops
- Hinges open up 180°

Door Nominal Width	Door and Doorway Clear Width when Double Door Opened 180°	Door and Doorway Clear Width when Active Door Opened 180°	Door and Doorway Clear Width when Double Door Opened 90°	Door and Doorway Clear Width when Active Door Opened 90°
72"	68"	33-1/2"	64-3/8"	33-3/4"
80"	76"	37-1/2"	72-3/8"	35-3/4"

pivot swing door basics


Two pivot swing door styles are available for Optos applications.



Glass Pivot Door Leaf Single (FZSGPL)

- A full-height door that pivots open 180°
- 10mm thick (3/8" nominal thickness) and 12mm thick glass leaf
- Available in 40" and 42" nominal widths
- Optional 10" high stainless steel kickplate (ADA)
- Optional adjustable door closer/door stay
- Glass Type: Tempered or Tempered-Laminated
- Glass Finish: Clear, Frosted, or Low Iron
- Frame Component Finishes: Clear Anodized or Painted
- Magnetic Catch standard when using floor, ceiling and linear pull handles
- Door can be specified with closer or magnetic catch, not both

Door Nominal Width	Door and Doorway Clear Width when Door Opened 180°	Door and Doorway Clear Width when Door Opened 90°
40"	36-1/4"	35-1/2"
42"	38-1/4"	37-1/2"




Framed 45mm Double Glazed Pivot Door Leaf, Single (FZCL)

- A full-height door that pivots open 180° (100° with closer)
- 2 x 6mm thick (1/4" nominal thickness) glass leaf
- Available in 40" and 42" nominal widths
- ADA compliant
- Optional adjustable door closer/door stay
- Glass Type: Tempered or Laminated
- Glass Finish: Clear, Frost, Cool White, Polar White or Low Iron
- Frame Component Finishes: Clear Anodized or Painted
- Door Stop

Door Nominal Width	Door and Doorway Clear Width when Door Opened 180°	Door and Doorway Clear Width when Door Opened 90°
40"	35-3/4"	34"
42"	37-3/4"	36"


Four sliding door styles are available for Optos applications

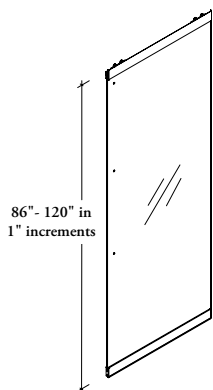

Glass Sliding Door Leaf Single (FZSGSL)

- A full-height glass door that slides open
- 10mm thick (3/8" nominal thickness) glass leaf
- Available in 40" 42" and 44" nominal widths
- Door Application: Interior and Exterior
- Door Slide: Left or Right
- Glass Type: Tempered or Tempered-Laminated
- Glass Finish: Clear, Frosted, or Low Iron
- Header and Base Cover Finish: Clear Anodized or Painted
- Soft Close / Open Mechanism Standard


Door Nominal Width	Door Clear Width Opening
40"	32-1/16"
42"	34-1/16"
44"	36-1/16"

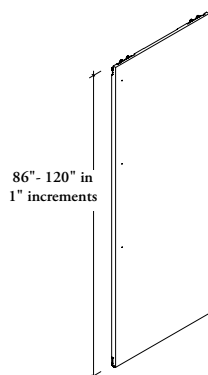

Solid Sliding Door Leaf Single (FZSSSL)

- A full-height solid door that slides open
- 1-3/4" thick solid leaf
- Available in 40", 42" and 44" nominal widths
- Door Application: Interior and Exterior
- Door Slide: Left or Right
- Solid Finishes: Laminate or Flintwood
- Header and Base Cover Finish: Clear Anodized or Painted
- Soft Close / Open Mechanism Standard


Door Nominal Width	Door Clear Width Opening
40"	32-1/16"
42"	34-1/16"
44"	36-1/16"

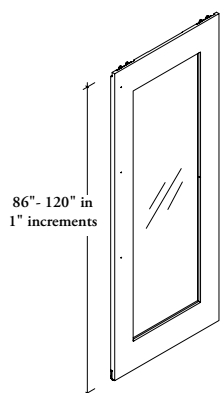

Solid Sliding Door Leaf with Glass Insert Single (FZSNSL)

- 1-3/4" thick solid leaf with 10mm thick glass insert
- Available in 40", 42" and 44" nominal widths
- Door Application: Interior and Exterior
- Door Slide: Left or Right
- Solid Finishes: Laminate or Flintwood
- Glass Type: Tempered or Laminated
- Glass Finish: Clear, Frosted, or Low Iron
- Header and Base Cover Finish: Clear Anodized or Painted
- Soft Close / Open Mechanism Standard

Door Nominal Width	Door Clear Width Opening
40"	32-1/16"
42"	34-1/16"
44"	36-1/16"

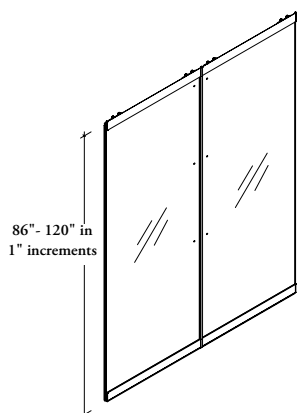

Glass Sliding Door Leaf Double (FZDGSL)



- Two full-height glass doors that slide open
- 10mm thick (3/8" nominal thickness) glass double leaf
- Available in 70", 72", 78" and 80" nominal widths
- Door Application: Interior and Exterior
- Glass Type: Tempered or Tempered-Laminated
- Glass Finish: Clear, Frosted, or Low Iron
- Header and Base Cover Finish: Clear Anodized or Painted
- Soft Close / Open Mechanism Standard

Door Nominal Width	Both Doors Clear Width Opening	Active Door Clear Width Opening
70"	56-1/2"	28-1/8"
72"	58-1/2"	29-1/8"
78"	64-1/2"	32-1/8"
80"	66-1/2"	33-1/8"


hinged door details

The following outlines the features of hinged doors.


single hinged door

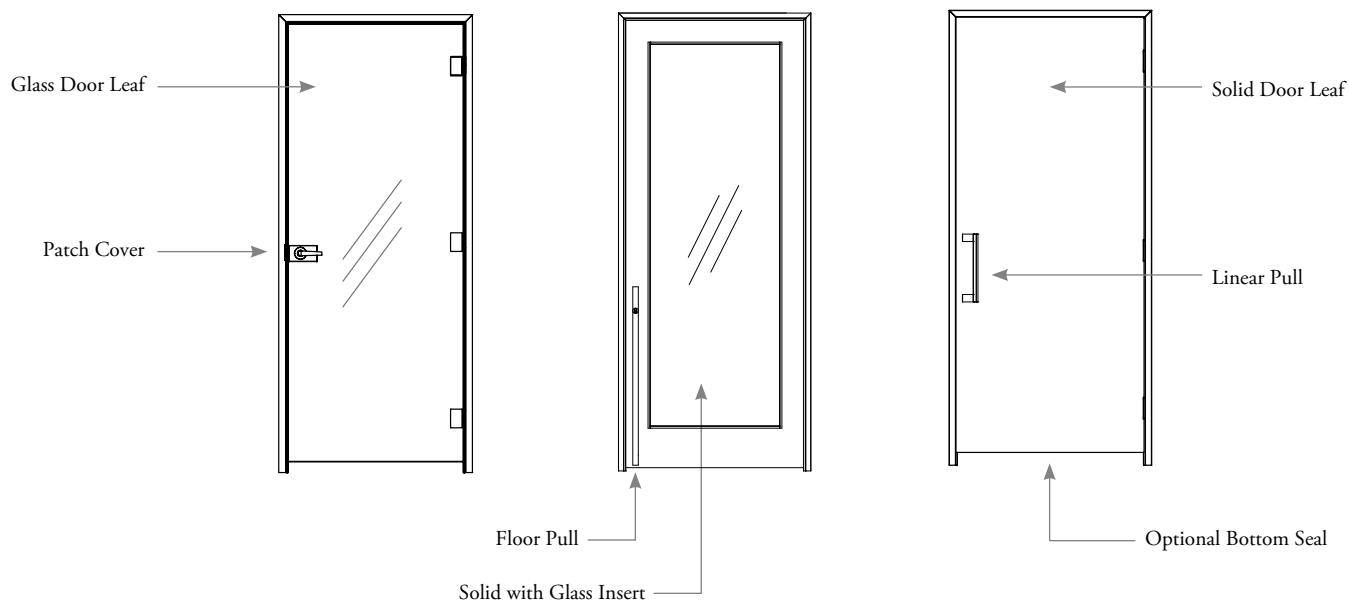

Glass Door Hinge




Solid Door Hinge



Bottom Seal (Solid door only)


An Auto Bottom Seal is an option to minimize sound leakage at the bottom of solid doors (up to 0.5" gap under door).

- Optional (Solid door only)



Stainless Steel Kickplate (Glass door only)

- Optional
- 10" high stainless steel (ADA)



Magnetic Catch

Magnetic catch offers the experience of a latch on select swing doors using floor and ceiling pulls.



- Select doors when using floor, ceiling and linear pull handles

hinged door details (continued)


The following outlines the features of hinged doors.

double hinged door

The double hinged door has a patch lock assembly at the top of the left door.

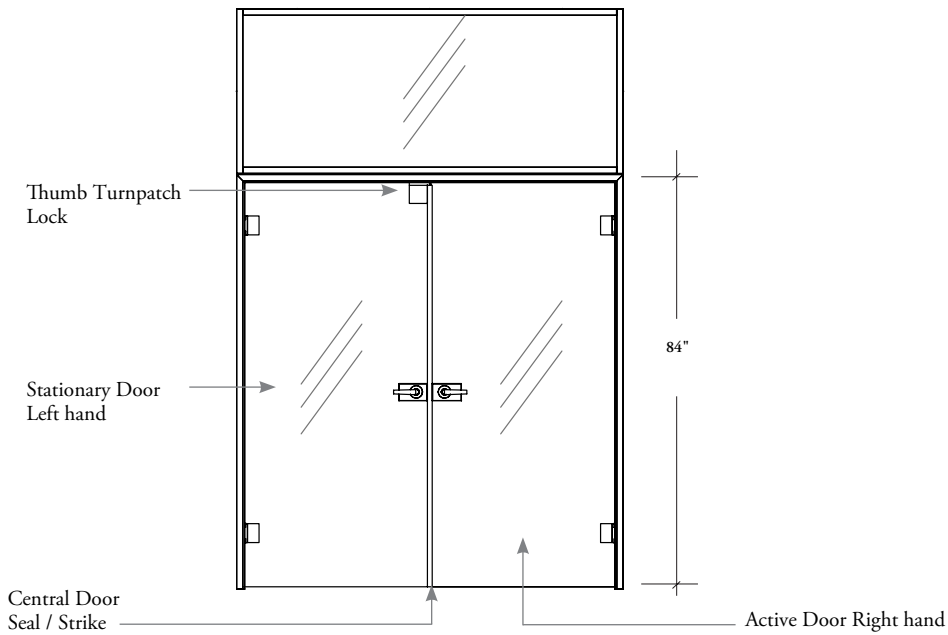

Glass Door Hinge





Stainless Steel Kickplate

- Optional
- 10" high stainless steel (ADA)

pivot door details


The following outlines the features of pivot doors.

single pivot door

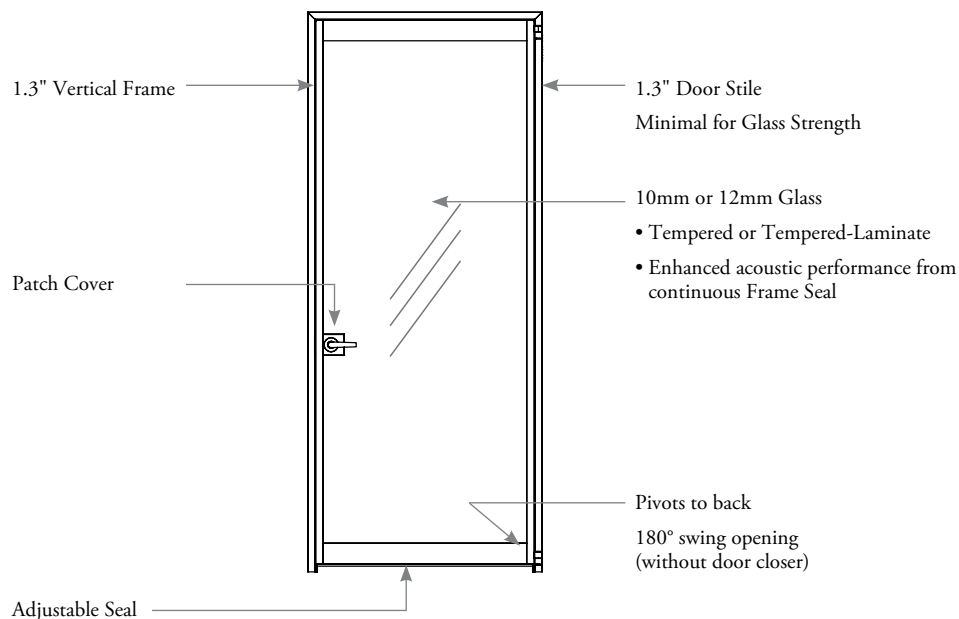


Adjustable Brush Seal

- Range accommodates base leveling -1/4" - +1-3/8"
- Continuous across width of door




Pivot Hinge (interior view)

- Door pivots hung from vertical
- Door levels with vertically with system
- Two pivots only up to maximum 10'
- Anodized or Painted Aluminum finish




Lock Patch Plate

- Anodized Aluminum or Painted finish
- No exposed fasteners



Optional adjustable door closer / door stay

- Dorma concealed closer
- Adjustable closing speed
- Closer Arm and track finished in Gray or Black
- Hold Open feature is included with the Closer Mechanism
- Maximum 100° opening range
- Can not be specified with magnetic catch



Magnetic Catch



Magnetic catch offers the experience of a latch on select swing doors using floor and ceiling pulls.

- Select doors when using floor, ceiling and linear pull handles
- Can not be specified with door closer / door stay

pivot door details (continued)


The following outlines the features of the single leaf double glazed pivot door.

single pivot door - double glazed

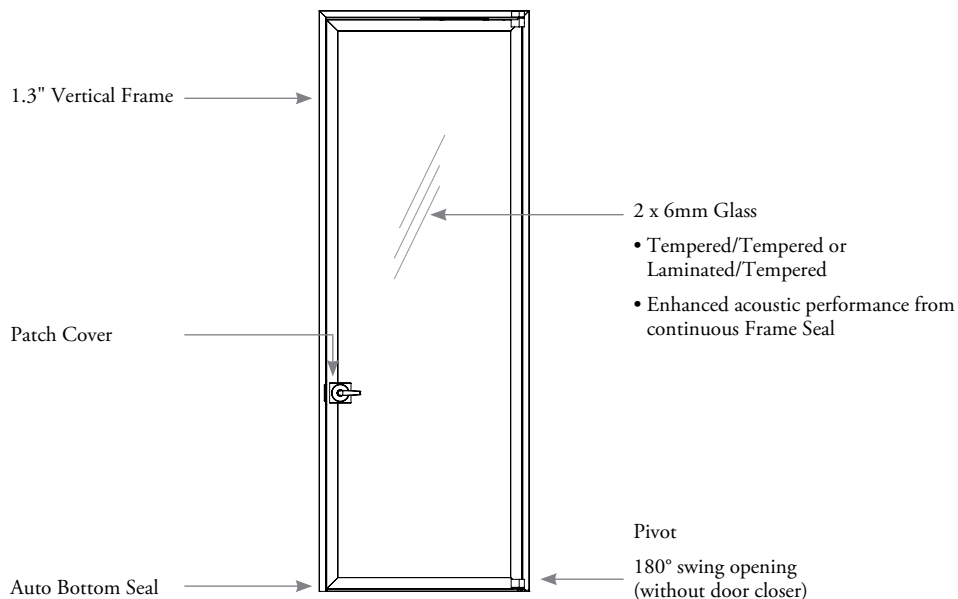


Auto Bottom Seal

- Actuator pin drops seal when door is closed against jamb and allows for additional acoustics
- Maximum drop of 7/8" (22mm)
- Casing finished in Clear Anodized only




Pivot Hinge

- One pivot on top of door and one on bottom
- Finished to match frame: Anodized or Painted Aluminum
- Lateral adjustment +/- 0.09" on top and bottom pivots



Patch Plate

- Anodized Aluminum or Painted
- No exposed fasteners








Door closer/hold open (optional)

- Concealed closer
- Adjustable closing speed
- Closer arm finish in Clear Anodized or Black
- Hold Open feature is included with the Closer Mechanism
- Maximum 100° opening range
- Optional for ALX and L series hardware. Always included for all other hardware types.

sliding door details


The following outlines the features of sliding doors.

single sliding door

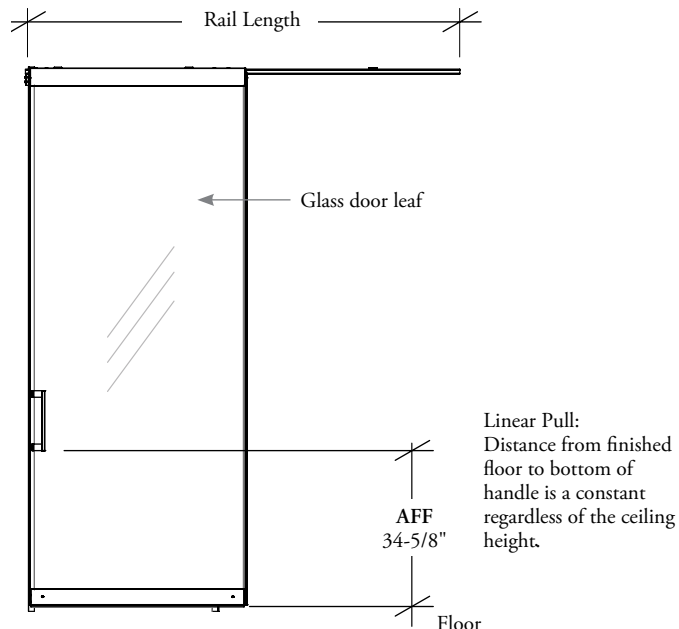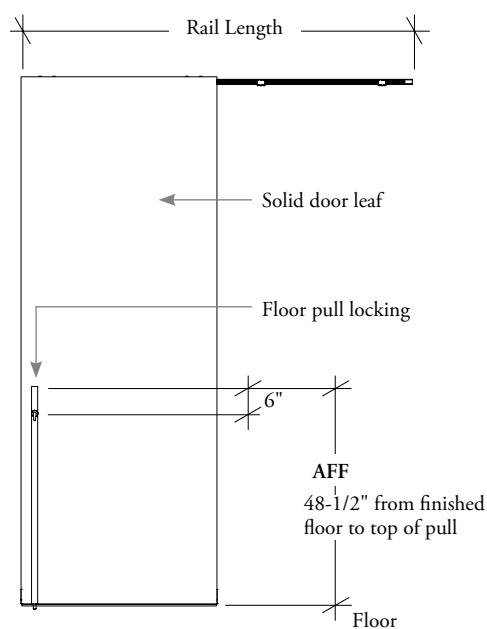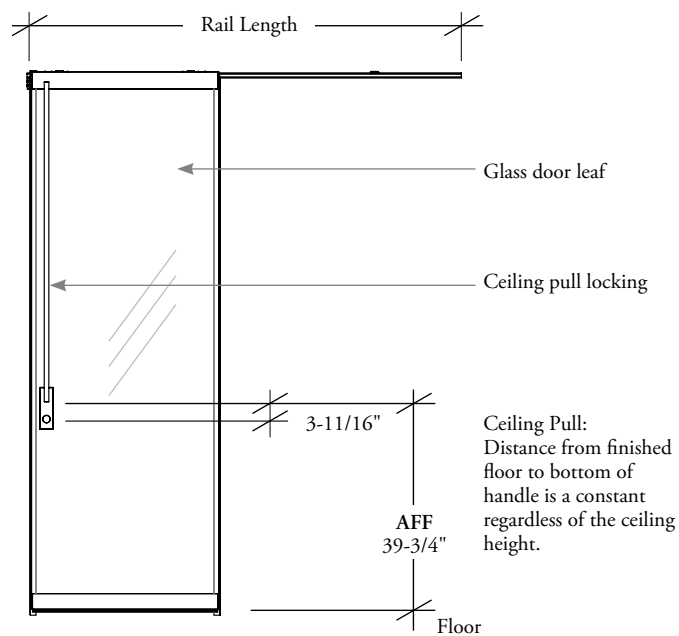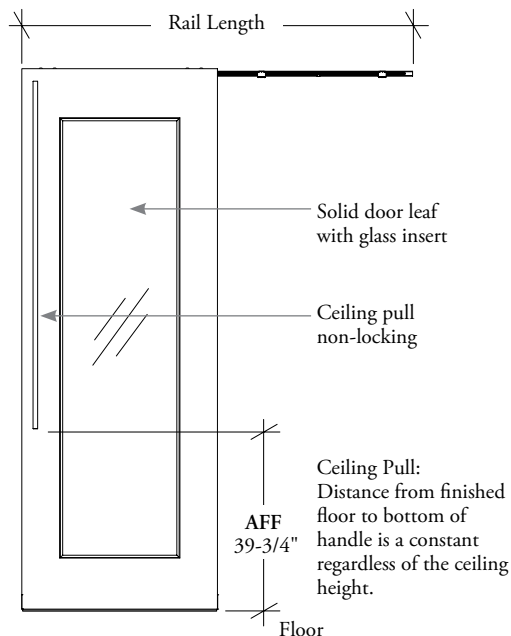

Door Stopper

- Stopper with gasket
- Captures the door when closed providing a good acoustic seal





Soft Open/Close

- Included in all sliding doors as standard
- Integrated on door header

sliding door details (continued)


The following outlines the features of sliding doors.

double sliding door

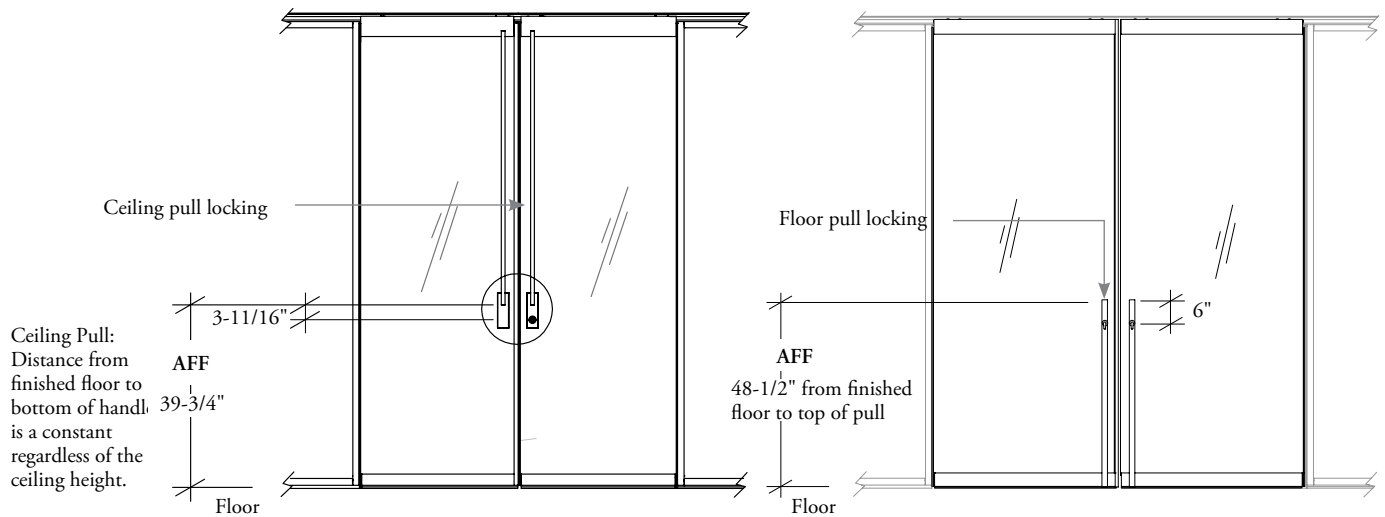

Door Receiver

- Stopper with gasket
- Captures the door when closed providing a good acoustic seal and protection from glass edge



Soft Open/Close

- Included in all sliding doors as standard
- Integrated on door header


jamb basics

Jambs are independent frames that cover the vertical and horizontal structural elements in a door assembly.




Solid Hinged Door Jamb Kit Single (FZSSHF)

- Jamb for the Solid Hinged Door Leaf Single (FZSSHL) and Solid with Glass Insert Door Leaf (FZSNHL)
- Jamb Kit consists of jamb frame, connection hardware (including hinges), adjustable strike plate, 1 door stop
- Available in 40" and 42" nominal widths
- Available in 86" to 120" nominal heights in 1" increments
- Frame Component Finishes: Clear Anodized or Painted




Glass Hinged Door Jamb Kit Single (FZSGHF)

- Jamb for the Glass Hinged Door Leaf Single (FZSGHL)
- Jamb Kit consists of jamb frame, connection hardware (including hinges), adjustable strike plate, 1 door stop
- Available in 40" and 42" nominal widths
- Available in 86" to 120" nominal heights in 1" increments
- Frame Component Finishes: Clear Anodized or Painted

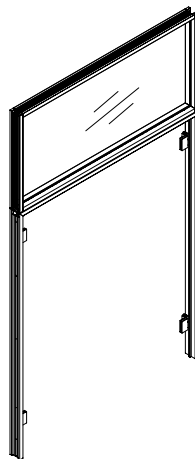

Glass Hinged Door Jamb Kit Double (FZDGHF)

- Jamb for the Glass Hinged Door Leaf Double (FZDGH)
- Jamb Kit consists of jamb frame, Vertical and Horizontal frame for the Clerestory, connection hardware (including hinges), flush bolt, adjustable strike plate, patch lock, 2 door stops, 1 closer (if specified)
- Available in 72" and 80" nominal widths
- Available in 94" to 120" nominal heights in 1" increments
- Frame Component Finishes: Clear Anodized or Painted




Glass Pivot Door Jamb Kit Single (FZSGPF)

- Jamb for the Glass Pivot Door Leaf Single (FZSGPL)
- Jamb Kit consists of jamb frame, connection hardware, adjustable strike plate, 1 door stop, 1 closer (if specified)
- Available in 40" and 42" nominal widths
- Available in 86" to 120" nominal heights in 1" increments
- Frame Component Finishes: Clear Anodized or Painted




45mm Glass Pivot Door Jamb Kit Single (FZCJ)

- Jamb for 45mm Glass Pivot Door Leaf Single (FZCL)
- Jamb Kit consists of jamb frame, connection hardware, adjustable strike plate, 1 door stop, 1 closer (if specified)
- Available in 40" and 42" nominal widths
- Available in 86" to 120" nominal heights in 1" increments
- Frame Component Finishes: Clear Anodized or Painted




Glass Sliding Door Jamb Kit Single (FZSGSJ)

- Jamb for the Glass Sliding Door Leaf Single (FZSGSL)
- Jamb Kit consists of jamb frame
- Available in 40", 42" and 44" nominal widths
- Available in 86" to 120" nominal heights in 1" increments
- Door Application: Interior and Exterior
- Door Slide: Left or Right
- Header and Base Cover Finish: Clear Anodized or Painted



Solid Sliding Door Jamb Kit Single (FZSSSJ)


- Jamb for the Solid Sliding Door Leaf Single (FZSSSL) and the Solid Sliding Door Leaf with Glass Insert Single (FZSNSL)
- Jamb Kit consists of jamb frame
- Available in 40", 42" and 44" nominal widths
- Available in 86" to 120" nominal heights in 1" increments
- Door Application: Interior and Exterior
- Door Slide: Left or Right
- Header and Base Cover Finish: Clear Anodized or Painted

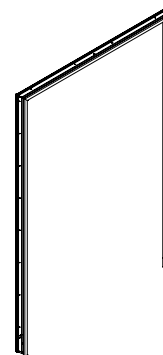

Glass Sliding Door Jamb Kit Double (FZDGSJ)


- Jamb for the Glass Sliding Door Leaf Double (FZDGSL)
- Jamb Kit consists of jamb frame
- Available in 70", 72", 78" and 80" nominal widths
- Available in 86" to 120" nominal heights in 1" increments
- Door Application: Interior and Exterior
- Header and Base Cover Finish: Clear Anodized or Painted

Rails are independent frames that are necessary for sliding doors to open and close.

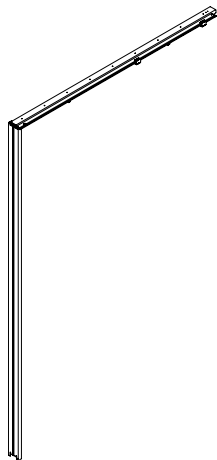


Sliding Door Fixed Rail Single (FZSFSR)

- Rail for all the sliding door leaves single: Glass (FZSGSL), Solid (FZSSSL), and Solid with Glass Insert (FZSNSL)
- Provides a vertical mullion visual on the glass fascia adjacent to the sliding door
- Includes one vertical aluminum post to be used at a fixed distance from the door

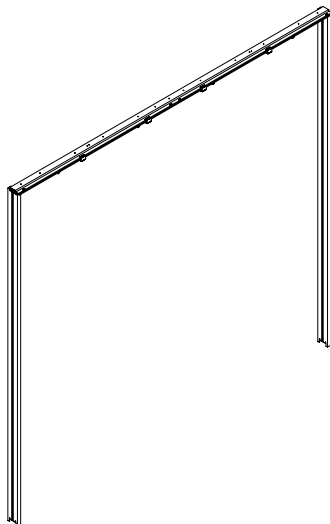


Sliding Door Fixed Rail Double (FZDFSFR)

- Rail for the Glass Sliding Door Leaf Double (FZDGSL)
- Provides two vertical mullion visual on the glass fascias adjacent to the sliding door
- Includes two vertical aluminum posts to be used at a fixed distance from the door

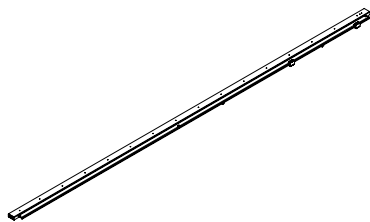

Sliding Door Extended Rail Single (FZSESR)

- Rail for all the sliding door leaves single: Glass (FZSGSL), Solid (FZSSSL), and Solid with Glass Insert (FZSNSL)
- Rail lengths are available from 75" to 144" in 1/8" increments
- Provides a storefront so that a continuous wall of glass can be created without mullions beside the door
- Needs to be used when a connection is required at the end of the rail. Can be used with a wall start, in line connection, two way connection, three way connection, Altos connection, Clerestory connection



Sliding Door Extended Rail Double (FZDESR)

- Rail for the Glass Sliding Door Leaf Double (FZDGSL)
- Provides a storefront so that a continuous wall of glass can be created without mullions beside the door
- Needs to be used when a connection is required at the end of the rail. Can be used with a wall start, in line connection, two way connection, three way connection, Altos connection, Clerestory connection

planning with jambs and rails

The following chart outlines which door leaf /jamb/rail combinations are possible.

Hinged Door			
	Leaf	Jamb	Handle
Single	FZSGHL	FZSGHF	FZHSX FZSCP FZSFP FZSLP
	FZSSHL FZSNHL	FZSSHF	FZHSX FZHSL FZSCP FZSFP FZSLP
Double	FZDGHL	FZDGHF	FZHSX

Pivot Door			
	Leaf	Jamb	Handle
Single	FZSGPL	FZSGPF	FZHSX FZHSL FZSCP FZSFP FZSLP
Single - Double Glazed	FZCL	FZCJ	FZHSX FZHSL FZSCP FZSFP FZSLP


Sliding Door				
	Leaf	Jamb	Rail	Handle
Single	FZSGSL	FZSGSJ	FZSESR FZSFSR	FZSCP FZSFP FZSLP
	FZSSSL FZSNSL	FZSSSJ		
Double	FZDGSL	FZDGSJ	FZDESR FZDFSR	FZSCP FZDFP

application guide

planning with doors

This chart outlines the possible door swing/slide orientations.

- Left or right handedness is determined by the opening slide/swing direction of travel
- Locking or non-locking doors are available
- Keyed Lock is always on the outside and Thumb Turn on the inside

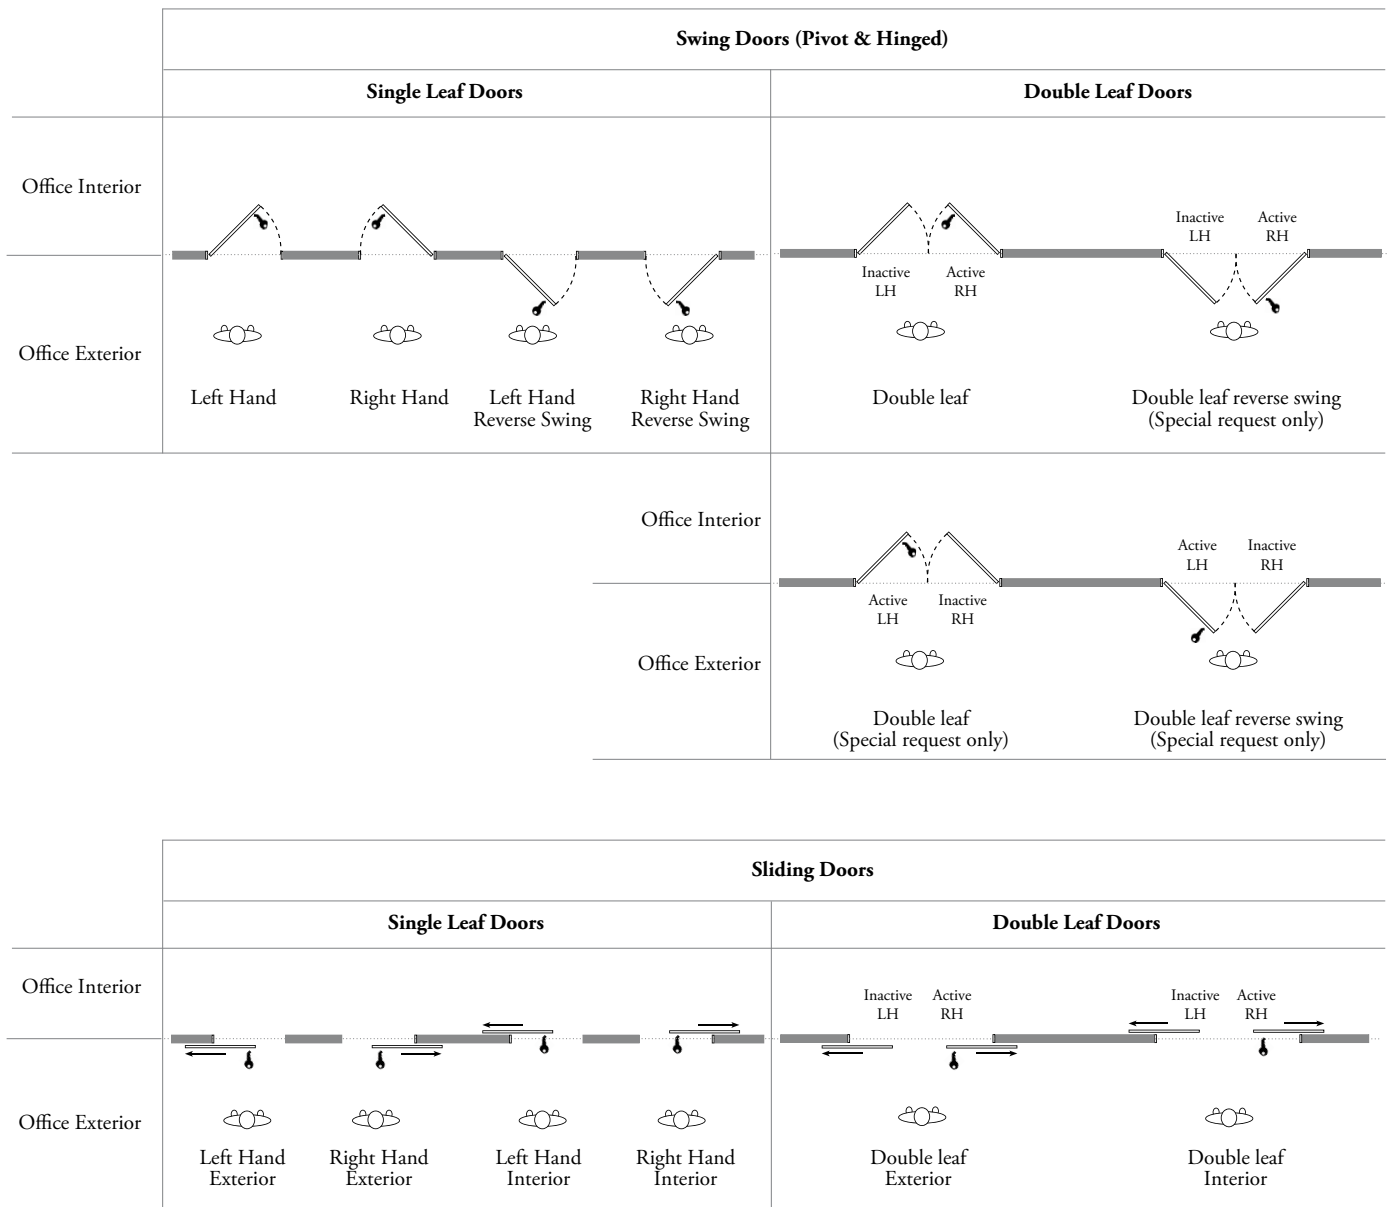

Legend	
	Active locking door applicable



planning with swing doors & frames

The following should be considered when installing Optos Door and Frame components.

critical dimensions

Dimensions are measured to centerlines and dependent on the application type




- A** Centerline to vertical Centerline at Optos to Altos join
- B** Optos Centerline to vertical Centerline of post door frame
- C** Overall length according to Altos Centerline module length

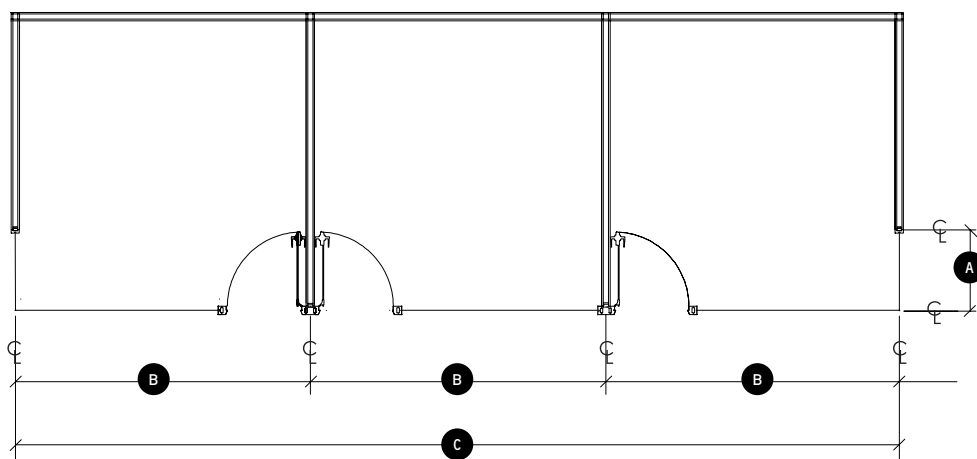

Vertical Optos to Altos joint

top spacer

- Plan sizes to optimize pre-cut lengths for waste reduction
- Overlap top spacer and ceiling beam joins by 2'
- Joins require a splice kit

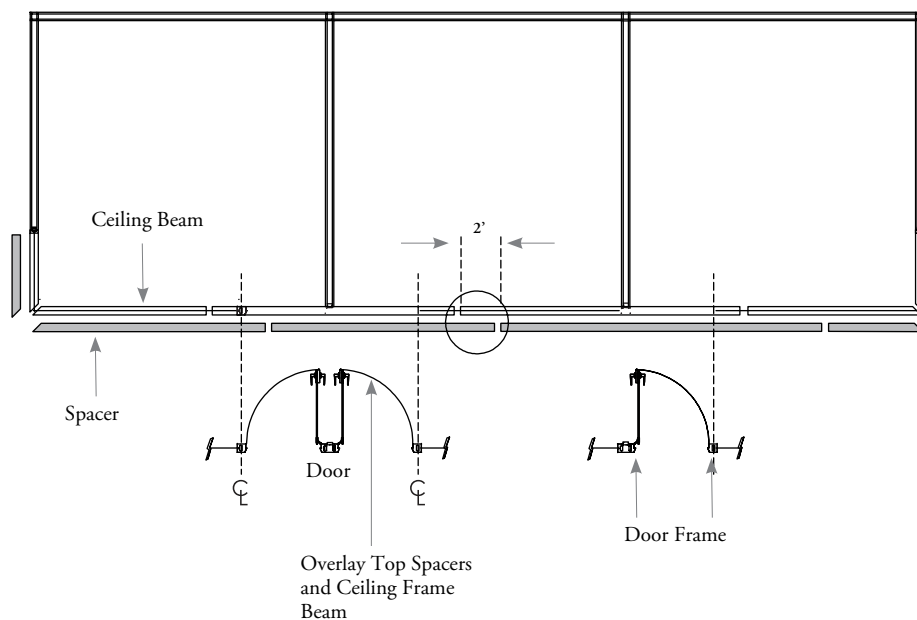
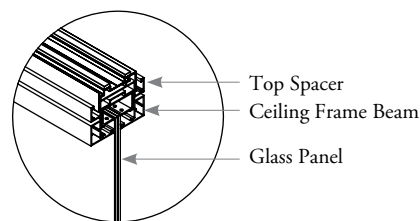


Top Spacer Mitered Corner

planning with swing doors & frames (continued)

ceiling frame beam



- Plan sizes to optimize pre-cut lengths and reduce waste
- Different combinations of Altos/Optos corners require specific ceiling frame beam lengths to accommodate modification on site

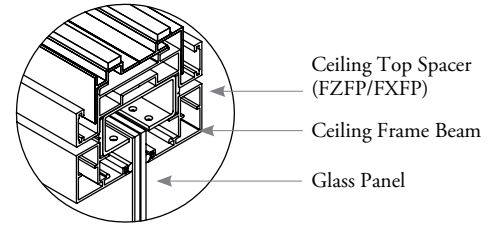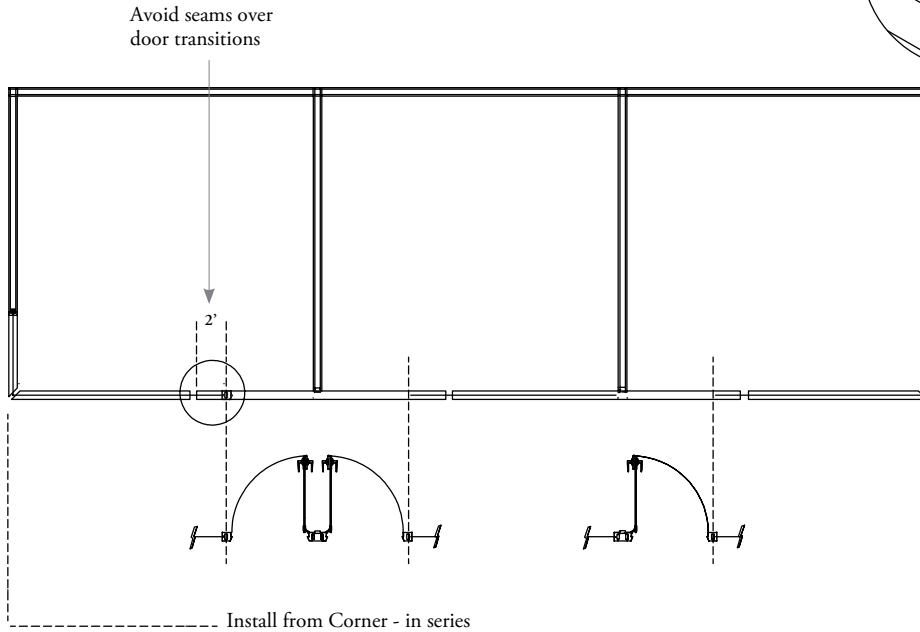

base frame & channel assemblies

floor channel




- Plan size to optimize pre-cut length to reduce waste
- Finishes on vertical centerline
- Stops at door frame centerline

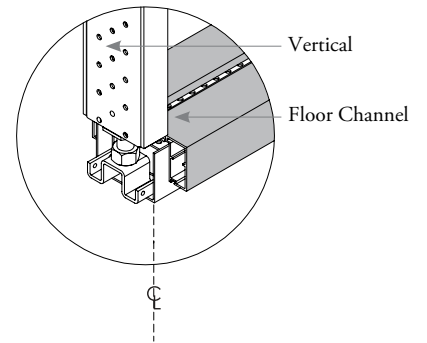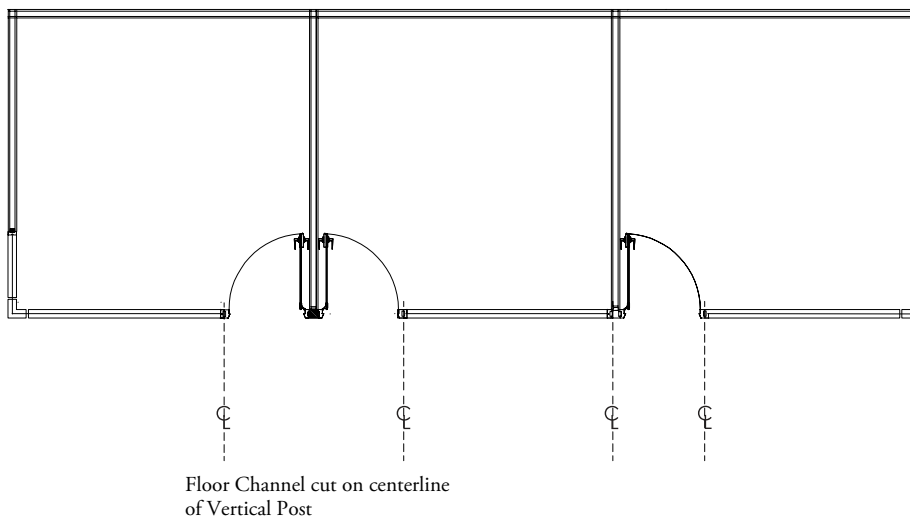

planning with swing doors & frames (continued)

base frame

- Provides leveling and supports the glass
- Stops at ends of door vertical faces
- Lengths are spliced together with kit

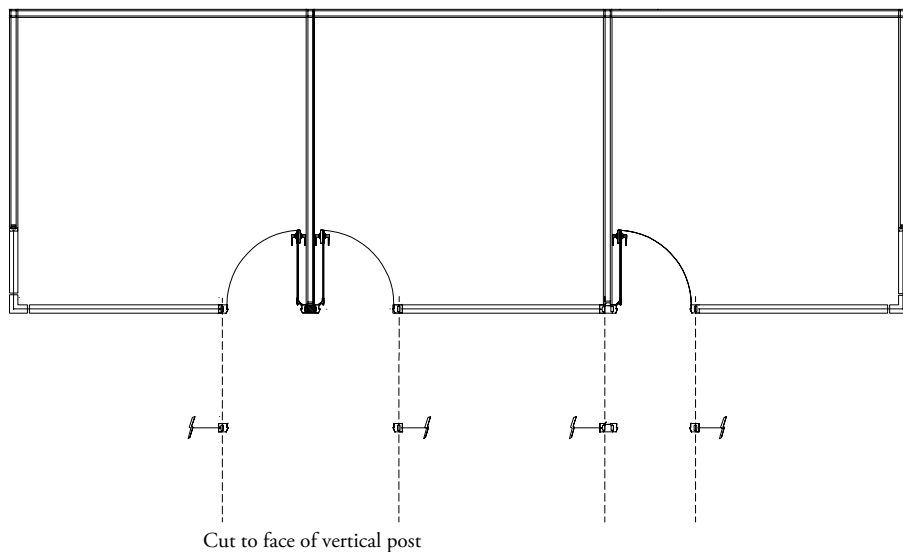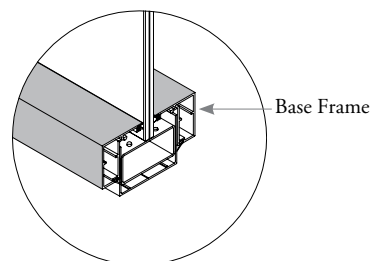

planning with double glazed swing doors

Double glazed doors have specific height specifying requirements.

specifying double glazed doors


The Strike Node and Hinge Node measurement is to define the door height needed at the installation site of the door.

- Double Glazed Door Height is sized in 1/4" increments and tailored to the location of the door to compensate for site's specific conditions.
- The purpose of the door increments is to minimize the gap under the door and maintain a gap close to the nominal 1/2"

specifying double glazed door height increments


Step 1: Use a laser to survey the door swing area

- Door Swing Area is the half circle area, with the hinge node as the center, and the jamb line as the radius.
- Measure every node in the door swing area.
- Both Strike and Hinge Nodes are to be measured separately.

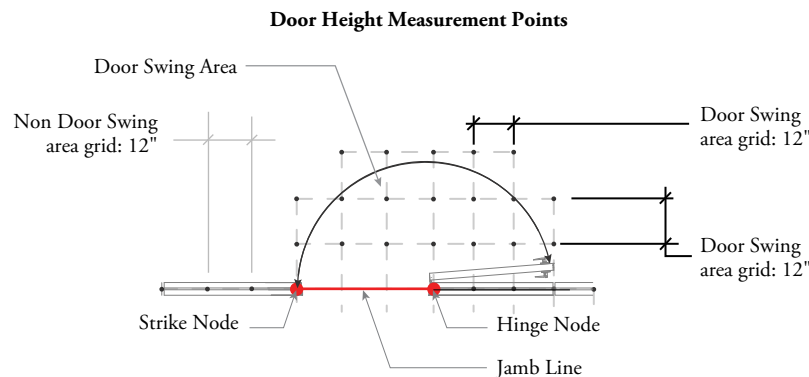

Step 2: Determine the minimum node between Strike and Hinge Nodes

Example: Minimum node between Strike and Hinge Nodes: 100-3/8" (Hinge Node in example below)

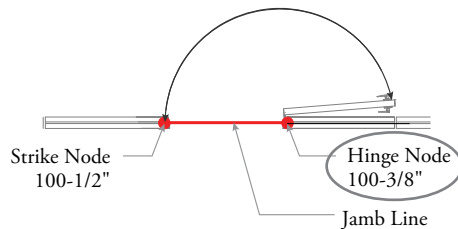

Step 3: Round to the nearest 1/4" height increment using the table below for specifying the correct door height:

Measured Minimum Node Height	Ceiling Height	Door Height Increment
99-7/8 to 100-1/16"	100"	(A) 0"
100-1/8 to 100-5/16"	100"	(B) 1/4"
100-3/8 to 100-9/16"	100"	(C) 1/2"
100-5/8 to 100-13/16"	100"	(D) 3/4"
100-7/8 to 101-1/16"	101"	(A) 0"

Example:

Measured Minimum Node Height: 100-3/8"

Rounded 1/4" Door Height: 100-1/2"

planning with double glazed swing doors (continued)


Double glazed doors have specific height specifying requirements.

specifying double glazed doors

The following should be considered when selecting door increments. Hardware datums from the floor may vary depending of the floor site conditions.


Door adapting to floor variance 3/4" or less

- Doors can accommodate variances in the floor in 1/4" increments up to 3/4" while maintaining a level position of the hardware across the wall system when the floor variance is 3/4" or less.
- See example below:

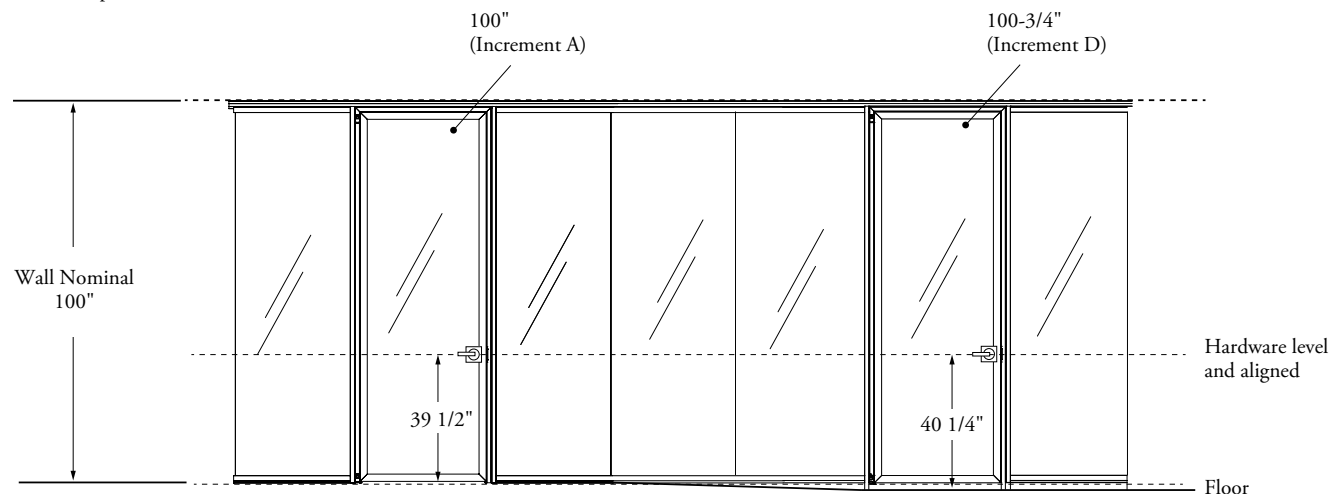

Door adapting to floor variance 1" or more

- Doors that need to accommodate a variance in the floor greater than 1" will use the next door increment height (eg 101").
- The position of the hardware will reset to the doors nominal distance in relation to the floor.
- See example below:

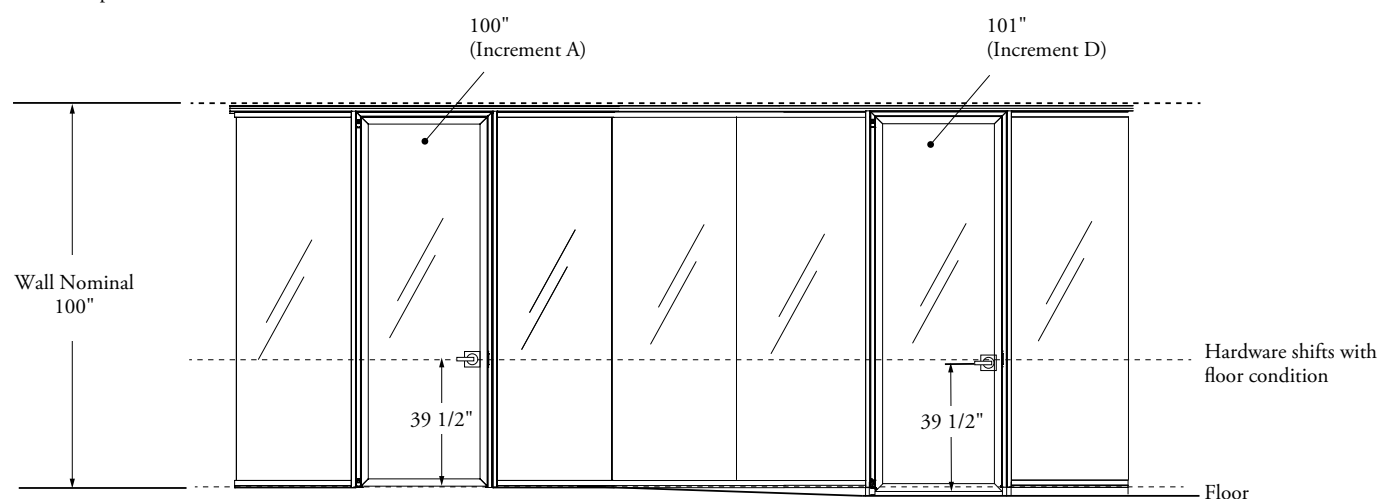


application guide

planning with door stops


The following should be considered when determining the placement of Optos doorstops.

- Doorstops are provided with single and double hinged glass door leaves and solid hinged door leaves (i.e. NOT with Door Jambs)

When there is a span of Optos behind a swing door, the doorstop can be mounted directly to the base Horizontal Trim.

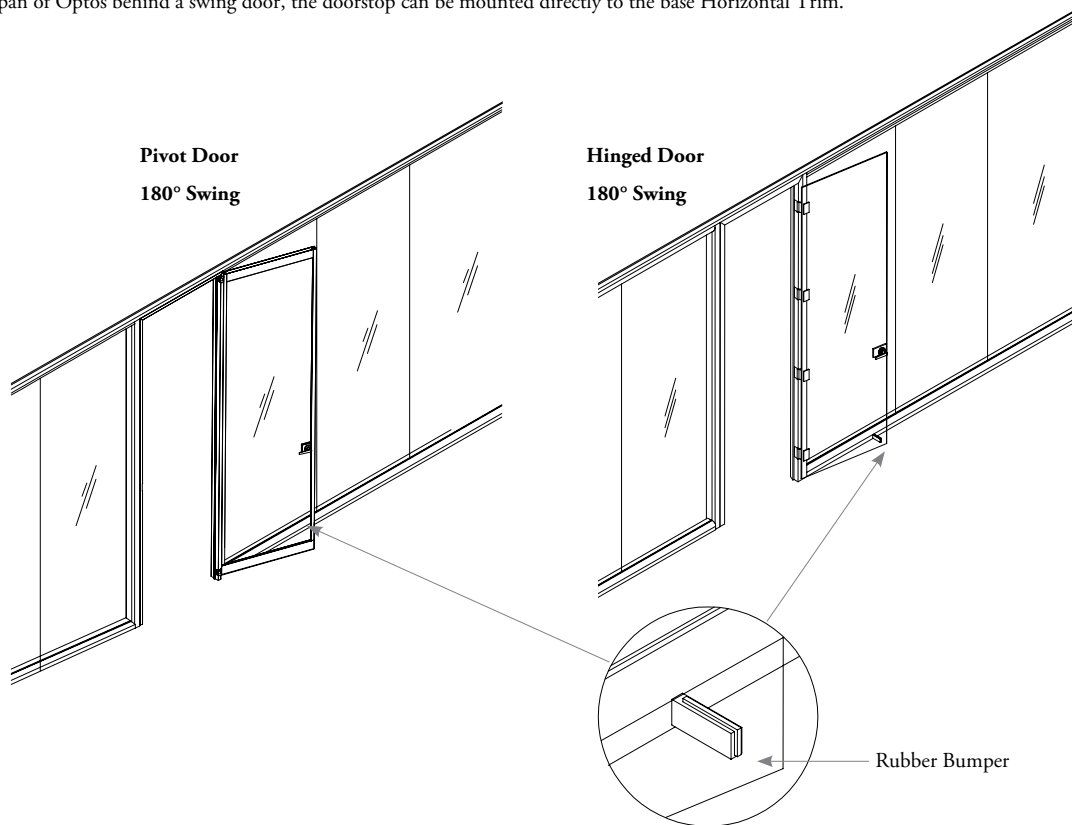

If no Optos is present in the swing path of the glass door, or if the angle of contact is greater than 90°, the Doorstop has an option for floor mounting.

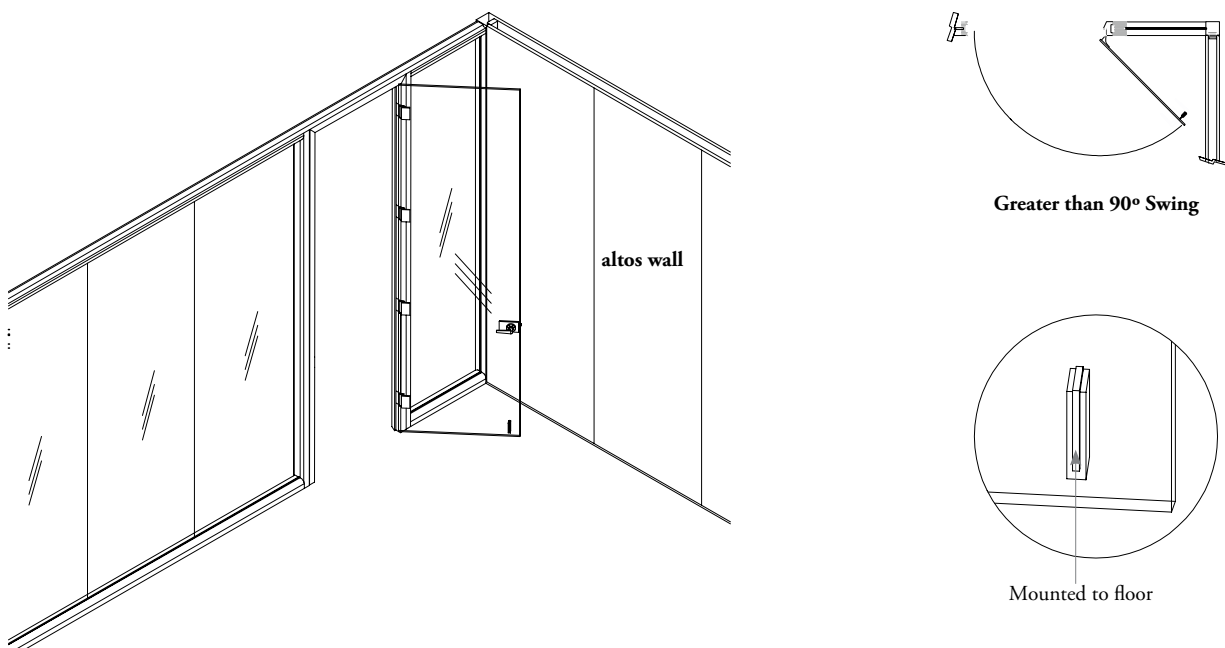

planning with single sliding doors


Three vertical elements are required for Single Sliding Door installations. The following scenarios outline various ways to plan a Sliding Door.

scenario 1

Central sliding Door between a 10mm Glass Corner and a Wall Start.

Required Vertical Structural Components:

- 1 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 2 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 3 Adjustable Wall Start (FZWS/FXWS) + Vertical Trim (FZFTV/FXFTV)

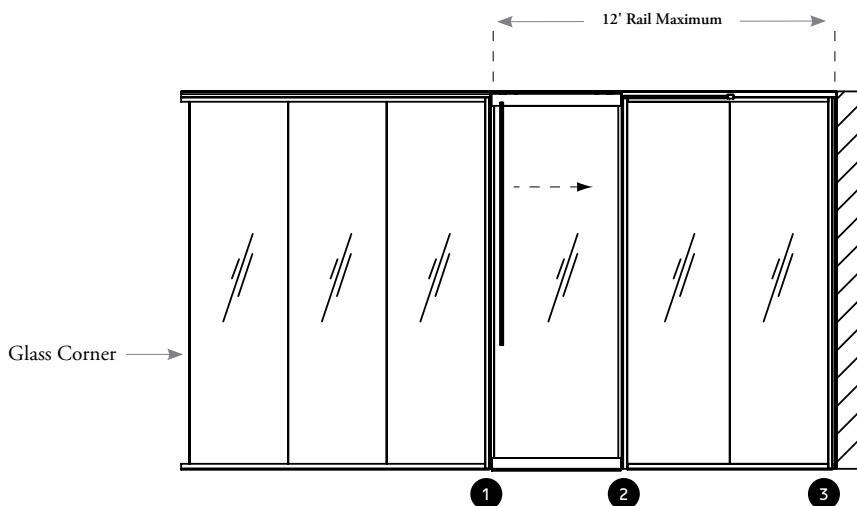


scenario 2

Sliding Door against a Wall and a Corner on the opposite side

Required Vertical Structural Components:

- 1 Adjustable Wall Start (FZWS/FXWS) + Vertical Trim (FZFTV/FXFTV)
- 2 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 3 3rd Post in the Standard Glass Sliding Door Jamb (FZDBJP/FXDBJP)

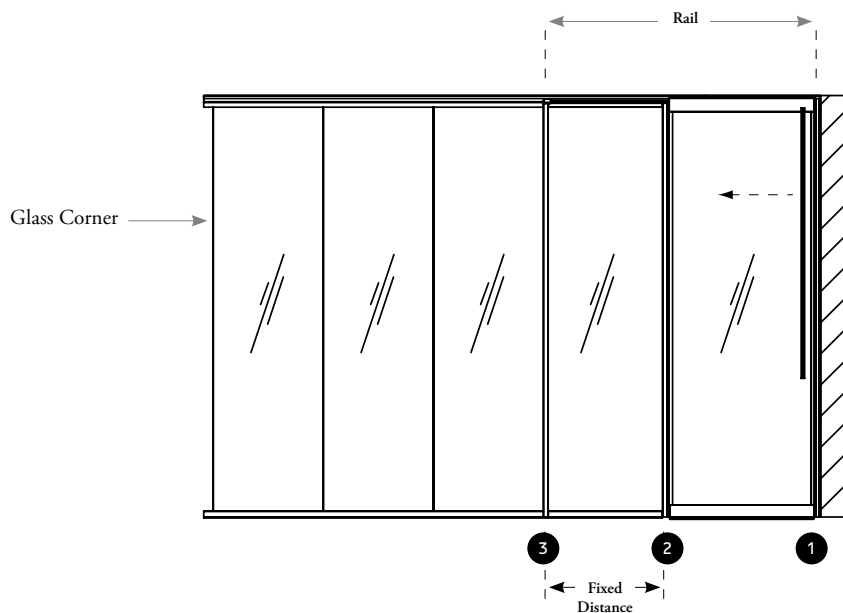


scenario 3

Central Sliding Door beside a Two-Way Altos to Optos Corner

Required Vertical Structural Components:


- 1 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 2 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 3 Two-Way 90° Connection with Altos (FZCA2F/FXCA2F)

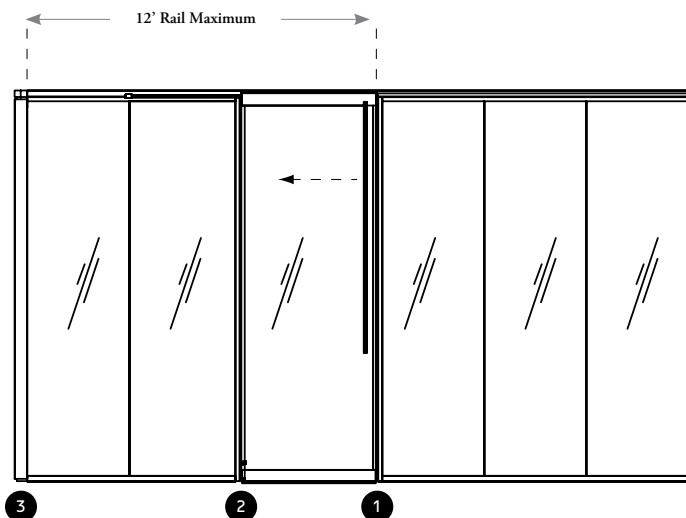

planning with single sliding doors (continued)

fixed format


Use fixed rail and jamb when there is a glass corner or the glass wall run is greater than 12'.

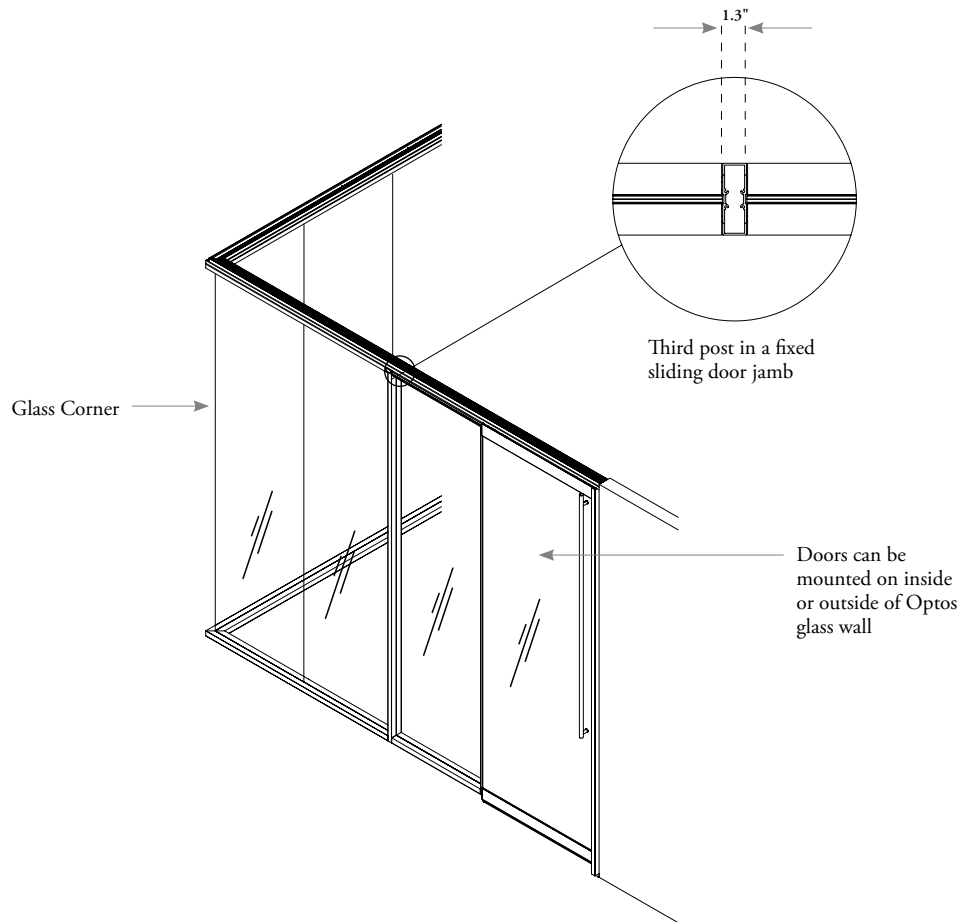


planning with single sliding doors (continued)

extended format

Use extended rail and jamb between drywall or Altos or Optos where center to center end posts are no greater than 12' apart.

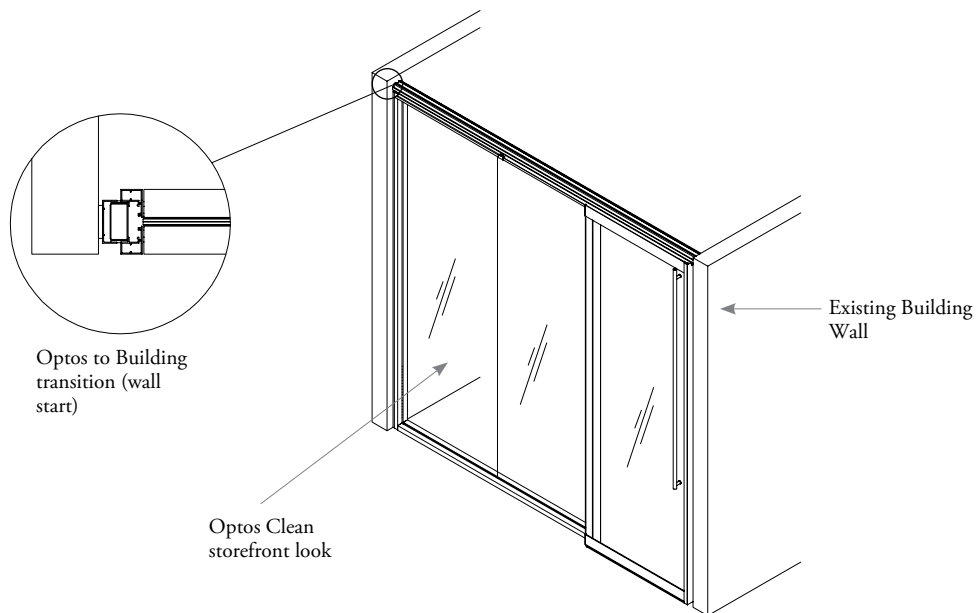

Whenever planning with extended rail and frame format, the end of rail connection must be made with either a wall start or one of the two- or three-way connections for Sliding Door Ends.

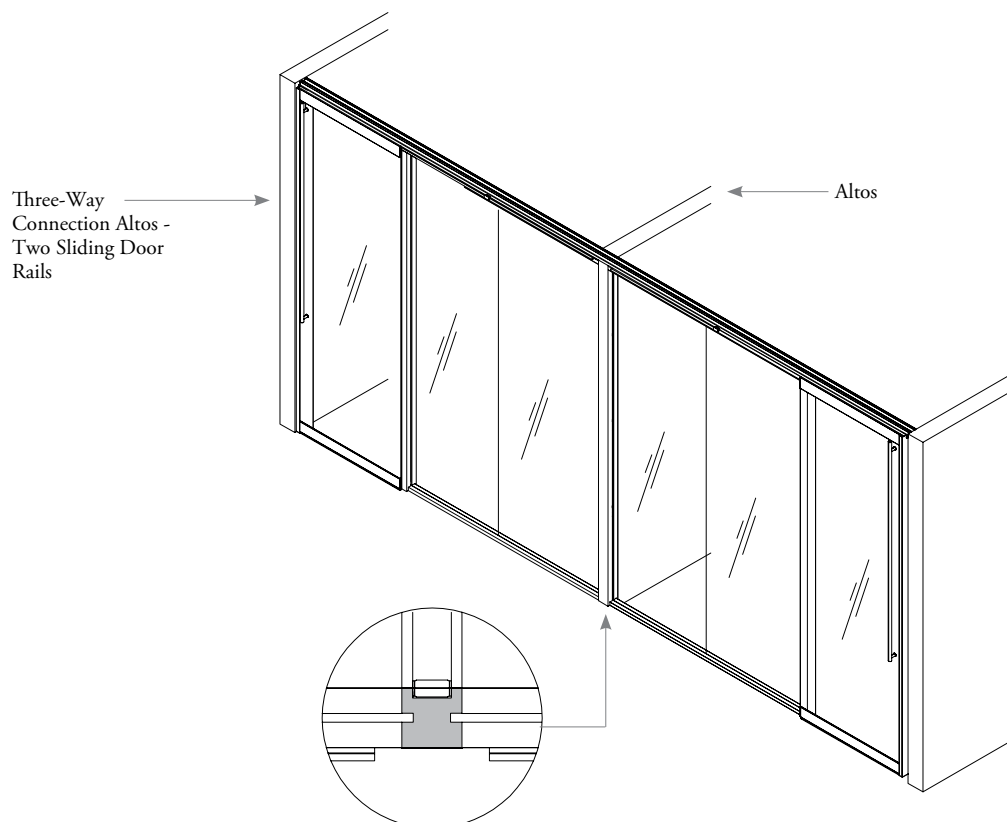

application guide

planning with double sliding doors


Four vertical elements are required for Double Glass Sliding Door installations. The following scenarios outline various ways to plan with Double Sliding Doors.

scenario 1

Double Sliding Door between Wall Starts

Required Vertical Structural Components:

- 1 Adjustable Wall Start (FZWS/FXWS) + Vertical Trim (FZFTV/FXFTV)
- 2 Adjustable Wall Start (FZWS/FXWS) + Vertical Trim (FZFTV/FXFTV)
- 3 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 4 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)

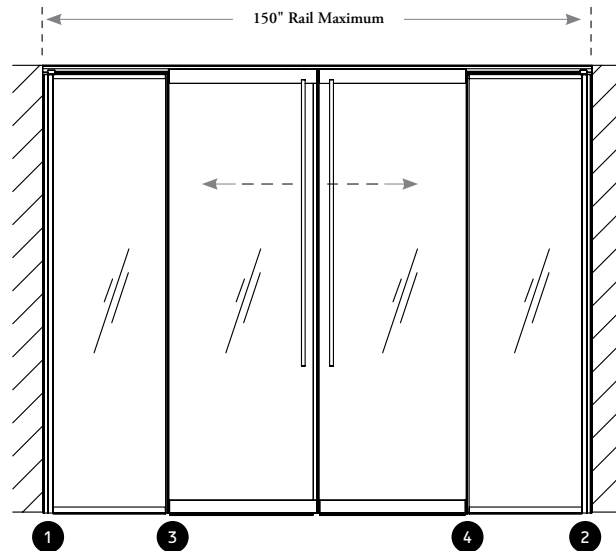


scenario 2

Double Sliding Door on a Straight Glass Run

Required Vertical Structural Components:

- 1 Integrated Post within Standard Double Sliding Door Jamb (FZDLJP/FXDLJP)
- 2 Integrated Post within Standard Double Sliding Door Jamb (FZDLJP/FXDLJP)
- 3 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 4 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)

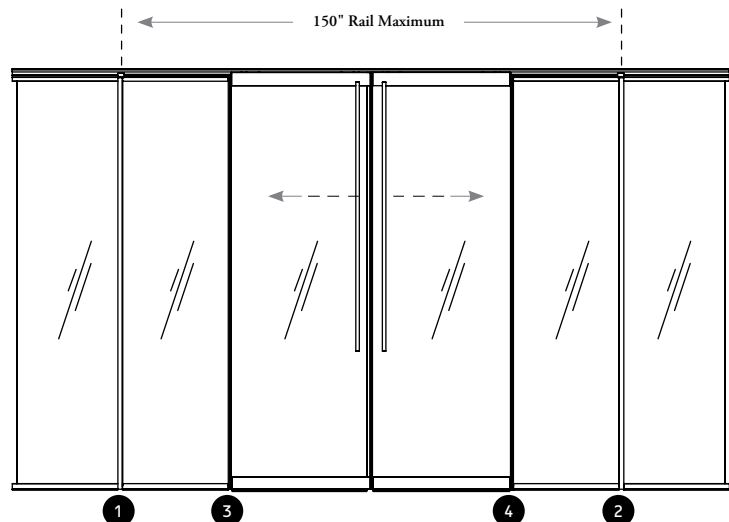


scenario 3

Double Sliding Door between two Altos Two-Way Corner Connections

Required Vertical Structural Components:


- 1 Two-Way Connection for Sliding Door Rail End with Altos (FZCA2F/FXCA2F)
- 2 Two-Way Connection for Sliding Door Rail End with Altos (FZCA2F/FXCA2F)
- 3 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)
- 4 Vertical Post (FZFV/FXFV) + Vertical Trim (FZFTV/FXFTV)

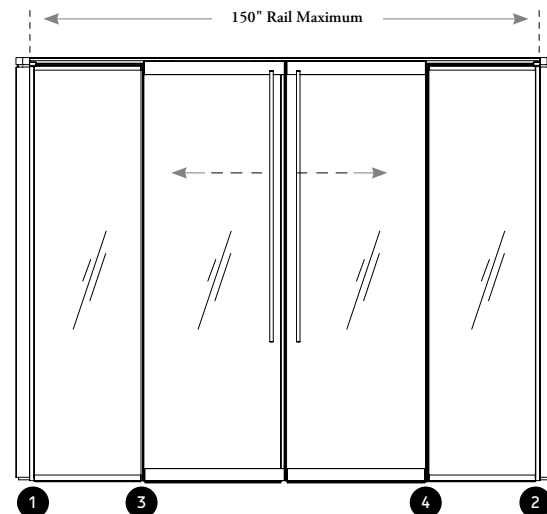

planning with double sliding doors (continued)


fixed format

Use fixed rail and jamb when there is a glass corner or the glass wall run is greater than 146".

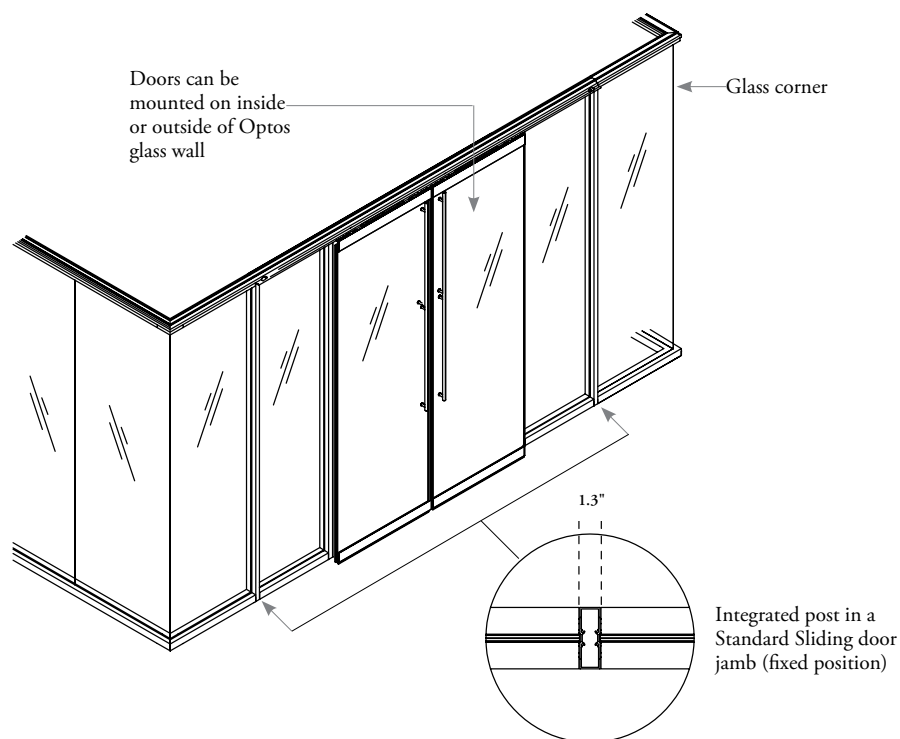






extended format

Use extended rail and jamb between drywall or Altos where center to center between end posts is no greater than 146".

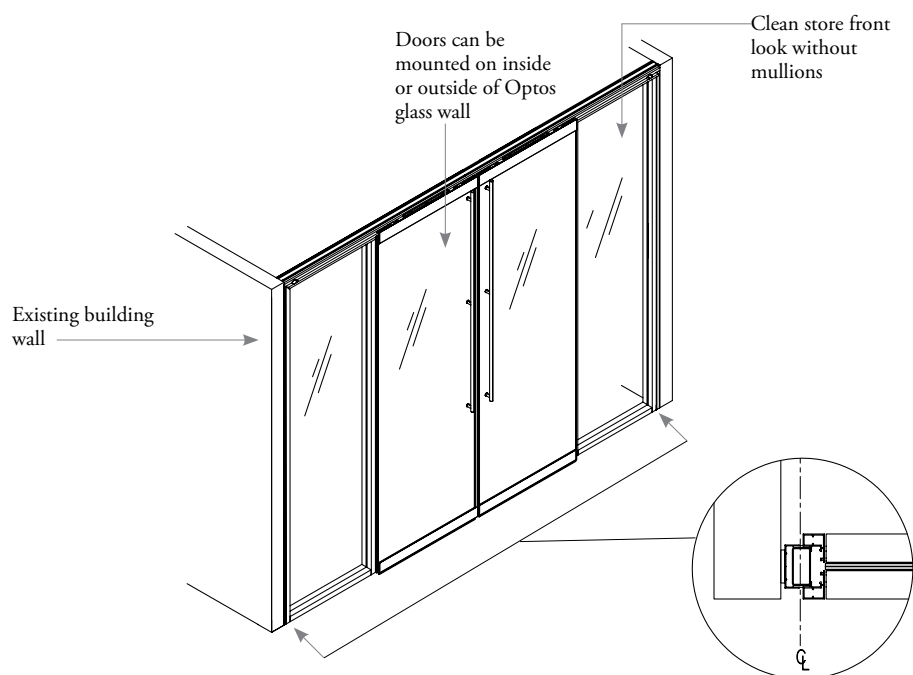


planning with double sliding doors (continued)


Both end conditions of door module must be the same either fixed rail and jamb integrated post or wall start/Altos connection.

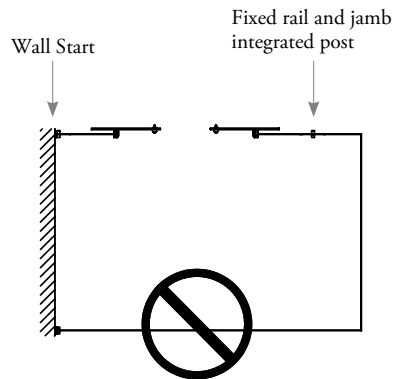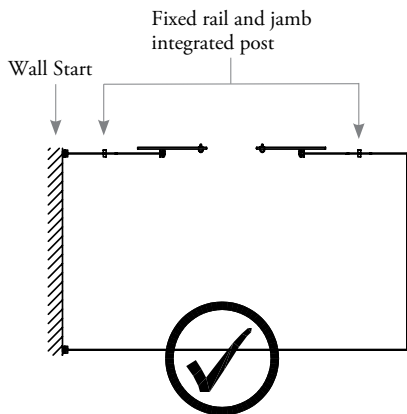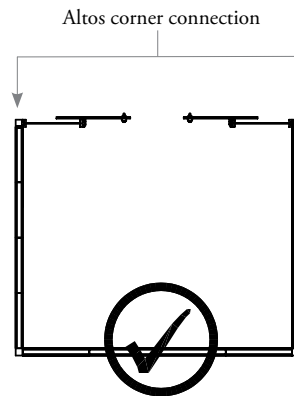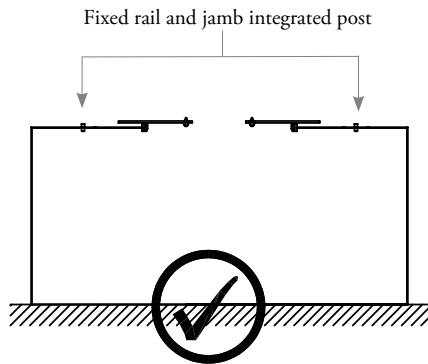



Fixed Double Sliding Doors **cannot** be placed between two drywalls

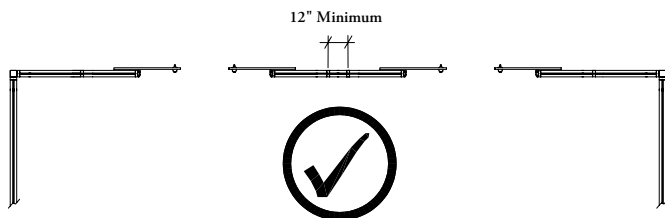

Two fixed jamb doors must be separated by a minimum of 12"

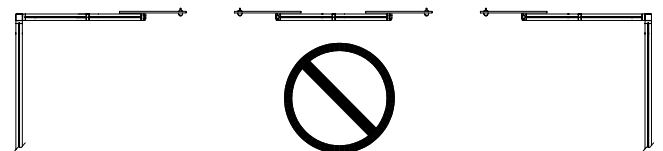


Two adjacent fixed jamb doors **cannot** share a common integrated post

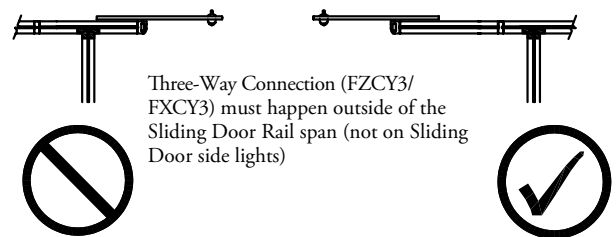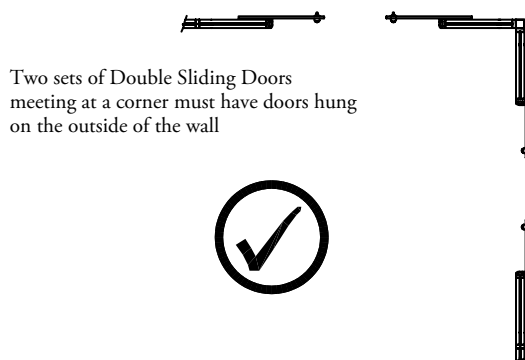



planning with double sliding doors (continued)

sliding door rail


The Sliding Door rail replaces the Ceiling Frame Beam when Sliding Doors are used.

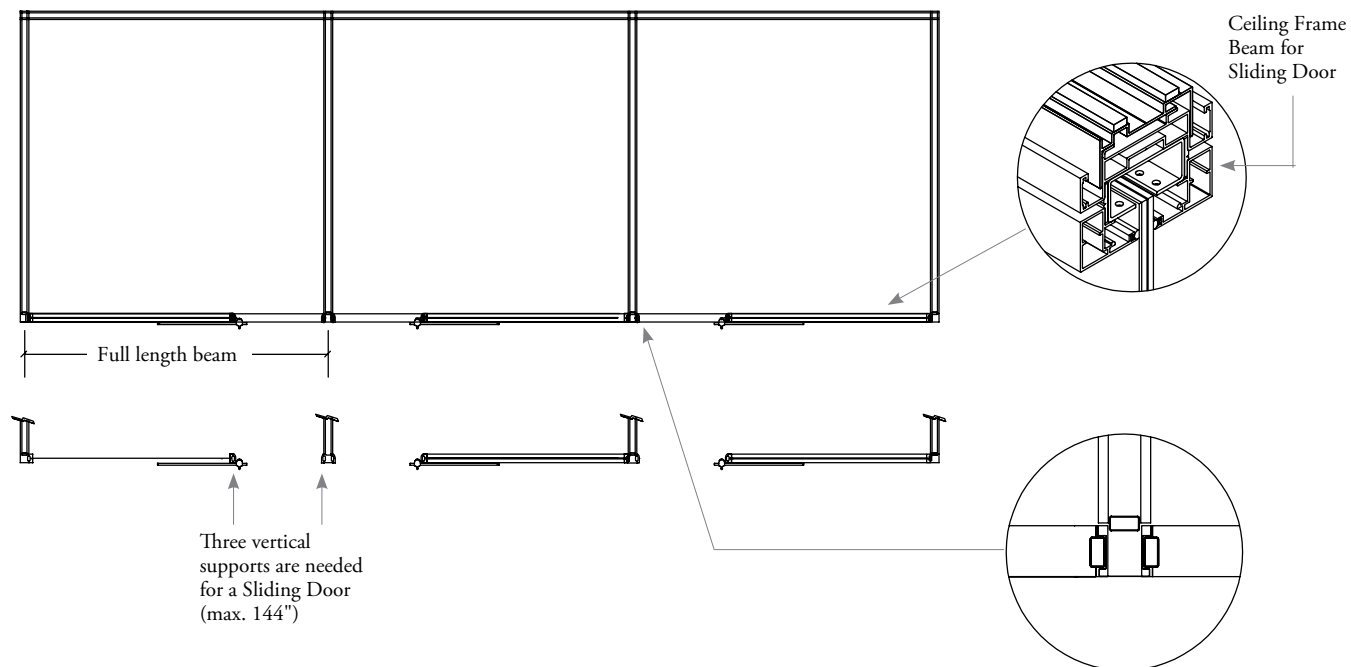

The following outlines the handles available on the swing and sliding door programs.

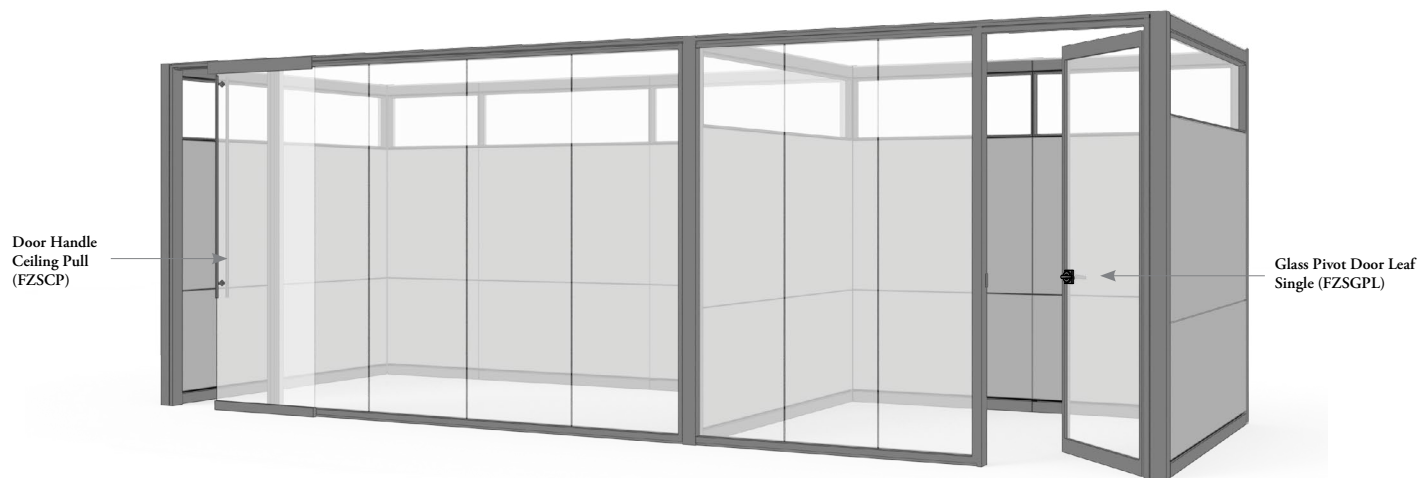

Door Handle Schlage ALX Series (FZHSX)




Door Handle Schlage L Series (FZHSL)




Door Handle Ceiling Pull (FZSCP)



Door Handle Floor Pull (FZSFP)
















Door Handle Linear Pull (FZSLP)



Control Key (FXKK)













- Used to remove or install an interchangeable core

lever details

	Levers	
Series Name	ALX Series	L Series
Product Code	Door Handle Schlage ALX Series (FZHSX)	Door Handle Schlage L Series (FZHSL)
Lever Type	  Schlage's name Tecnion's name Athens Type A Rhodes Type R	  07 Type 07 06 Type 06
Lock Type	 Cylindrical Lock	 Mortise Lock
Lock Function	  Push button lock - ADA Std on ALX series No Lock - Passage set	 Easy turn - ADA Schlage L583-363
Height AFF	39-3/4"	37-1/2"
Keying	  Conventional, key in lock (KIL) 6 pin Full Size Interchangeable Core (FSIC) cylinder 6 pin	  Conventional Mortise 6 pin Full Size Interchangeable Core (FSIC) cylinder 6 pin
Handle Finish	Satin chrome ANSI/ BHMA 626, US26D and Matte Black ANSI/ BHMA 622, US19	Satin chrome ANSI/ BHMA 626, US26D and Matte Black ANSI/ BHMA 622, US19

- Inside lever always free for immediate egress
- Doors specified with "Conventional Cylinder" are keyed randomly (two keys provided per door)
- Doors specified with "Interchangeable Core Cylinder" are keyed randomly (two keys provided per door) but cylinders can be removed by a universal control key (Order Key Separately)
- After installations, customers may choose to relocate or replace interchangeable core cylinders to suit their security needs
- Keying is std Schlage Everest S123 Keyway, The Everest "S123" key is backwards compatible to the Everest "C123" keyway lock cylinders. However, the "S123" key is not backwards compatible with the "C" keyway lock cylinders.
- The Keyway is open, meaning they are available to end users from locksmiths for key duplication without any official procedures
- When keys are lost or not available, interchangeable cores can be removed and replaced using control keys. Control keys are available only for handles that have interchangeable core cylinders. Control keys need to be order separately



pull details

	Pulls				
Series Name	OS Series			TE Series	
Product Code	Door Handle Ceiling Pull (FZSCP)			Door Handle Floor Pull (FZSFP)	
					
Handle Type	(A) Ceiling Non Locking	(B) Ceiling Locking	(C) Ceiling Locking with ADA thumbturn	(D) Floor Non Locking	(E) Floor Locking with ADA thumbturn
Lock Function					
Visual characteristics	1" Tubular steel pull	1" Tubular steel pull Patch cover: • Die cast construction • No exposed fasteners	1" Tubular steel pull Patch cover: • Die cast construction • No exposed fasteners	1-3/8" Tubular steel pull	1-3/8" Tubular steel pull Lock integrated in pull
Pull Finish options	Stainless Steel ANSI / BHMA 630, US32D or Steel Painted	Stainless Steel ANSI / BHMA 630, US32D or Steel Painted	Stainless Steel ANSI / BHMA 630, US32D or Steel Painted	Stainless Steel ANSI / BHMA 630, US32D or Painted Matte Black	Stainless Steel ANSI / BHMA 630, US32D or Painted Matte Black
Pull Length	Configurable to ceiling heights in 1" increments	Configurable to ceiling heights in 1" increments	Configurable to ceiling heights in 1" increments	48"	48"
Height AFF	39-3/4" from finished floor to bottom of handle	39-3/4" from finished floor to bottom of handle	39-3/4" from finished floor to bottom of handle	48-1/2" from finished floor to top of pull	48-1/2" from finished floor to top of pull
Keying	No Lock	Full Size Interchangeable Core (FSIC) cylinder 6 pin Single  Double 	Full Size Interchangeable Core (FSIC) cylinder 6 pin Single  Double 	No Lock	Full Size Interchangeable Core (FSIC) Rim Cylinder Single  Double 
Retrofitting between Locking & Non-Locking	No	No	No	Yes	Yes
ADA Code compliance	Yes	No	Yes	No	No

• 1-1/2" clear space between glass and handle

• When keys are lost or not available, interchangeable cores can be removed and replaced using control keys. Control keys are available only for handles that have interchangeable core cylinders. Control keys need to be ordered separately

pull details (continued)





	Pulls	
Series Name	Linear Series	
Product Code	Door Handle Linear Pull (FZSLP)	
		
Handle Type	(F), (G) Perpendicular, Non-Locking	(H), (I) Angular, Non-Locking
Lock Function		
Visual characteristics	7/8" x 9/16" Rounded rectangular aluminum tube, machined aluminum base 90° to door leaf	7/8" x 9/16" Rounded rectangular aluminum tube, machined aluminum base 35° to door leaf
Pull Finish options	Clear Anodized aluminum or painted aluminum	Clear Anodized aluminum or painted aluminum
Pull Length	13", 24"	13", 24"
Height AFF	34 5/8" from finished floor to bottom of pull	34 5/8" from finished floor to bottom of pull
Keying	No Lock	No Lock
Retrofitting between Locking & Non-Locking	n/a	n/a
ADA Code compliance	Yes	Yes

- 1-1/2" clear space between glass and handle
- When keys are lost or not available, interchangeable cores can be removed and replaced using control keys. Control keys are available only for handles that have interchangeable core cylinders. Control keys need to be ordered separately

application guide

handle compatibility

The following chart outlines which door/handle combinations are possible.

		Handles						
		Levers		Pulls				
		ALX Series (FZHSX)	L Series (FZHSL)	OS Series			TE Series	
				Door Handle Ceiling Pull (FZSCP)			Door Handle Floor Pull (FZSFP)	
								
Hinged Doors	Glass Hinged Door Leaf Single (FZSGHL)	✓		✓			✓ *	✓ *
	Solid Hinged Door Leaf Single (FZSSHL)	✓	✓	✓			✓ *	✓ *
	Solid Hinged Door Leaf with Glass Insert Single (FZSNHL)	✓		✓			✓ *	✓ *
	Glass Hinged Door Leaf Double (FZDGHL)	✓						
Pivot Doors	Glass Pivot Door Leaf Single (FZSGPL)	✓	✓	✓			✓ *	✓ *
	Glass Pivot Door Leaf Single - Double Glazed (FZCL)	✓ **	✓ **	✓ **			✓ **	✓ **
Sliding Doors	Glass Sliding Door Leaf Single (FZSGSL)			✓	✓	✓	✓	✓
	Solid Sliding Door Leaf with Glass Insert Single (FZSNSL)			✓	✓	✓	✓	✓
	Solid Sliding Door Leaf Single (FZSSSL)			✓	✓	✓	✓	✓
	Glass Sliding Door Leaf Double (FZDGSL)			✓	✓	✓	✓	✓

* Not available when a kickplate option is specified.

** Available with tempered glass option only.

handle compatibility (continued)

The following chart outlines which door/handle combinations are possible.

		Handles	
		Pulls	
		Linear Series	
		Door Handle Linear Pull (FZSLP)	
			
		(F), (G) Perpendicular, Non-Locking	(H), (I) Angular, Non-Locking
Hinged Doors	Glass Hinged Door Leaf Single (FZSGHL)	✓	✓
	Solid Hinged Door Leaf Single (FZSSHL)	✓	✓
	Solid Hinged Door Leaf with Glass Insert Single (FZSNHL)	✓	✓
	Glass Hinged Door Leaf Double (FZDGHL)		
Pivot Doors	Glass Pivot Door Leaf Single (FZSGPL)	✓	✓
	Glass Pivot Door Leaf Single - Double Glazed (FZCL)		✓
Sliding Doors	Glass Sliding Door Leaf Single (FZSGSL)	✓	✓
	Solid Sliding Door Leaf with Glass Insert Single (FZSNSL)	✓	✓
	Solid Sliding Door Leaf Single (FZSSSL)	✓	✓
	Glass Sliding Door Leaf Double (FZDGSL)	✓	✓

corners & connections –
10mm & 12mm

corners & connections – 10mm & 12mm

OPTOS TO OPTOS CORNER CONNECTION BASICS96

OPTOS TO OPTOS CORNER CONNECTION WITH DOORS BASICS . . .98

OPTOS TO DRYWALL CORNER CONNECTION BASICS99


OPTOS TO ALTOS CORNER CONNECTION BASICS102

PLANNING WITH OPTOS CONNECTIONS105

optos to optos corner connection basics

Optos to Optos corners are available in two-, three- and four-way connections.

- All Corner Connections come with Base and Ceiling components
- Clear Transparent corners to be created with no solid verticals
- Corners with Doors require different connections than corners joining glass

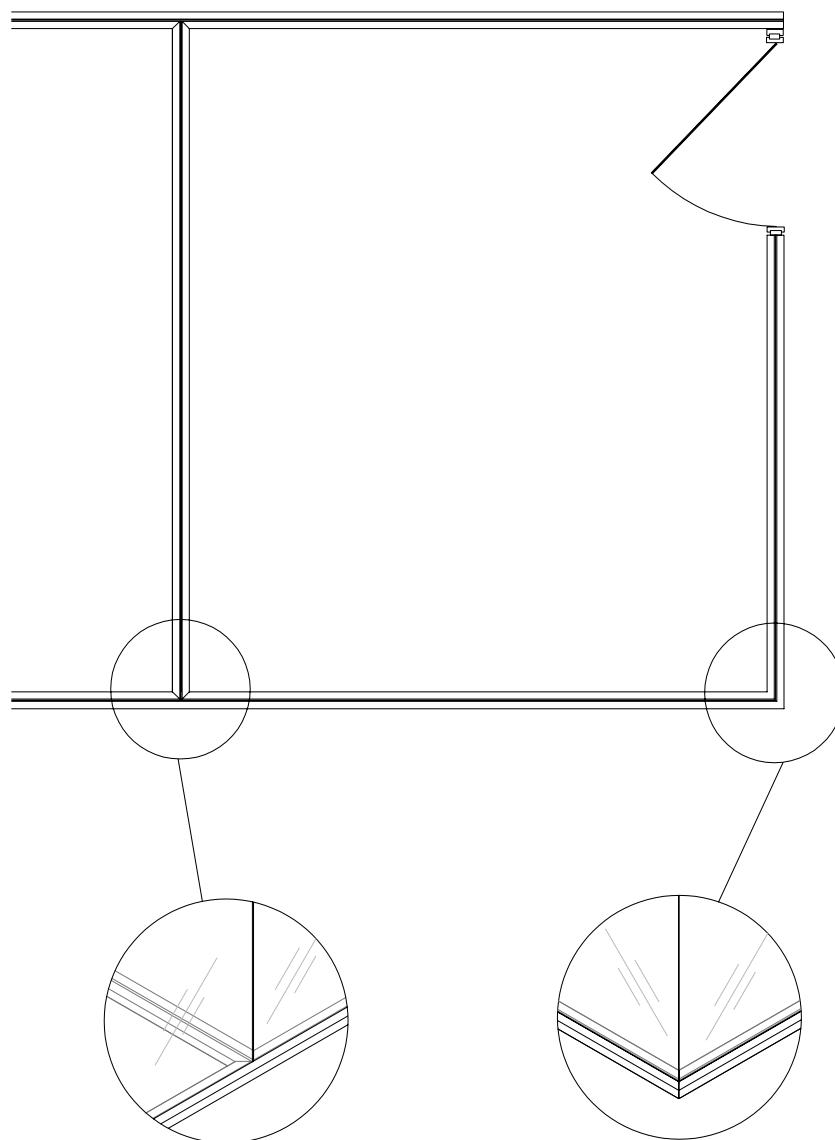

Three-Way Corner Connection (FZCY3/FXCY3)

- Provides the base and ceiling components for an off module three-way connection of pieces of glass
- This connection cannot be used for connections with doors

Two-Way 90° Corner Connection (FZCY2/FXCY2)


- Provides the base and ceiling components to connect two pieces of glass at 90°
- This corner cannot be used for connections with doors

optos to optos corner connection basics (continued)

articulating two-way and three-way connections


Two-Way Articulating Corner (FZF2CF2)

- Connects two straight runs of Optos at an angle

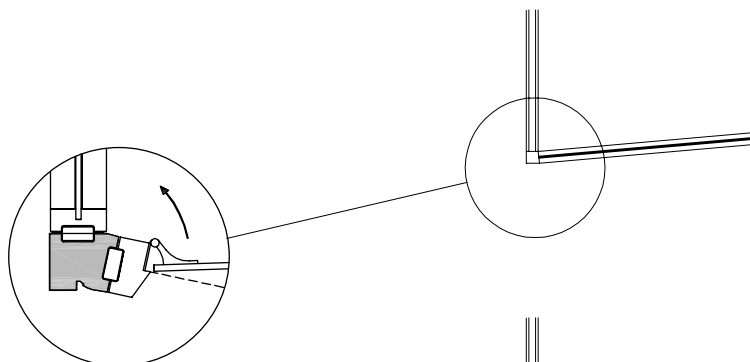

Three-Way Articulating Connection (FZF3CF3)


- Connects two angled runs of Optos with a straight demising wall

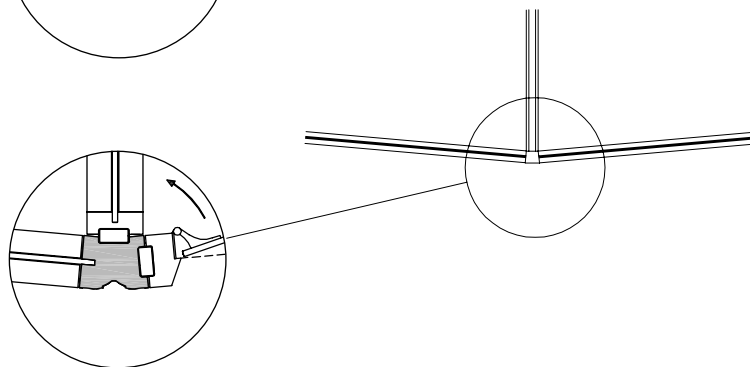

optos to optos corner connection with doors basics

Optos provides a number of connectors for connecting doors and glass at corners.

When specifying the door location, note that this is **not** the same as the swing of the door. Door location for corners indicates which side of the connection the door will be located on when viewed from the outside. The door swing direction is determined when specifying the actual door.



Two-Way 90° Corner Connection with Door (FZCZ2/FXCZ2)

- Joins a section of glass with a door at 90°
- Door location can be specified left or right




What's Included

1 outside 90° trim piece, 1 inside trim piece and connection hardware


What's Excluded

1 vertical post



Three-Way Connection with One Door (FZCZ3F/FXCZ3F)

- Joins two pieces of glass with one door
- Door location can be specified left, right or centered




What's Included

1 outside trim piece, 2 inside trim pieces, 1 top spacer and connection hardware

What's Excluded

1 vertical post



Three-Way Connection with Two Doors (FZCZ3B/FXCZ3B)

- Joins one piece of glass and two doors
- Available in one configuration:
Two doors at 180° (B)




What's Included

1 outside trim piece, inside trim (quantity varies with door configuration), 1 top spacer and connection hardware

What's Excluded

2 vertical posts



Two-Way Connection for Sliding Door Rail (FZCY2E/FXCY2E)

- 90° Connection for Sliding Door Rail Ends
- Available in two configurations, two Sliding Door Ends (shown) or two Sliding Door Ends (E) or one Sliding Door End and one Sliding Door Start (S)




What's Included

2 cover trims; 1 top spacer; square steel tube post, connection hardware kits


What's Excluded

Base channel assembly, ceiling spacer, glass



Three-Way Corner Connection Between Doors (FZCY3D/FXCY3D)

- Connects two doors with one piece of glass at a set distance apart




What's Included

3 cover trims, 1 top spacer, square steel tube post, connection hardware kits


What's Excluded

Base channel assembly, ceiling spacer, glass



Three-Way Corner Connection for Sliding Door Rails (FZCY3E/FXCY3E)

- Joins one pieces of glass with one or two Sliding Doors at 180°
- Available in two configurations, two Sliding Door Ends (shown) or one Sliding Door End (E) or one Sliding Door Start and one Sliding Door End (S)



What's Included


Ceiling & base trim kits, glass and base channel assembly between the posts, connection hardware kits

What's Excluded

2 Vertical post, ceiling spacer

optos to drywall corner connection basics

Optos to Drywall connections are available in two- and three-way connections.

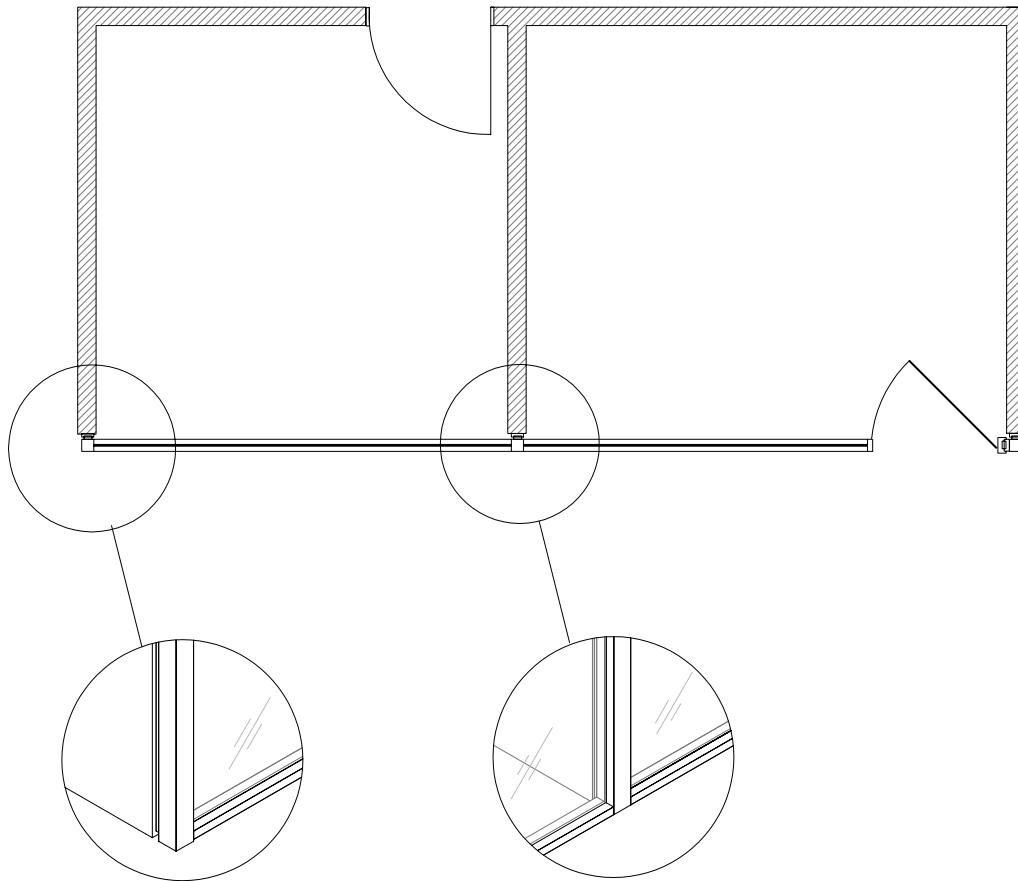













Two-Way Connection with Drywall (FZCW2/FXCW2)

Connects Optos Wall with existing building wall at 90°. Use Door (D) configuration for one door.

Three-Way Connection with Drywall (FZCW3/FXCW3)

Connects two Optos Walls at 180° to existing building wall. Use One Door (A) or Two Doors (B) configurations.

optos to drywall corner connection basics (continued)

corner connection	Top View	Ceiling Detail	Floor Detail
Two-Way Connection with Drywall - Glass (FZCW2_G/FXCW2_G) Connects Optos wall with existing building wall at 90°.			
Two-Way Connection with Drywall - Door (FZCW2_D/FXCW2_D) Connects Optos door with existing building wall at 90°.			
Two-Way Connection with Drywall for Sliding Door Rail End(FZCW2F/FXCW2F) Connects Optos sliding door end with existing building wall at 90°.			
Three-Way Connection with Drywall One Door (FZCW3_A/FXCW3_A) Connects one Optos wall and one door at 180° to existing building wall.			

optos to drywall corner connection basics (continued)

corner connection




Top View

Ceiling Detail

Floor Detail




Three-Way Connection with Drywall Two Doors (FZCW3_B/FXCW3_B)

Connects two Optos doors at 180° to existing building wall.

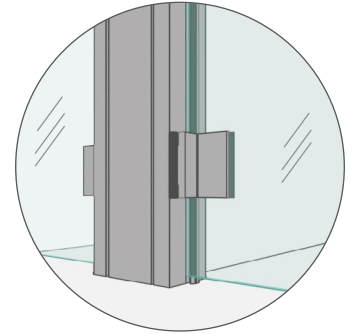

Three-Way Connection with Drywall Glass (FZCW3_G/FXCW3_G)




Connects two Optos walls at 180° to existing building wall.

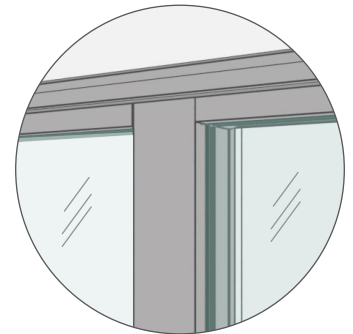

Three-Way Connection with Drywall for Sliding Door Rails (FZCW3E_N/FXCW3E_N)

Door End, Glass




Connects one Optos wall and one sliding door end at 180° to existing building wall.

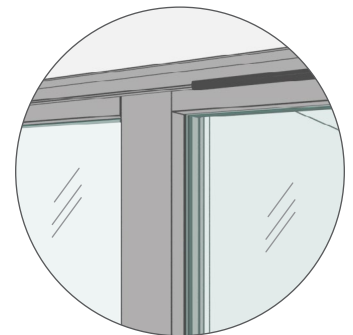

Three-Way Connection with Drywall for Sliding Door Rails (FZCW3E_T/FXCW3E_T)

Door Start, Door End

Connects one Optos sliding door end and one sliding door start at 180° to existing building wall.

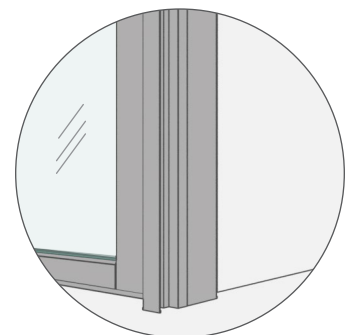


optos to altos corner connection basics

Optos to Altos connections are available inline, two- and three-way connections.

Where an Altos wall connects to an Optos to Altos corner always use an Altos Vertical Post (FKV) and must be specified separately. 180° Connection with Altos (FZCA1) is the only exception and the Optos Vertical Post (FZFV) is included in the corner package.

two-way connections

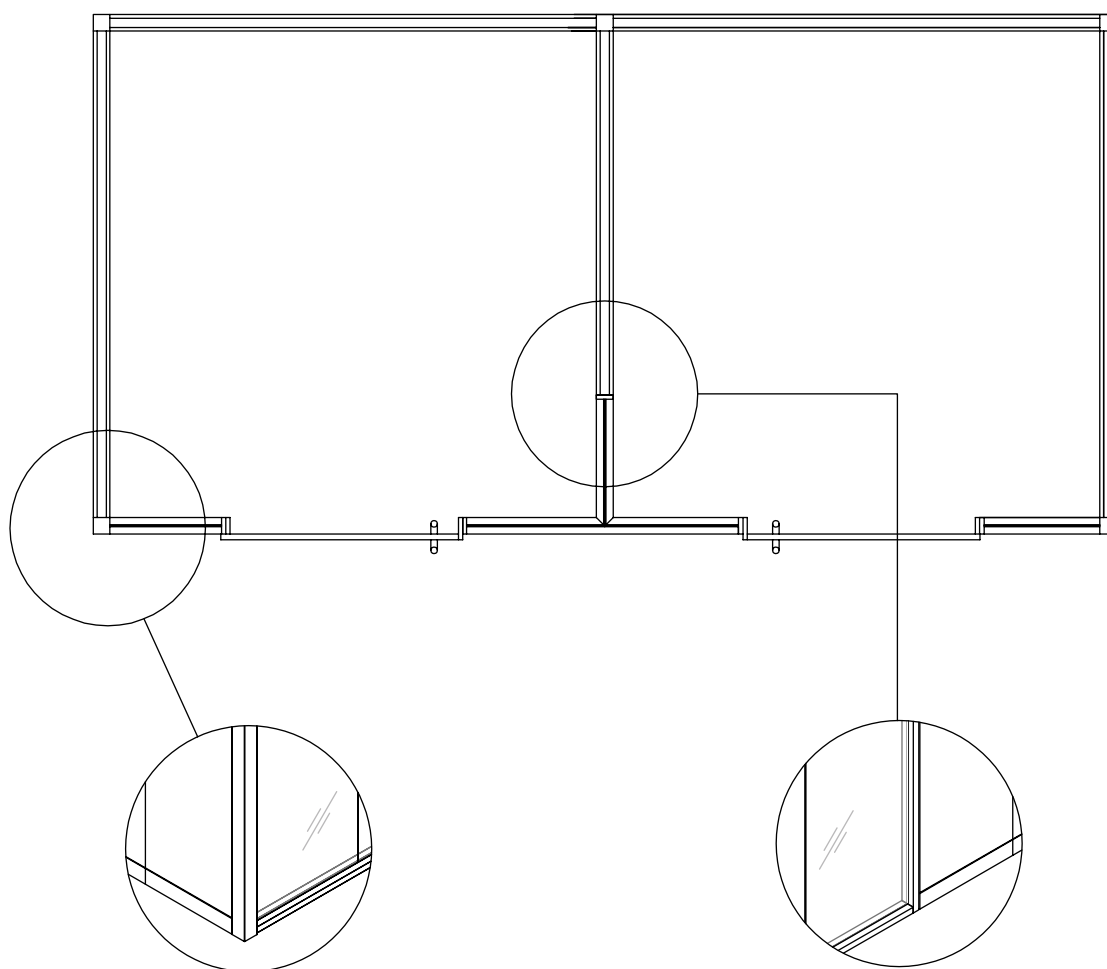

Two-Way 90° Connection with Altos (FZCA2/FXCA2)

Connects an Optos wall with an Altos wall at a 90° angle

180° Connection with Altos (FZCA1/FXCA1)


- Connects an Optos wall with an Altos wall at 180°
- Use Glass (G) configuration for Optos glass and Door (D) configuration with an Optos door

optos to altos corner connection basics (continued)

three-way and four-way connections


Four-Way Connection with Altos – Two Optos at 180° (FZCA4B/FXCA4B)

Connects two Optos walls at 180°
to two Altos wall at 180°




Three-Way Connection with Altos – Two Altos at 180° (FZCA3D/FXCA3D)

Connects two Altos walls at 180°
to an Optos wall




Three-Way Connection with Altos – Two Altos at 90° (FZCA3C/FXCA3C)

Connects two Altos walls at 90°
to an Optos wall





Three-Way Connection with Altos – Two Optos at 180° (FZCA3B/FXCA3B)

Connects two Optos walls at 180°
to an Altos wall



Three-Way Connection with Altos – Two Optos at 90° (FZCA3A/FXCA3A)

Connects two Optos walls at 90°
to an Altos wall

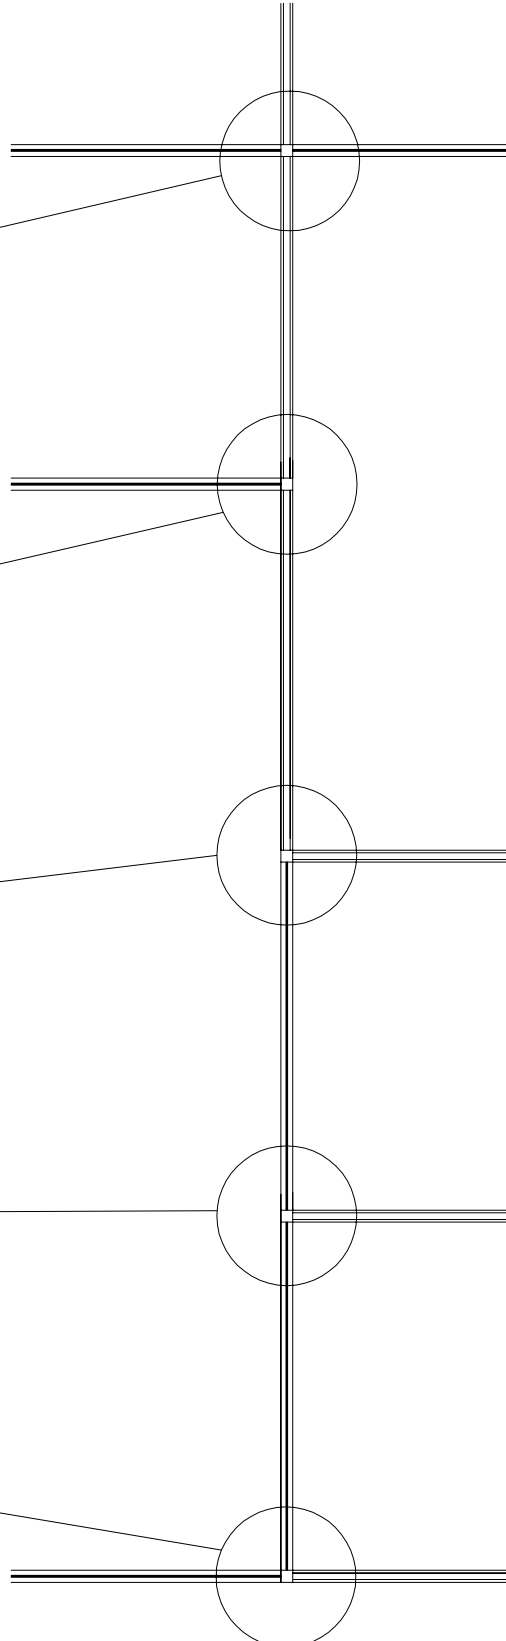


optos to altos corner connection basics (continued)

articulating two-way and three-way connections


Two-Way Articulating Corner (FZFCA2)

- Connects two straight runs one Optos, one Altos at an angle

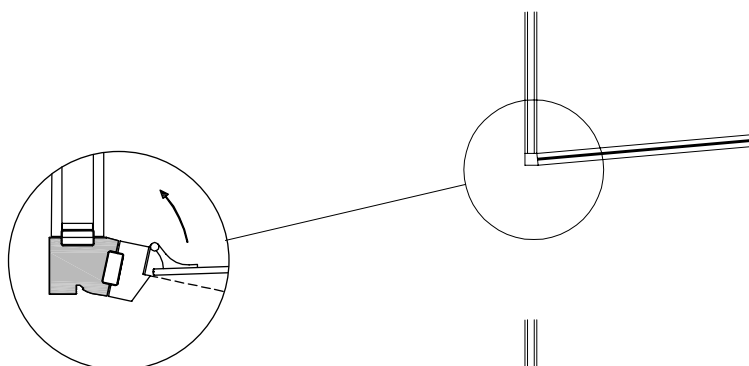

Three-Way Articulating Connection (FZFCA3)







- Connects two angled runs of Optos with Altos demising

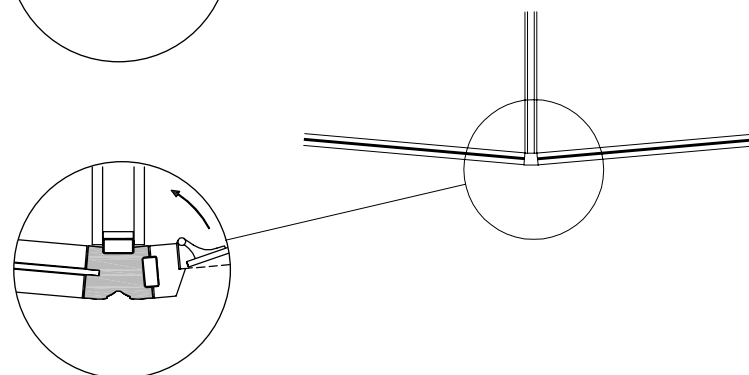

planning with optos connections




The following rules should be taken into consideration when planning with Optos Corners & Connections.

optos to optos

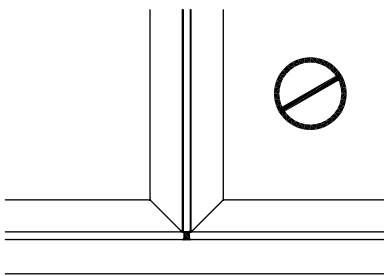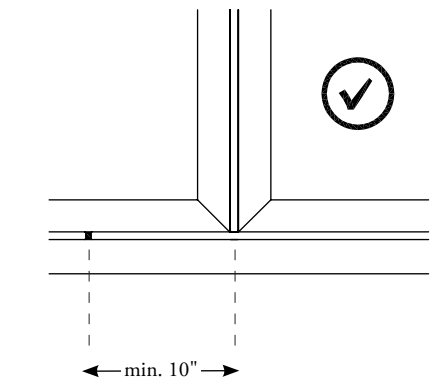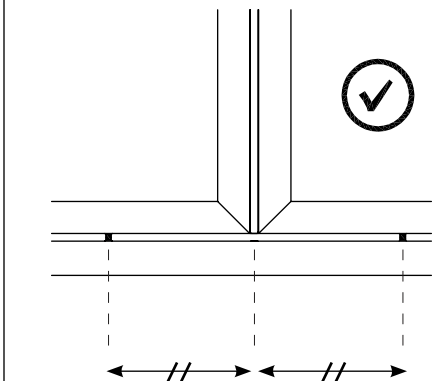
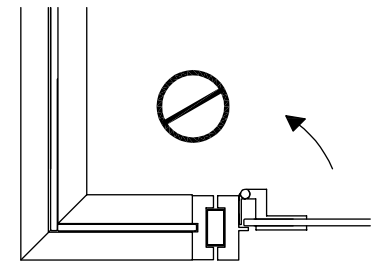
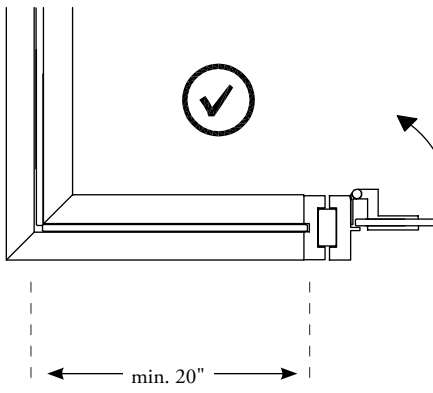
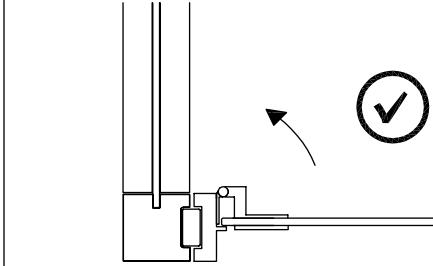
restriction	solution 1	solution 2
 Three-Way Corner Connection (FZCY3/FXCY3) should not happen on or near the seam of the opposing run of glass.	 The minimum recommended distance from a seam to the connection is 10".	 The ideal solution is to place the connection in the center of a face of glass.
 A Two-Way 90° Corner Connection (FZCY2/FXCY2) cannot be used to attach a Glass Panel (FZGP/FXGP) to a Door at a 90° angle.	 Offset the door from the corner by installing a 20" wide (minimum width) Glass Panel (FZGP/FXGP) between the corner and the door.	 • Install a Two-Way 90° Corner Connection with Door (FZCZ2/FXCZ2) • Note the difference in the aesthetic. An anodized or painted aluminum extrusion will be visible in the corner.

planning with optos connections (continued)

optos to optos

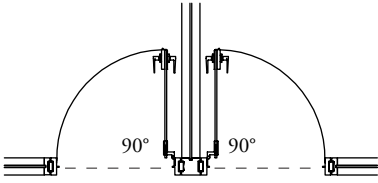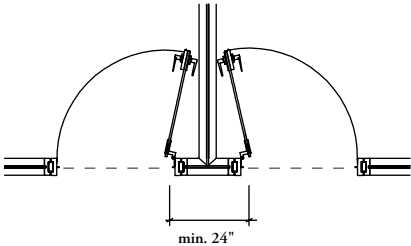restriction	solution 1	solution 2
 A Three-Way Connection with Two Doors (FZCZ3B/FXCZ3B) at 180° is restricted to a maximum door swing of 90°.	 Plan with the Three-Way Corner Connection (FZCY3D/FXCY3D) to create a three-way glass connection and separate the doors (minimum 24").	 Place the door hinge on the opposite side to allow for 180° of swing.

optos to altos

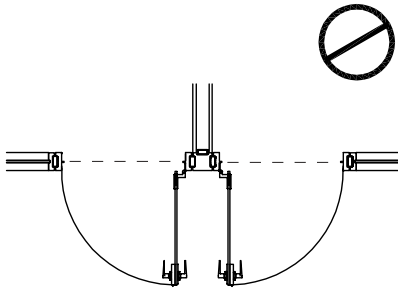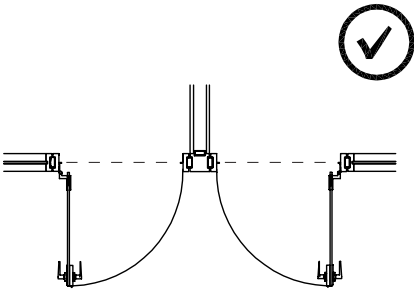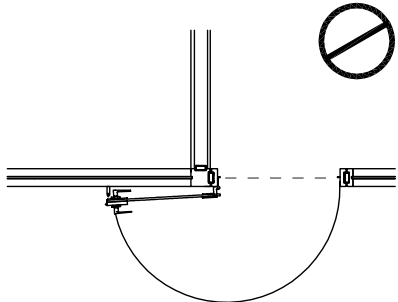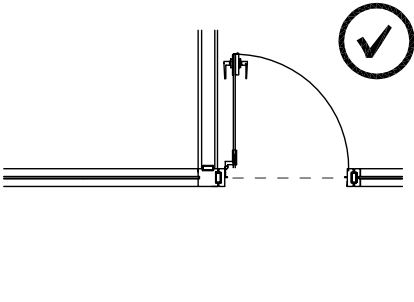
restriction	solution 1
 Back to back door openings into corridors or rooms should be avoided.	 Change the swing direction of both doors by placing the hinges on the opposite side.
 It is not recommended to use a hinged 180° swing door that swings into a hall.	 Change the direction of the door swing so that it swings away from the hall and into the room.

planning with optos connections (continued)


The following should be taken into consideration when planning with articulating two-way and three-way corner connections with faceted modules and straight run Optos.

When planning with articulating corner connections the configuration options are based on the storefront

articulating two-way corners

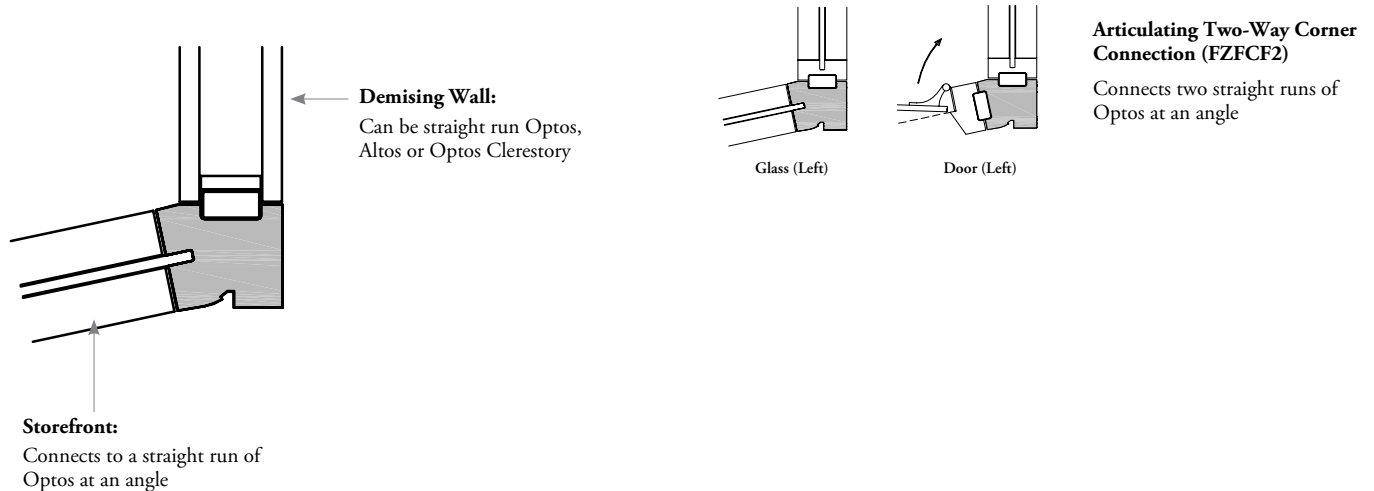

articulating three-way corners

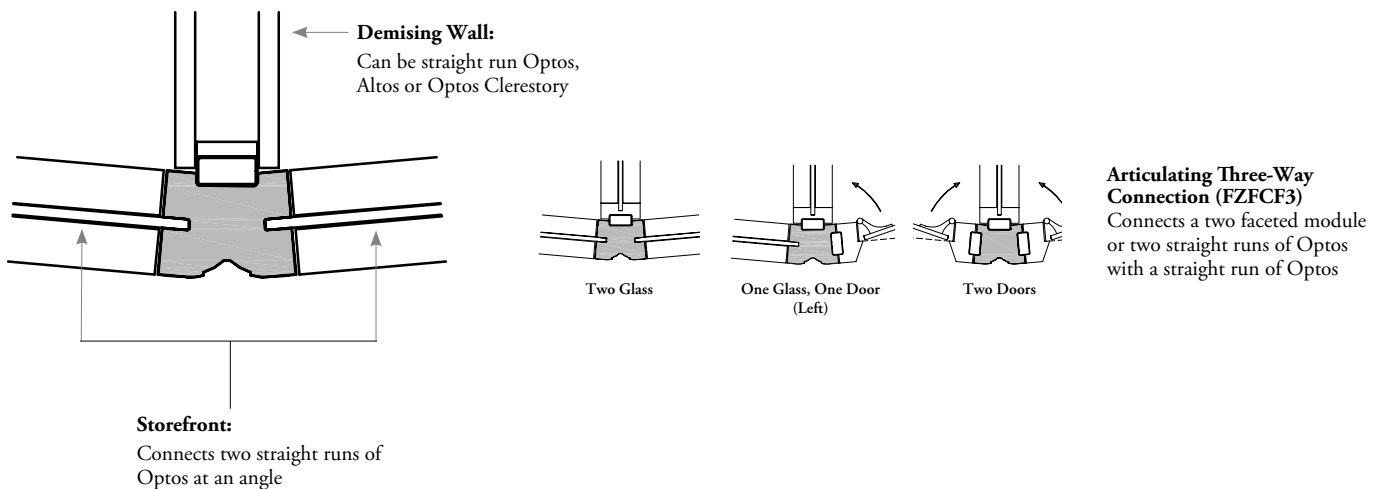

clerestory –
10mm & 12mm

clerestory – 10mm & 12mm


CLERESTORY BASICS 110

PLANNING WITH OPTOS CLERESTORY 114

clerestory basics

An Optos clerestory module consists of Optos clerestory above 84" and Altos below

- If a finished wall end is required for an Optos Clerestory module wall, use the Optos (FZFF/FXFF)
- If a filler panel is required with an Optos Clerestory wall, use the Optos Adjustable Wall Start (FZWS/FXWS)

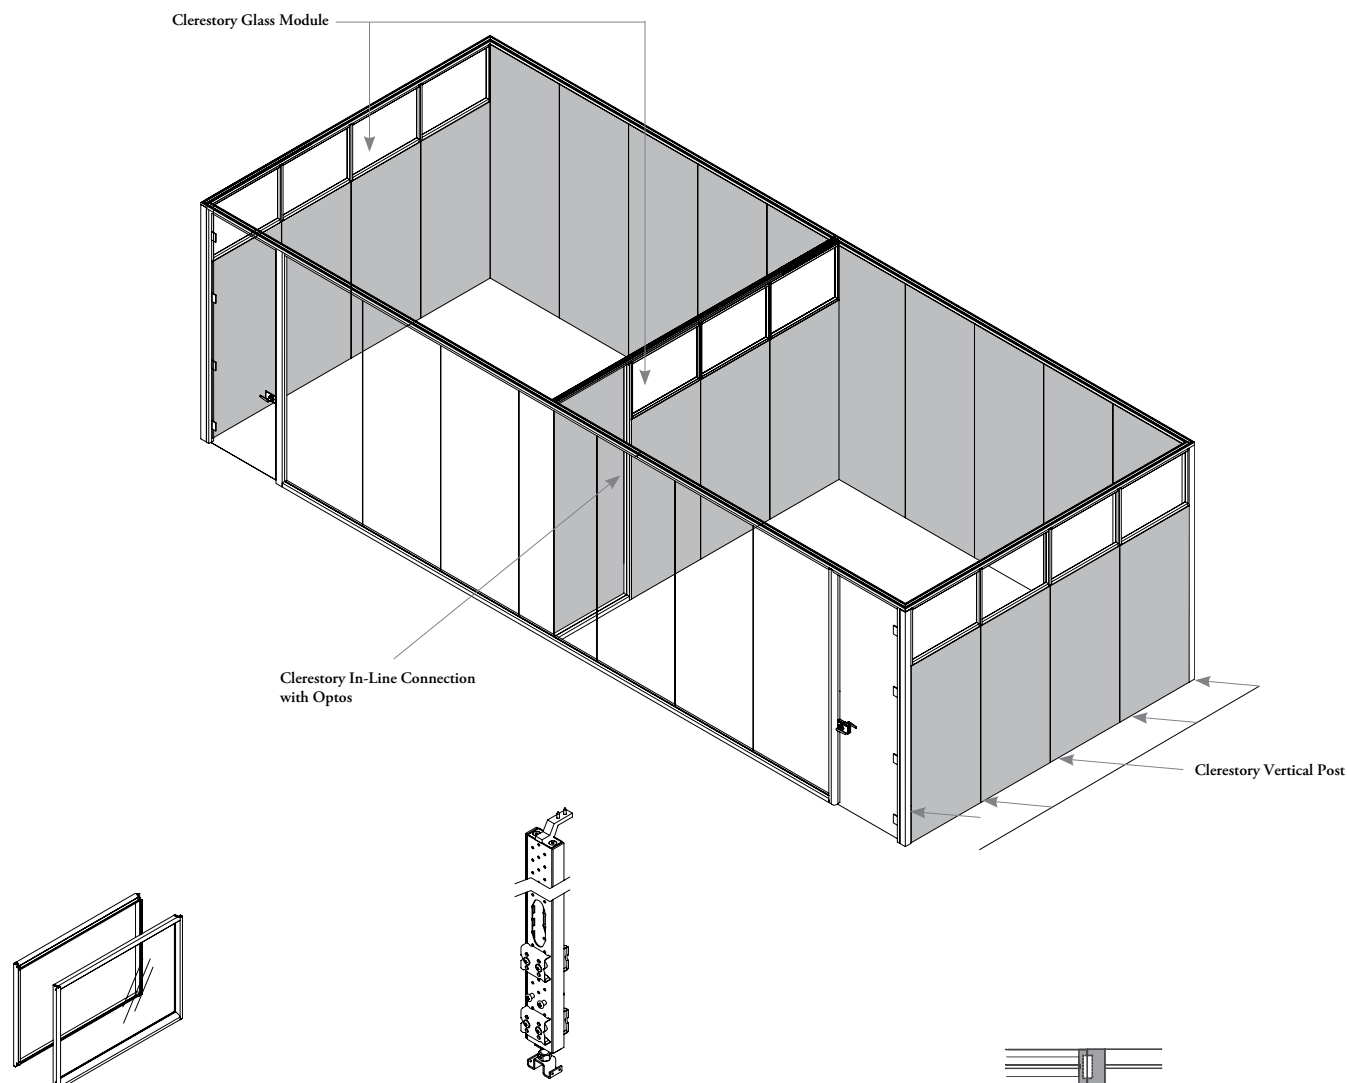

Clerestory Glass Module (FZCGM/FXCGM)

- Is a framed, single centered glass fascia
- Glass is 6mm and available in tempered or laminated
- Tempered glass is available in Clear and Clear Low Iron
- Laminated glass is available in Clear, Frost and Vanceva Specialty Glass
- Frame is available in a Clear Anodized or Painted finish
- Available in 1" height increments of 10"-36" and in 1/8" width increments of 12"-48"
- Textured Glass is not available



Clerestory Vertical Post (FZCFV/FXCFV)

- Is the full height vertical support for walls with Optos clerestory modules.
- Includes enough Fascia connectors and bolts to support horizontal mounting at up to three levels (working wall)
- Is used to connect a clerestory module to another clerestory module or to an Optos wall or to a corner connection.
- Available in 1" height increments of 94"-120"

Clerestory In-Line Connection with Optos (FZCCX1/FXCCX1)


- Connects a wall with Optos clerestory in line with a full-height Optos wall
- Available in a Clear Anodized or Painted finish
- Available in 1" height increments of 94"-120"

clerestory basics (continued)

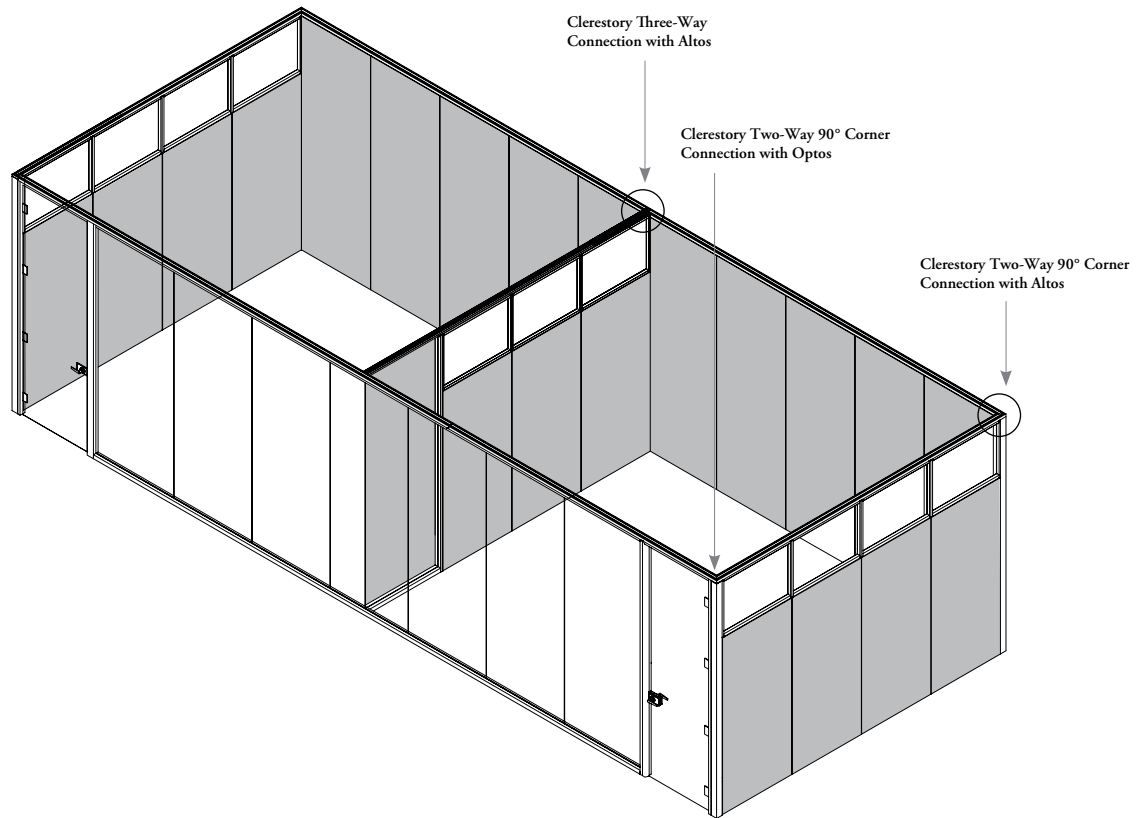


Clerestory Two-Way 90° Corner Connection with Optos (FZCCX2/FXCCX2)

- Connects an Optos clerestory wall to a full-height Optos wall or Optos door frame at 90°
- Available in a Clear Anodized or Painted finish
- Available in 1" height increments of 94"-120"



Clerestory Two-Way 90° Corner Connection with Altos (FZCCA2/FXCCA2)

- Connects an Optos clerestory wall with an Altos wall at 90°
- Available in a Clear Anodized or Painted finish, Fascia Laminates or Flintwood
- Available in 1" height increments of 94"-120"





Clerestory Three-Way Connection with Altos (FZCCA3/FXCCA3)

- Connects an Optos clerestory wall with two Altos walls
- Available in a Clear Anodized or Painted finish, Fascia Laminates or Flintwood
- Available in 1" height increments of 94"-120"

clerestory basics (continued)


An Optos clerestory module consists of Optos clerestory above 84" and Altos below.

- If a finished wall end is required for an Optos Clerestory module wall, use the Filler Panel (FZFF/FXFF)
- When a filler panel is used, a Adjustable Wall Start (FZWS/FXWS) is required

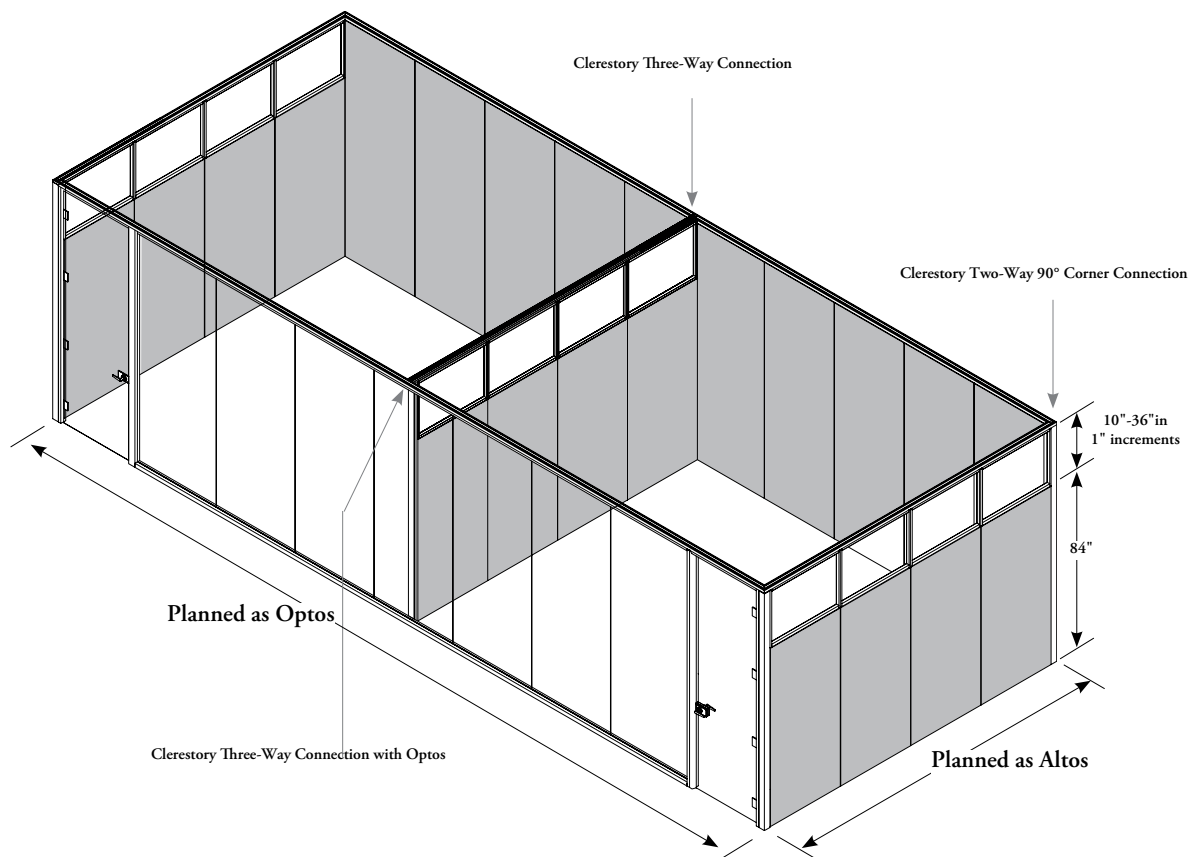


Clerestory Two-Way 90° Corner Connection (FZCCY2/FXCCY2)

- Connects two Optos clerestory walls at 90°
- Available in a Clear Anodized or Painted finish, Fascia Laminates or Flintwood
- Available in 1" height increments of 94"-120"



Clerestory Three-Way Connection (FZCCY3/FXCCY3)

- Connects three Optos clerestory walls
- Available in a Clear Anodized or Painted finish, Fascia Laminates or Flintwood
- Available in 1" height increments of 94"-120"




Clerestory Three-Way Connection with Optos (FZCCX3/FXCCX3)

- Connects an Optos clerestory wall with two Optos walls or two Optos door frames
- Available in a Clear Anodized or Painted finish
- Available in 1" height increments of 94"-120"

clerestory basics (continued)

Optos clerestory walls must be used in conjunction with an Optos wall and cannot be used to create enclosures on their own.


- Optos clerestory is used above an 84" high Altos module
- Clerestory modules help to maintain a uniform and continuous look between Optos and Altos wall systems
- Planning with Optos clerestory on demising walls and back walls of private offices maximize light transmission while maintaining functionality and privacy
- Clerestory modules follow Altos planning rules
- Solid Altos Fascias below the Optos clerestory can provide added functionality such as whiteboards, tackboards and the ability to hang furniture

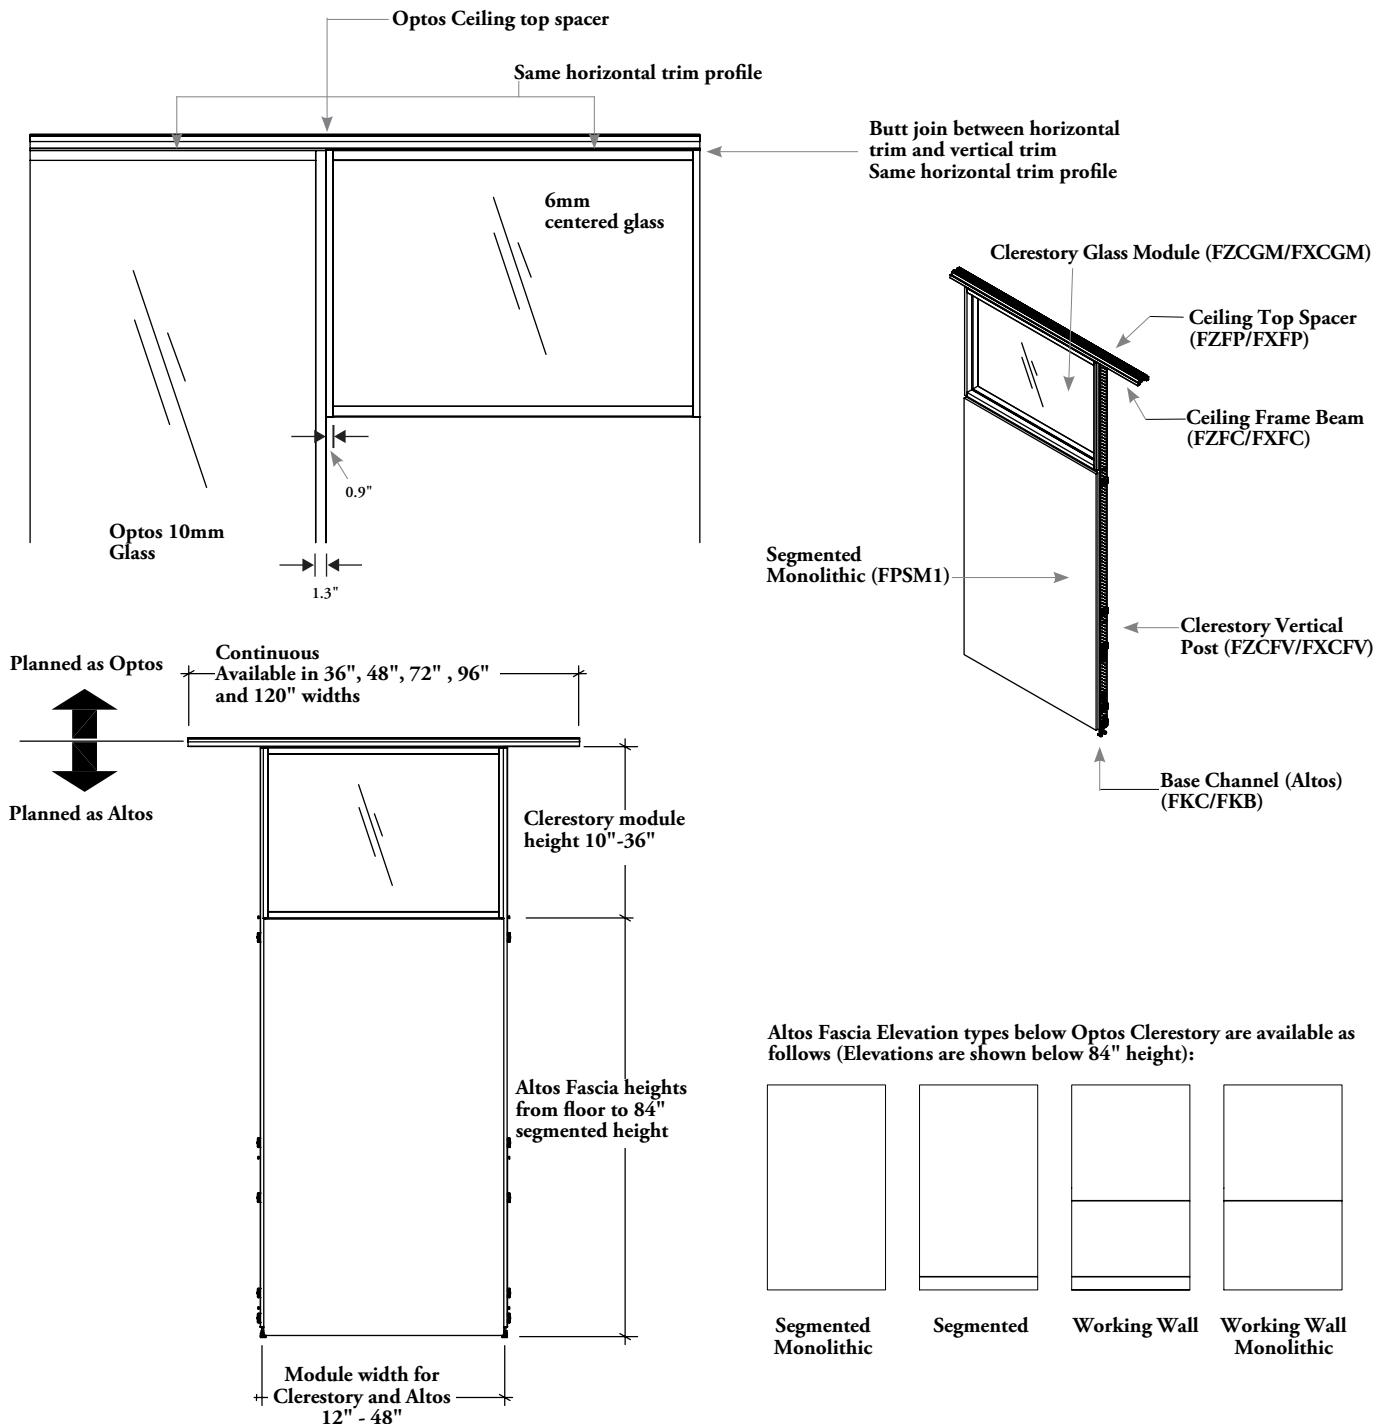



planning with optos clerestory

The following details should be taken into consideration when planning with Optos clerestory.

When an Optos Clerestory Wall connects to an existing building, the Altos Wall Start (FKW) is used.

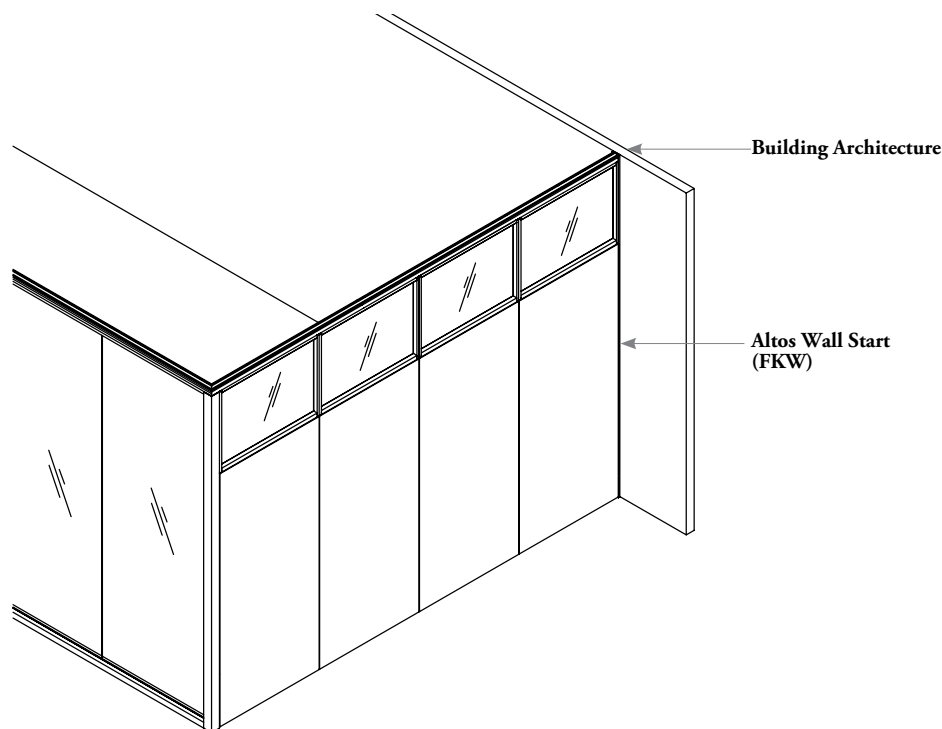


- Optos clerestory cannot be used above Optos or Altos doors
- It can only be used above Altos Fascias

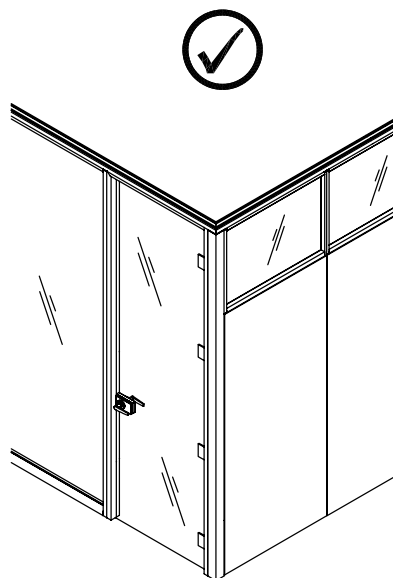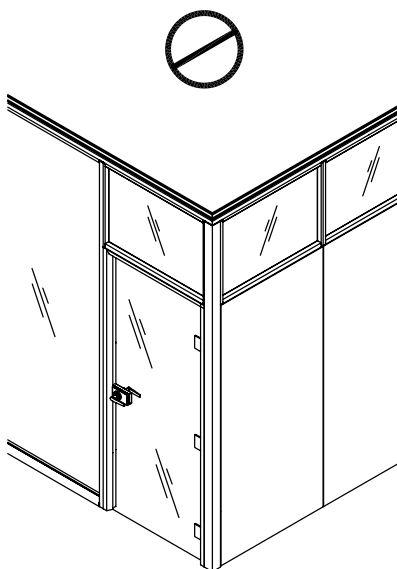



planning with optos clerestory (continued)

The following details should be taken into consideration when planning with Optos clerestory.

Optos clerestory cannot be used in-line with Optos doors.

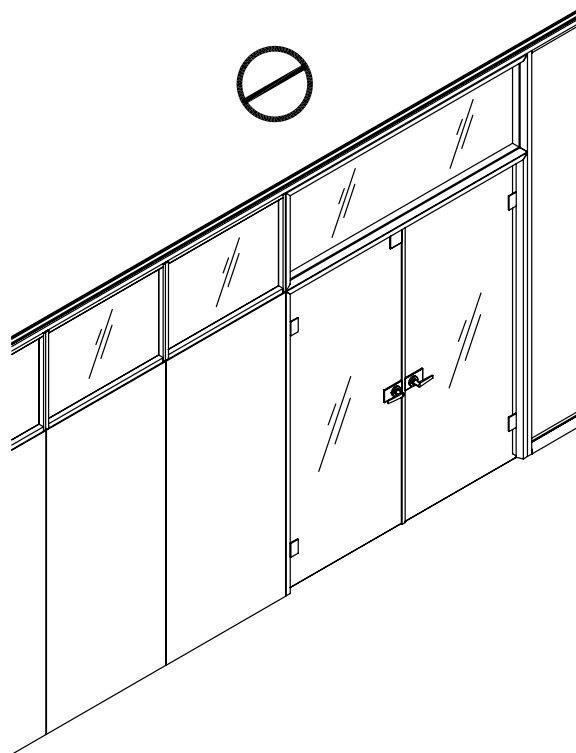

- Optos clerestory cannot connect inline with Altos. Inline connections can only be made with Optos or another Optos Clerestory module
- Optos clerestory must be used in conjunction with an Optos wall

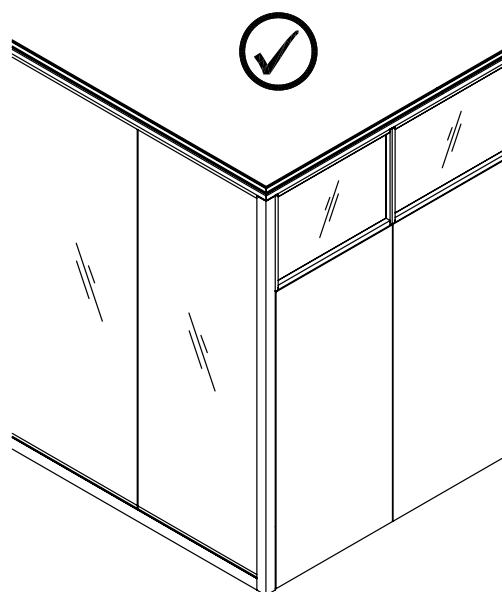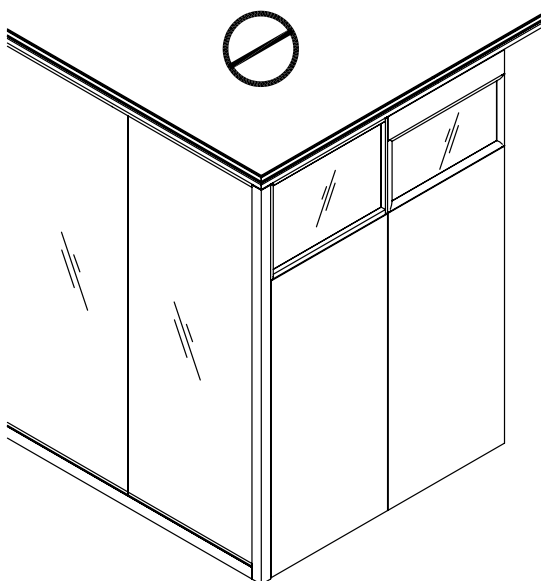

electrics

electrics



ELECTRICS BASICS 118

PLANNING WITH ELECTRICS 119

electrics basics


An Electrical Side Panel is available to accommodate a light switch module or an Electrical Module.

- The Electrical Side Panel (FZS/FXS) is shown with a Receptacle Module and a Light Switch. The Vertical Cut Out (FZS2/FXS2) would be ordered in this application
- The cut out for the Receptacle Module comes pre-cut in the panel and the cut out for the Light Switch would be cut on site

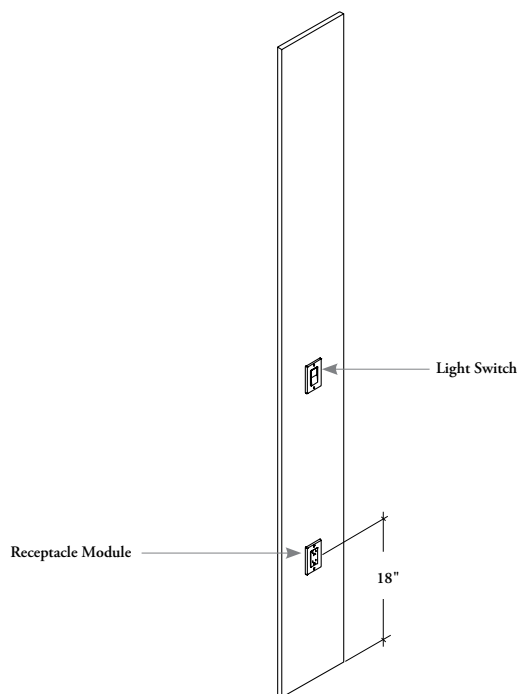

Receptacle Module (ERM)

- Allows power to be used in an Optos Application
- An Electrical Side Panel with Vertical Cut Out (FZS2/FXS2) must be specified to accommodate the Module
- Module will be mounted at 18" from floor



Light Switch (ELS)


- Allows for a light switch in an Optos Application
- An Electrical Side Panel without Vertical Cut Out (FZS1/FXS1) must be specified to accommodate this Module. The opening to accommodate the Switch is to be cut on-site

application guide

planning with electricians

The following two conditions should be considered when incorporating the Electrical Side Panel.

- Electrical Side Panels (FZS/FXS) are used near door openings to house electrical switches and receptacles
- The Electrical side panel must be used under a Ceiling Frame Beam and not under spans of the Sliding Door Rail. The panel should therefore be planned on the side adjacent to a Sliding Door where the rail is not used
- Power can be brought in through the top or bottom channel of the Electrical Side Panel

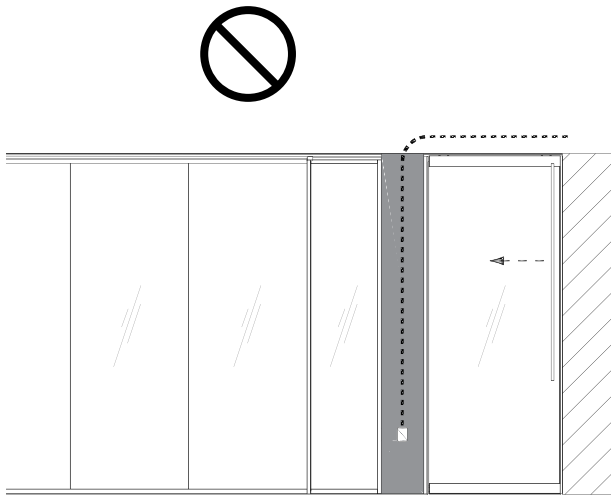


Power cannot be run through the top of the sliding door Rail




The electrical panel should be placed on the opposite side

It is advisable to avoid the use of an Electrical side panel at an in line Optos to Altos transition. Instead use the internal electrical routing capabilities of Altos.

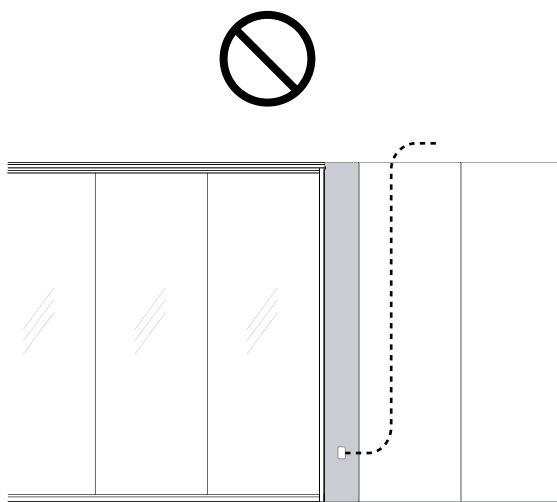

Optos Electrical Side Panel Altos

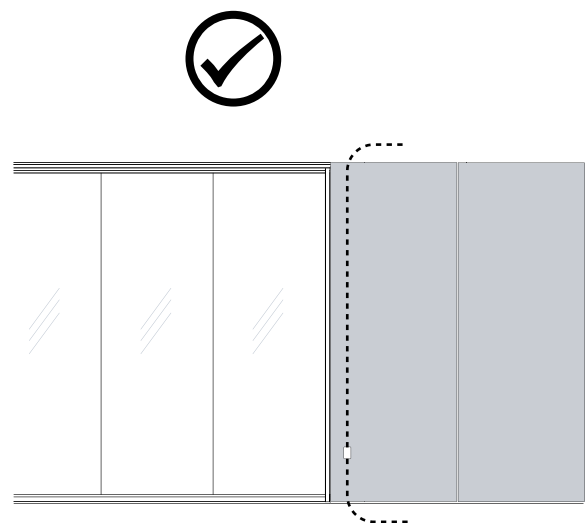

Optos Altos

- Power cannot be brought through the Optos vertical and into the Electrical Side Panel
- See Altos application guidelines for bringing power through Altos

Power should be run through the top or bottom of Altos panels

teknion

www.teknion.com

CAN/US/INT 11-24
©Teknion 2025

®, ™ trade marks of Teknion Corporation
and/or its subsidiaries or licensed to it.
Patents may be pending.

Some products may not be available in
all markets. Contact your local Teknion
Representative for availability.

NOV25-OPT-PG